Project Name:

Fixture Type:

Fixture Code:

Quantities:



## **GENERAL SPECIFICATION**

#### Housing

: Round metal frame consisting of modules combined together for electrical and mechanical connection. Bubble 3D supplied in the following diameters: 1000mm (39.4"), 1800mm (70.9") and 2800mm (110.0").

#### **Drivers**

Luminaires supplied with two power supply box included electronic drivers 120/277V, dim 0-10V (10%). Connection of the power cords (approx 6) to the remote drivers by others.

#### Finish

White RAL 9003.

## **OPTICS & FEATURES**





Suspended 3 sides

General Diffuse

#### Lenses

Injection molded, UV stabilized, opal polycarbonate. Lenses are sectional with subtle but visible seams. Bubble 1000, 3 lenses; Bubble 1800, 8 lenses and Bubble 2800, 16 lenses.

#### **Power cables**

Luminaires, supplied with 13.5m/35' of cable. Cables can be extended to a maximum overall distance of 20m/64'. *Custom cable lengths can be supplied to special order.* 

#### **Delivered Lumens**

Delivered lumens & LPW based on 3000K (min 80 CRI).

## **HOW TO ORDER**

#### A. LUMINAIRE

BCBT500P BCBT500P BCBT501LP BCBT501LP

B. CCT

**30** 3000K (min 80 CRI) 35 3500K (min 80 CRI) 40 4000K (min 80 CRI)

## **C. ACCESSORIES**

150A031VE Umbrella tool for assembly/installation of Bubble (required only for 110" dia.). Retains structural integrity during the installation process

1. One required per order

## **TECHNICAL DATA**

# **LUMINAIRE**

Code BCBT500P BCBT501LP Adjustable Low Profile Type

Power (LED) 564W+333W+173W 564W+333W+173W

**Delivered Ims** 70753 70753 Weight 286.6lb 286.6lb

### **APPROVALS**














# **DIMENSIONAL DIAGRAMS**

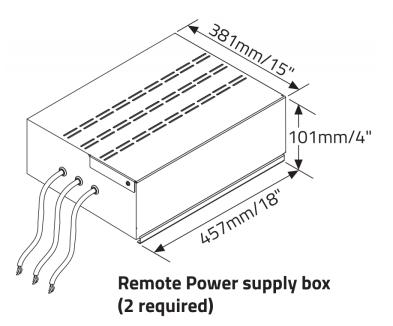


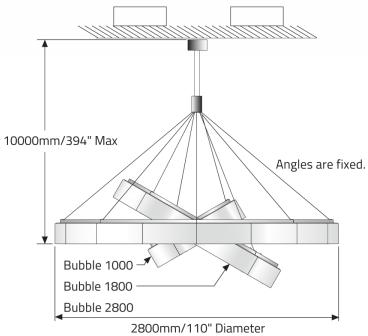


# Adjustable pendant option

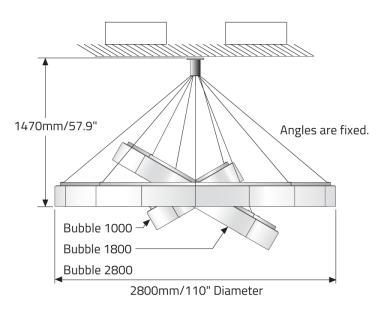

**Low Profile Pendant option** 

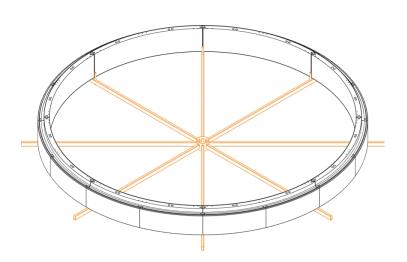

Umbrella tool for assembly

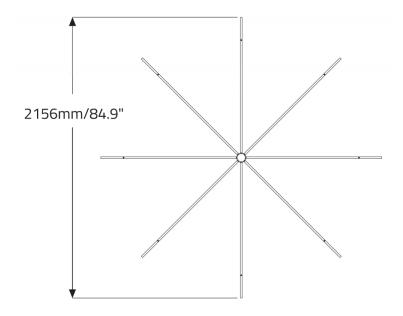

**150A031VE UMBRELLA**