

# BUBBLE RGB™ - 2800

Project Name:	Fixture Type:
Fixture Code:	Quantities:



# BUBBLE RGB™ - 2800

## GENERAL SPECIFICATION

### Housing

Round metal frame consisting of modules combined together for electrical and mechanical connection. Bubbles supplied in the following diameter of 2800mm (110.0").

### Drivers/power supplies

Luminaires supplied with electronic drivers/DMX interfaces, 120/277V.

### RGB control

Luminaires require a DMX controller by others.

### Finish

White RAL 9003.

### Diffusers

Injection molded, UV stabilized, opal polycarbonate. Diffusers are sectional with subtle but visible seams. Bubble 2800, 16 diffusers.

### Power cables

Luminaires supplied with 7.8m/20' of cable. Cables can be extended to a maximum overall distance of 20m/64'. *Custom cable lengths can be supplied to special order.*


### Mechanical

Luminaires mount directly over a junction box.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## OPTICS & FEATURES



Suspended Direct

# BUBBLE RGB™ - 2800

## HOW TO ORDER

### A. LUMINAIRE

**BCBE28** BCBE28

### B. POWER SUPPLY

**IPSDX** Integral Power Supply with DMX Interface

**RPSDX** Remote Power Supply with DMX Interface

### C. SUSPENSION

**LP** Low Profile Pd (8 suspension cables connected to the central joint)

**AP** Adjust. Pd (8 cables connected to central joint & 4 adjust. cables)

**CM** Ceiling Mount (8 suspension cables L=79")

LP (Low Profile Pd) option not available with IPSDX (Integral Power Supply with DMX Interface)

### D. ACCESSORIES

**150A031VE** Umbrella tool for assembly (Retains structural integrity during the installation process)

- 1. One required per order.

## TECHNICAL DATA

### LUMINAIRE



Code	BCBE28
Diameter	110"
Power (LED)	264W RGB
Weight	165.3lb

## APPROVALS




BUBBLE RGB™ - 2800


DIMENSIONAL DIAGRAMS

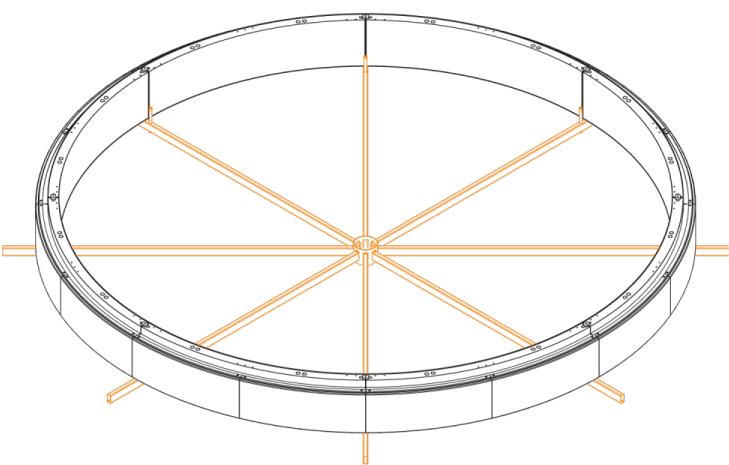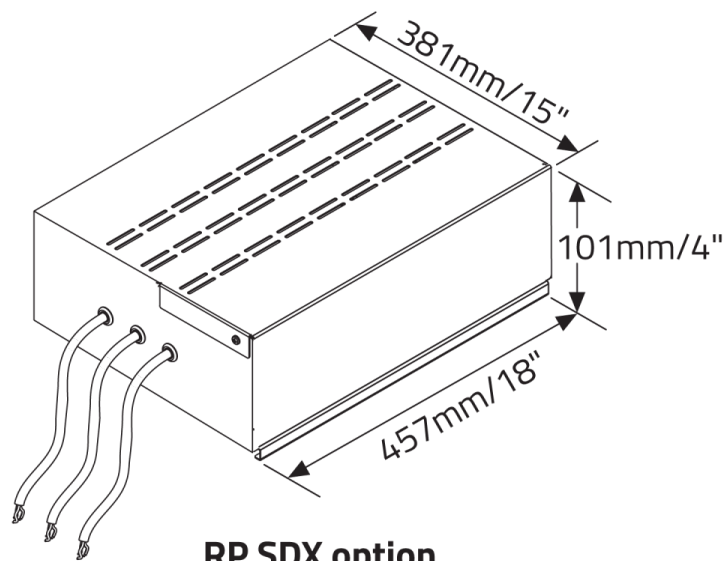

Umbrella tool for assembly

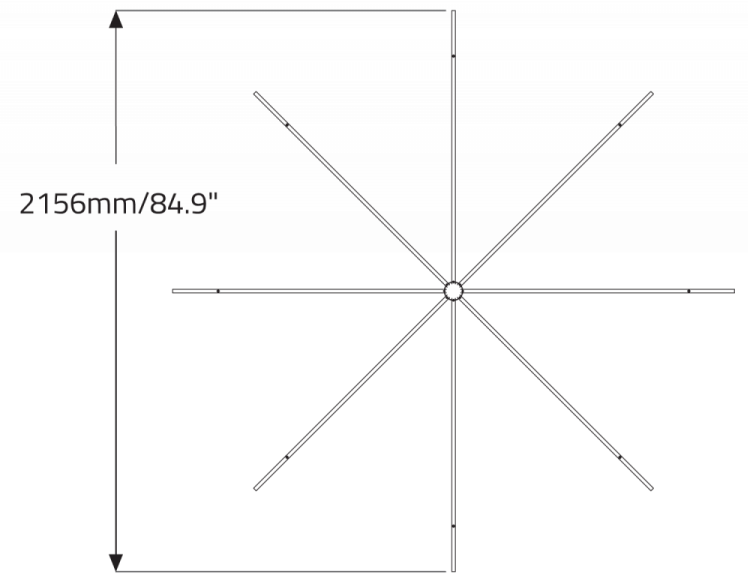


150A031VE UMBRELLA

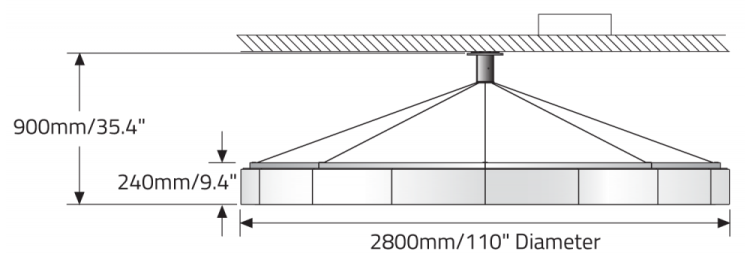


Low Profile Pendant option


BUBBLE RGB™ - 2800

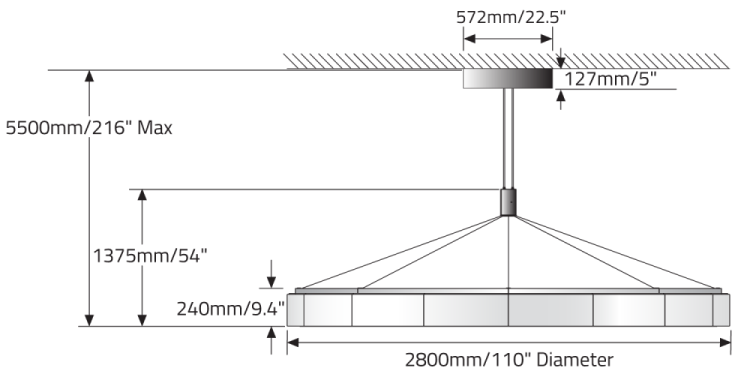


**Adjustable Pendant  
with IPSDX option**

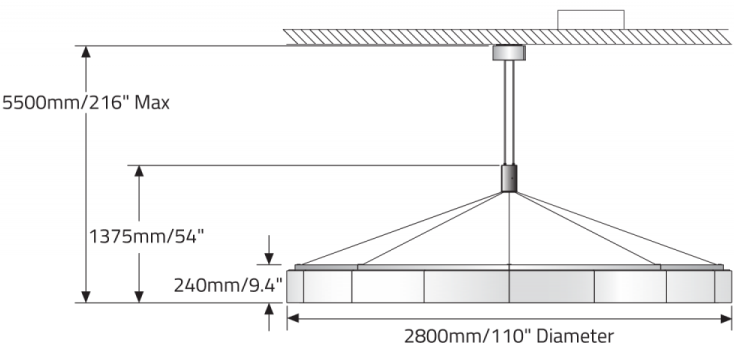

**Adjustable Pendant  
with RPSDX option**

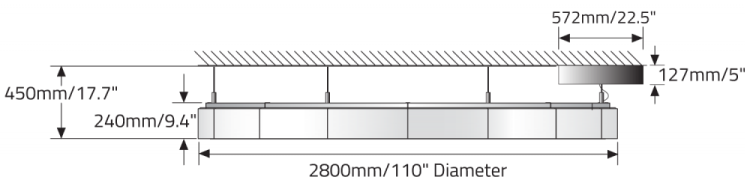

**Ceiling Mounting  
with IPSDX option**

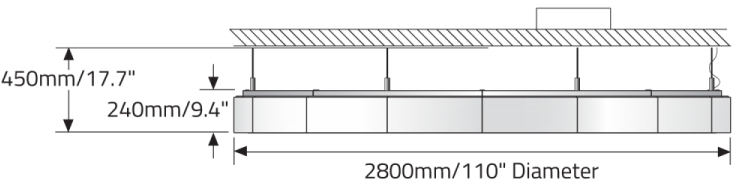

**Ceiling Mounting  
with RPSDX option**