
BUBBLE UP RGBW™

FULL SPECIFICATION SHEET

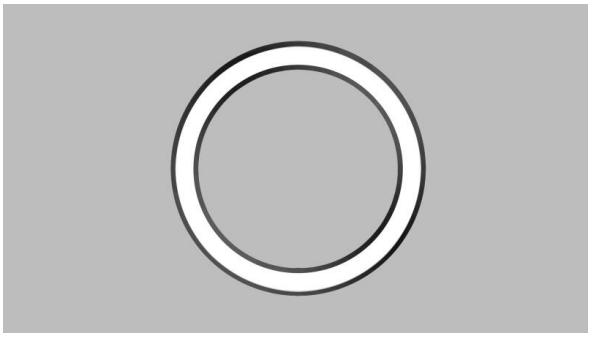

FIXTURE TYPE	FIXTURE CODE	QUANTITIES

1 DESCRIPTION

No shape evokes harmony, community, and perfection quite like the circle. **BUBBLE UP** is a family of recessed circles ranging from 27" to 59" in diameter, offering a variety of light combinations to complement design themes from elegant to whimsical. Constructed with a single piece of opal acrylic for the lens, aluminum rings, and white-painted screws, this refined recessed fixture transcends contemporary architecture, perfectly blending into modern interiors.

2 OPTICS & FEATURES


Recessed


Direct



Declare

3 APPROVALS

Intertek CE IP20

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

4 GENERAL SPECIFICATION

RECESSED HOUSING
Steel and aluminum suitable for new or existing non insulated construction, drywall or plasterboard ceilings. Luminaires are mounted by cable suspension within the ceiling cavity. Anchoring of cables to load bearing ceiling structure (by others).

CENTRE DISC
For non illuminating center version, drywall disc to be supplied and installed by others. Drywall disc to be painted to match ceiling.

VERSIONS
Recessed luminaires available in three diameters: 685mm/27", 1092mm/43" and 1495mm/59".

ELECTRICAL
Through branch wiring. J box and driver housing easiliy accessible.

DELIVERED LUMENS
Delivered lumens and LPW based on 3000K (min 80 CRI).

APPROVALS
Damp location, (Indoor use only).

DRIVERS
Luminaires supplied with HPF electronic drivers, 120/277V. 0-10V dimming standard for white LEDs. The ballast in integral to the fixture housing.

LENSES
Single piece opal acrylic, retained by metal rings and white painted screws.

RGB DRIVERS/POWER SUPPLIES
Luminaires supplied with electronic drivers/DMX interfaces, 120/277V.

SENSORS
Consult factory regarding sensor compatibility.

FINISH
White powder coated.

SUSTAINABILITY
Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

5 HOW TO ORDER

LUMINAIRE

941001 27", Ring of White LEDs, 4076 lms
941011 43", Ring of White LEDs, 6764 lms
941021 59", Ring of White LEDs, 9788 lms
941101 27", Ring of RGB LEDs
941111 43", Ring of RGB LEDs
941121 59", Ring of RGB LEDs
941201 27", Ring of White LEDs/RGB Center
941211 43", Ring of White LEDs/RGB Center
941221 59", Ring of White LEDs/RGB Center
941301 27", Ring of RGB LEDs/White LED Center
941311 43", Ring of RGB LEDs/White LED Center
941321 59", Ring of RGB LEDs/White LED Center

CCT

30 3000K
35 3500K
40 4000K

OPTIONS

3 347V

6 TECHNICAL DATA


LUMINAIRE


Code	**941001**	**941011**	**941021**	**941101**	**941111**	**941121**
Light Distribution	Ring of White LEDs	Ring of White LEDs	Ring of White LEDs	Ring of RGB LEDs	Ring of RGB LEDs	Ring of RGB LEDs
Diameter	27"	43"	59"	27"	43"	59"
Power (LED)	103W	168W	232W	45W	80W	110W
Delivered lms	4076	6764	9788			
Delivered lms (White LEDs only)						
LPW	40	40	42			


Code	**941201**	**941211**	**941221**	**941301**	**941311**	**941321**
Light Distribution	Ring of White LEDs/RGB Center	Ring of White LEDs/RGB Center	Ring of White LEDs/RGB Center	Ring of RGB LEDs/White LED Center	Ring of RGB LEDs/White LED Center	Ring of RGB LEDs/White LED Center
Diameter	27"	43"	59"	27"	43"	59"
Power (LED)	103W+27W RGB	168W+55W RGB	232W+80W RGB	45W RGB+60W	80W RGB+115W	110W RGB+170W
Delivered lms						
Delivered lms (White LEDs only)	4076	6764	9788	2294	4684	7344
LPW				40	40	42


© 2026 Beta-Calco Inc. Specifications are subject to change without notice


7 DIMENSIONAL DIAGRAMS

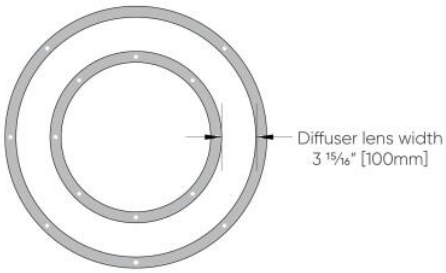


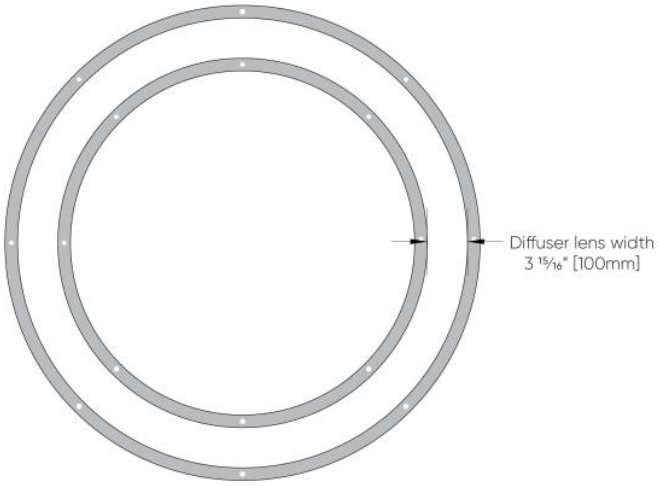

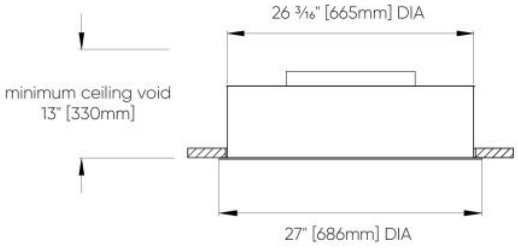

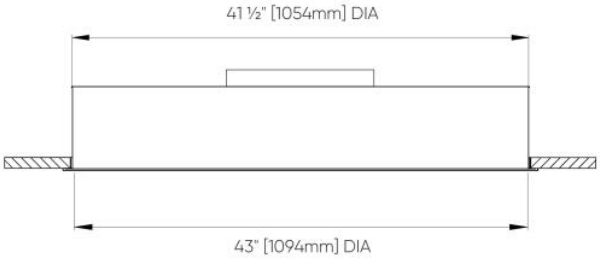

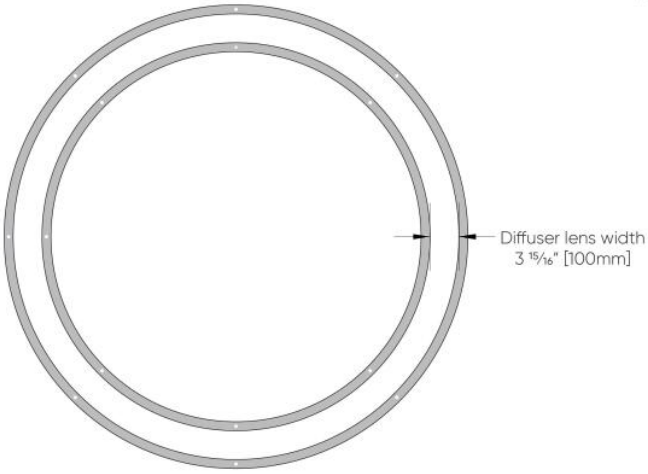

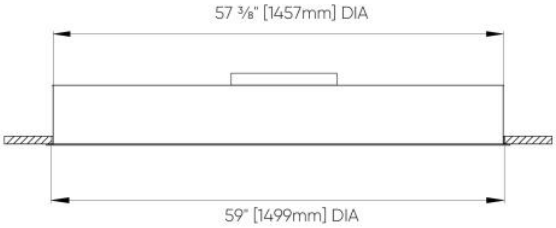

© 2026 Beta-Calco Inc. Specifications are subject to change without notice