BUBBLE™ - 600/1000/1800

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

BUBBLE™ - 600/1000/1800

GENERAL SPECIFICATION

Housing
Round metal frame consisting of modules combined together for electrical and mechanical connections. Bubble comes in the following diameters: 600mm (23.6"), 1000mm (39.4") and 1800mm (70.9").

Power cables
Luminaires supplied with 7.8m/20' of cable. Cables can be extended to a maximum overall distance of 20m/64'. Custom cable lengths can be supplied to special order.

Finish
White RAL 9003.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

Lenses
Injection molded, UV stabilized, opal polycarbonate. Lenses are sectional with subtle but visible seams. Bubble 600, 3 lenses; Bubble 1000, 3 lenses and Bubble 1800, 8 lenses.

Drivers
Luminaires supplied with HPF electronic drivers, 120/277V. 0-10V dimming standard.

L70 @25°C (77°F)
> 50,000 hrs.

OPTICS & FEATURES


Suspended 2 sides


General Diffuse

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

BUBBLE™ - 600/1000/1800

HOW TO ORDER

A. LUMINAIRE

AL1 AL1	**AL2** AL2	**AL3** AL3

B. CCT

J2 3000K (min 80 CRI)	**J3** 3500K (min 80 CRI)	**J4** 4000K (min 80 CRI)

C. INTEGRAL LED POWER SUPPLY

CA0 Canopy with driver not required	**CA1** Canopy with driver for Bubble 600	**CA2** Canopy with driver for Bubble 1000	**CA3** Canopy with driver for Bubble 1800

1. Bubble LED integral power supply in canopy.
2. Canopy included.
3. Only select if you do **not** want a **remote** power supply.

D. REMOTE LED POWER SUPPLY

X0 Remote power supply not required	**X1** Remote power supply for Bubble 600	**X2** Remote power supply for Bubble 1000	**X3** Remote power supply for Bubble 1800

1. Canopy NOT included
2. Select mounting canopy from Canopies for Remote Power Supply below as a separate line item.
3. Max distance from driver to remote box is 50ft.
4. Only select if you do NOT want integral power supply.

E. CANOPY FOR REMOTE LED POWER SUPPLY

Y0 Canopy for remote LED power supply not required	**Y1** Canopy for load bearing ceilings (max 70lbs) for Bubbles 600 & 1000	**Y2** Canopy for load bearing ceilings (max 220lbs) for Bubble 1800	**Y3** Canopy for false ceilings (cables are anchored to the load bearing ceiling)

1. Select only when choosing **Remote** LED power supply

F. LUMEN OUTPUT

L0 100% of standard output	**L1** Lumen & wattage reduction to approximately 75% of standard output	**L2** Lumen & wattage reduction to approximately 50% of standard output

Custom reduction percentages available upon request.

G. SURFACE MOUNTING KITS

BC0 Surface mounting kit not required	**BC1** Surface mounting kit for Bubble 600	**BC2** Surface mounting kit for Bubble 1000	**BC3** Surface mounting kit for Bubble 1800

1. For use with luminaires with **remote** power supply only.
2. **Must be ordered with Y3 canopy.**

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

BUBBLE™ - 600/1000/1800

TECHNICAL DATA

LUMINAIRE


Code	AL1	AL2	AL3
Wattage	96W	173W	333W
Delivered lms	6536	11433	22038
LPW	68	66	66
Diameter (A)	23.6"	39.4"	70.9"
Diameter (B)	17.3"	31.5"	63.0"
Depth (D)	7.5"	9.5"	9.5"
Weight	17.9lbs	35.5lbs	72.8lbs

APPROVALS


© 2026 Beta-Calco Inc. Specifications are subject to change without notice

BUBBLE™ - 600/1000/1800


DIMENSIONAL DIAGRAMS

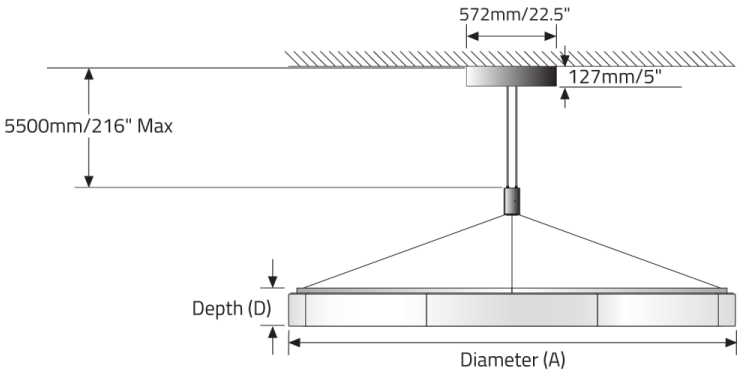


Adjustable Pendant with Integral Power Supply

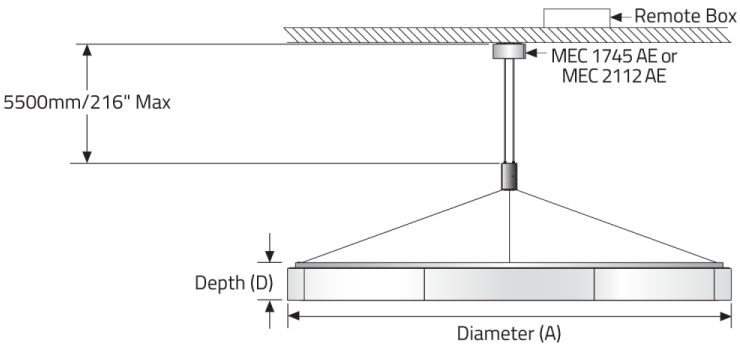


Adjustable Pendant with Remote Power Supply

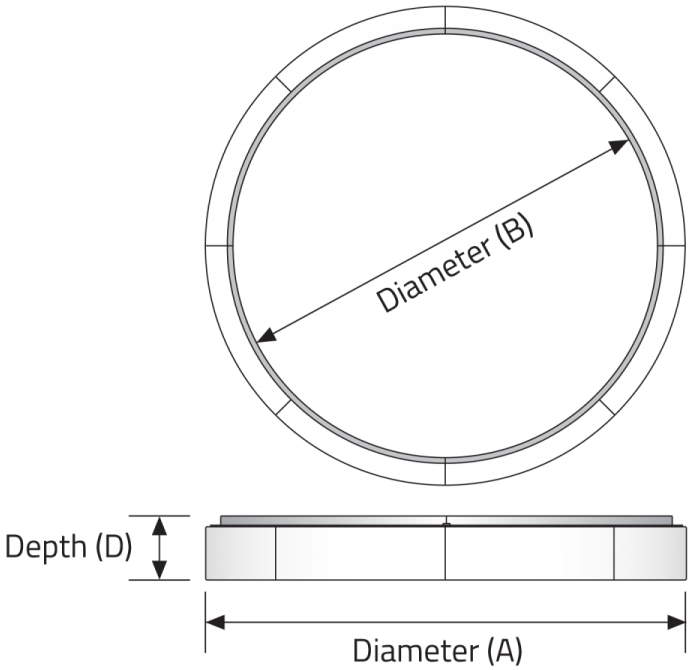

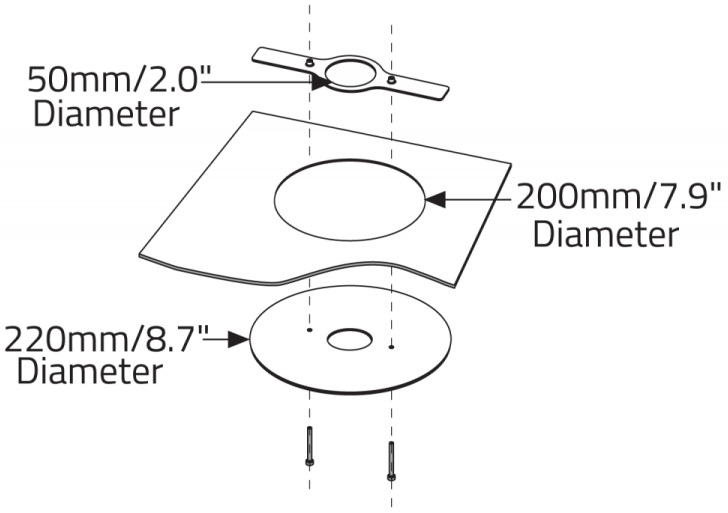


MEC1823AE


© 2026 Beta-Calco Inc. Specifications are subject to change without notice

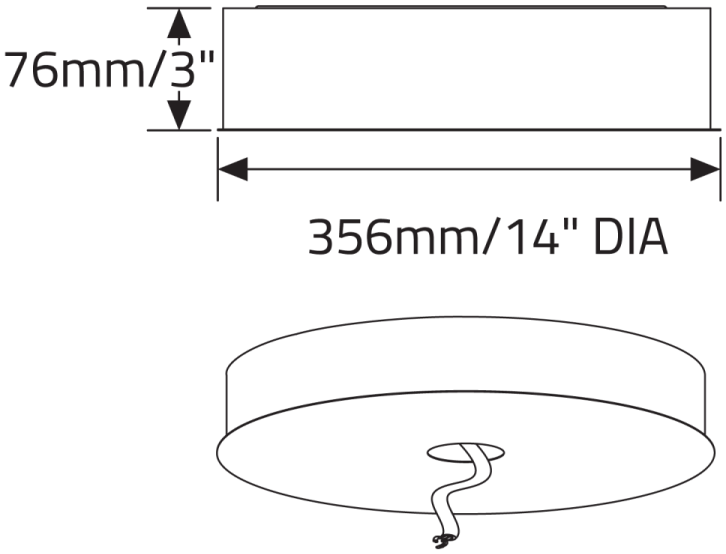


BCLED6/IN
BCLED10/IN
BCLED18/IN

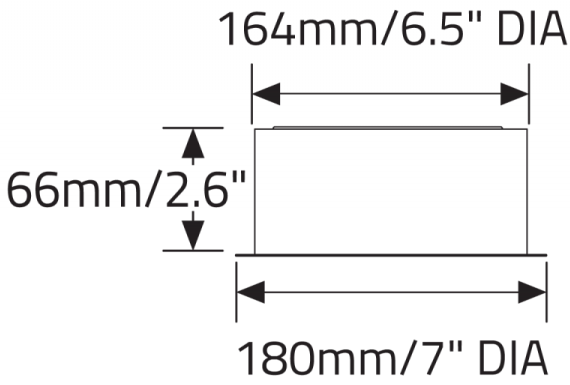

MEC1745AE

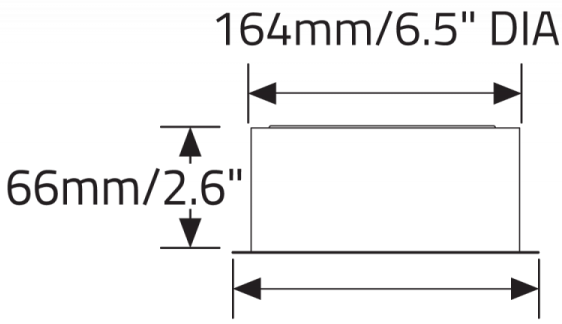


MEC2112AE

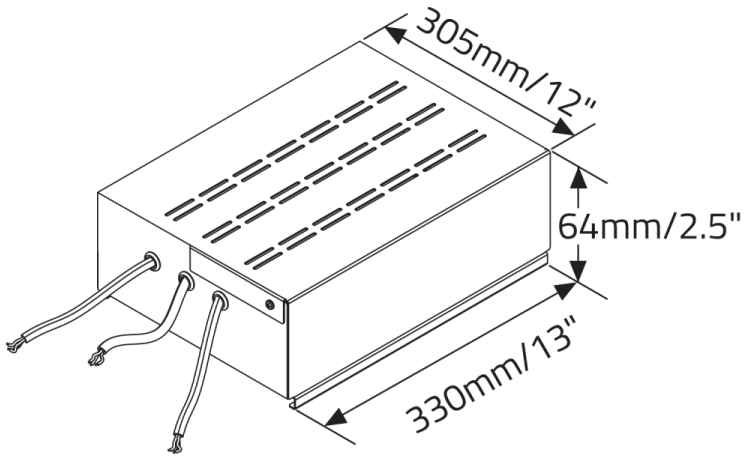


BCLED6/R
BCLED10/R
BCLED18/R

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

BUBBLE™ - 600/1000/1800

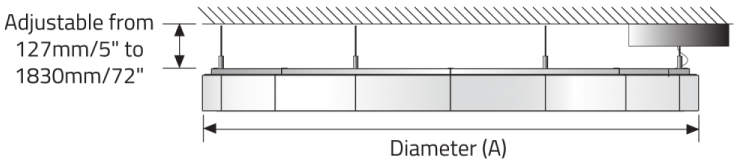

Surface mount - Integral Power supply

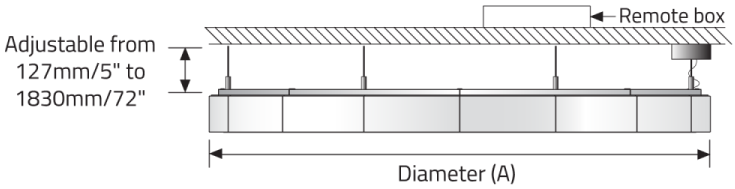

Surface mount - Remote Power supply

© 2026 Beta-Calco Inc. Specifications are subject to change without notice