

BUBBLE RGB™ - 600/1000/1800

Project Name:	Fixture Type:
Fixture Code:	Quantities:



# BUBBLE RGB™ - 600/1000/1800

## GENERAL SPECIFICATION

### Housing

Round metal frame consisting of modules combined together for electrical and mechanical connection. Bubbles supplied in the following diameters: 600mm (23.6") 1000mm (39.4") and 1800mm (70.9").

### Drivers/power supplies

Luminaires supplied with electronic drivers/DMX interfaces, 120/277V.

### RGB control

Luminaires require a DMX controller by others.

### Finish

White RAL 9003.

### Diffusers

Injection molded, UV stabilized, opal polycarbonate. Diffusers are sectional with subtle but visible seams. Bubble 600, 3 diffusers; Bubble 1000, 3 diffusers and Bubble 1800, 8 diffusers.

### Power cables

Luminaires supplied with 7.8m/20' of cable. Cables can be extended to a maximum overall distance of 20m/64'. *Custom cable lengths can be supplied to special order.*


### Mechanical

Luminaires mount directly over a junction box.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## OPTICS & FEATURES



Suspended 2 sides

# BUBBLE RGB™ - 600/1000/1800

## HOW TO ORDER

### A. LUMINAIRE

<b>AM1</b> AM1	<b>AM2</b> AM2	<b>AM3</b> AM3
----------------	----------------	----------------

### B. INTEGRAL POWER SUPPLY

<b>BD0</b> Canopy with power supply and DMX interface not required	<b>BD1</b> Canopy with power supply and DMX interface for Bubble 600	<b>BD2</b> Canopy with power supply and DMX interface for Bubble 1000	<b>BD3</b> Canopy with power supply and DMX interface for Bubble 1800
--	--	---	---

### C. REMOTE POWER SUPPLY

<b>BE0</b> Remote power supply with DMX interface not required	<b>BE1</b> Remote power supply with DMX interface for Bubble 600	<b>BE2</b> Remote power supply with DMX interface for Bubble 1000	<b>BE3</b> Remote power supply with DMX interface for Bubble 1800
--	--	---	---

### D. CANOPY - REMOTE POWER SUPPLY

<b>Y0</b> Canopy for load bearing ceilings not required	<b>Y1</b> Canopy for load bearing ceilings (max 70lbs for Bubble 600 & 1000	<b>Y2</b> Canopy for load bearing ceilings (max 220lbs for Bubble 1800	<b>Y3</b> Canopy for false ceilings or similar (cables anchored to load bearing ceiling)
---	---	--	--

For luminaires with remote power supply only.

### E. SURFACE MOUNTING KITS

<b>BC0</b> Surface mounting kit not required	<b>BC1</b> Surface mounting kit for Bubble 600	<b>BC2</b> Surface mounting kit for Bubble 1000	<b>BC3</b> Surface mounting kit for Bubble 1800
--	--	---	---

For use with luminaires with **remote** power supply only. **Must be ordered with Y3 canopy.**

# BUBBLE RGB™ - 600/1000/1800

## TECHNICAL DATA

### LUMINAIRE


Code	AM1	AM2	AM3
Wattage	45W RGB	80W RGB	156W RGB
Diameter (A)	23.6"	39.4"	70.9"
Diameter (B)	17.3"	31.5"	63.0"
Depth (D)	7.5"	7.5"	7.5"
Weight	17.9lbs	35.5lbs	72.8lbs

## APPROVALS




BUBBLE RGB™ - 600/1000/1800


DIMENSIONAL DIAGRAMS

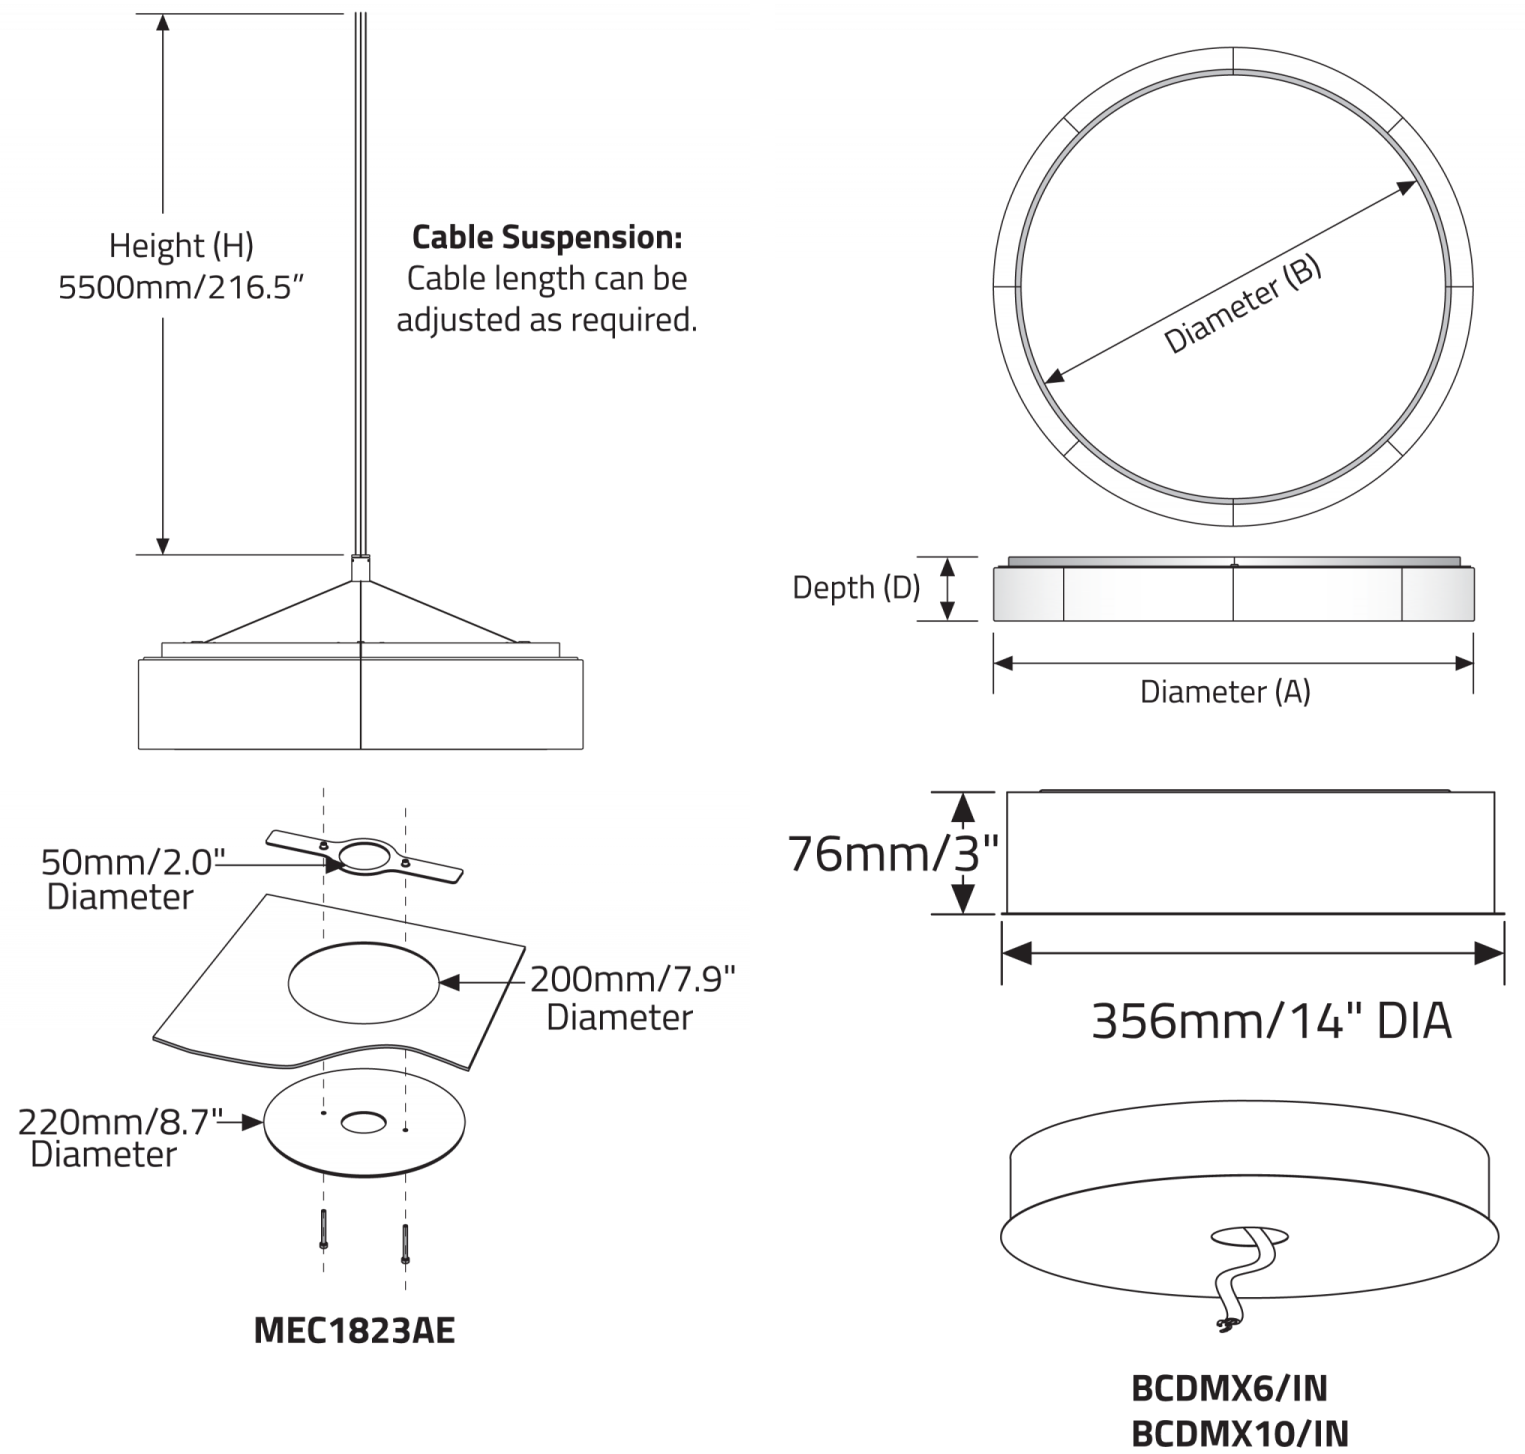


BUBBLE RGB™ - 600/1000/1800

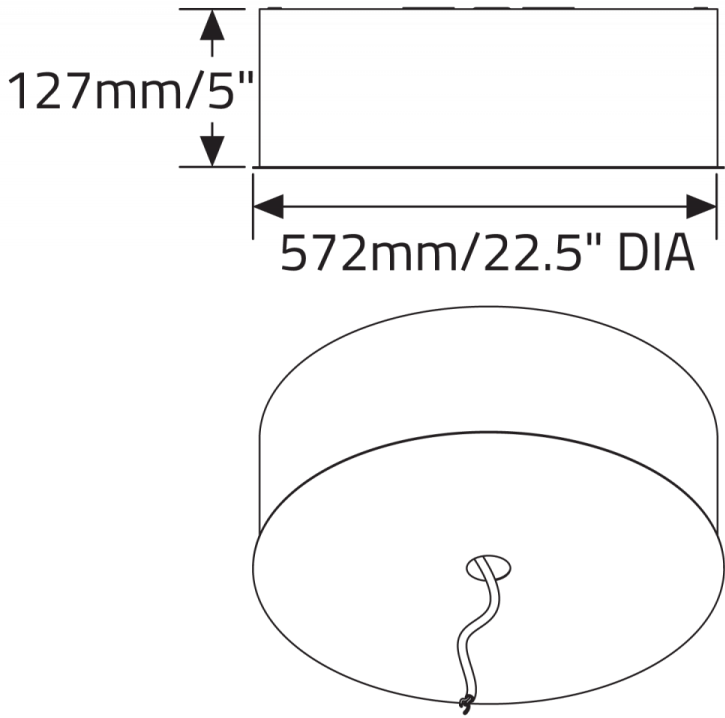


BCDMX18/IN

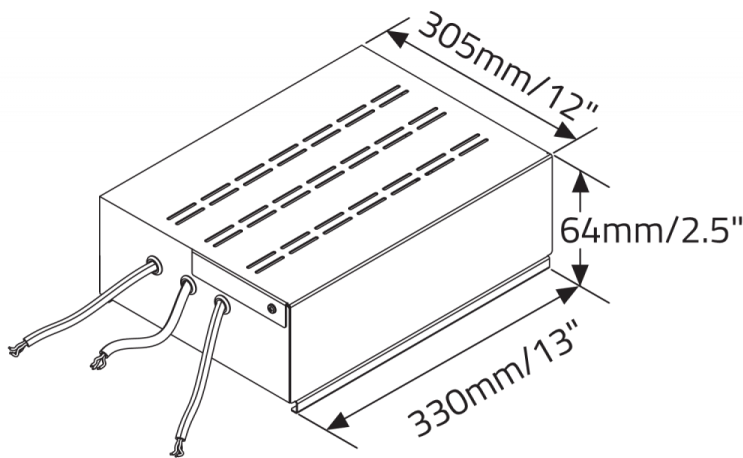


BCDMX18/R

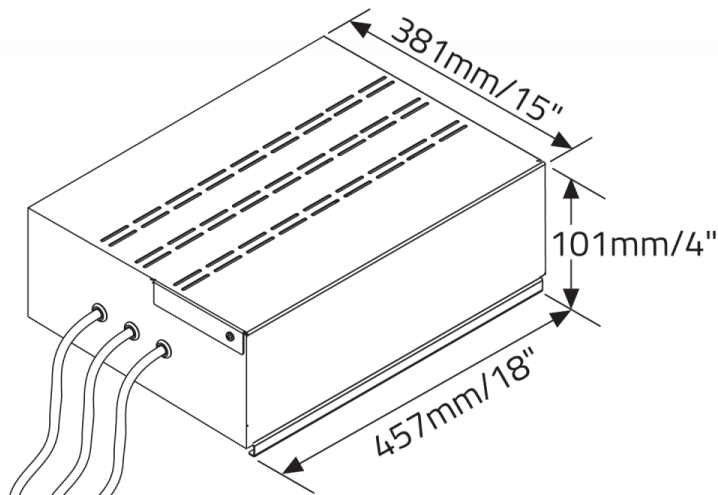

BCDMX6/R  
BCDMX10/R

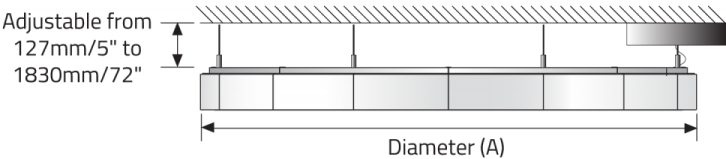

Surface mount - Integral Power supply

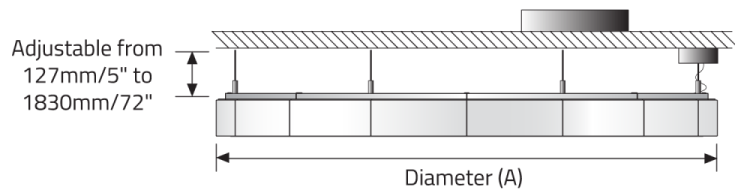

Surface mount - Remote Power supply