

CYLINDER EX™



Project Name:	Fixture Type:
Fixture Code:	Quantities:

A. LUMINAIRE

CYXW Wall	CYXC Ceiling	CYXP Pendant ¹
-----------	--------------	---------------------------

Conduit mount is an option for wall and ceiling versions, consult factory.
¹ Pendant is stem mount only.

B. DIAMETER

DR06 6"

C. DIRECTION

DT1 Direct 10" housing ^{1 2}	DT2 Direct/Indirect 14" housing ³
---------------------------------------	--

¹ Available for wall, ceiling, and pendant.
² Wall mount direct only can be installed pointing up or down.
³ Available for wall mount only.
Direct will have a 10" tall housing
Direct/Indirect will have a 14" tall housing

D. LIGHT SOURCE

DN01 LEDs / Multi-Array Optics	DN02 COB / Reflector
--------------------------------	----------------------

All data based on max output and nominal values.

E. CRI

CR00 Not required (For Amber Light)	CR80 CRI 80+
-------------------------------------	--------------

F. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
CTA62 Amber (Turtle Friendly) ¹			

¹ Available for LED Direct only with 50° direct distribution.

G. DISTRIBUTION DIRECT

BAT2 Type II ¹	BAT3 Type III ¹	BA03 3° ²	BA15 15° ⁴
BA30 30° ⁴	BA50 50° ⁴	BA70 70° ³	

¹ Available for Direct, and LEDs / Multi-Array Optics distribution, not recommended for Indirect use. Available with Direct lumens of 2000 and 3000, not 4000.
² Available for LEDs / Multi-Array Optics distribution and Wall mount. There may be a +/- 250K variance in color temperature. The head is not adjustable.
³ Available for LEDs / Multi-Array Optics distribution.
⁴ Available for LEDs / Multi-Array Optics distribution and COB / Reflector.

CYLINDER EX™

H. DISTRIBUTION INDIRECT

BB00 Not required	BB03 3° ¹	BB15 15° ²	BB30 30° ²
BB50 50° ³	BB70 70° ²		

¹ Available for LEDs, Indirect and Wall version only. There may be a +/- 250K variance in color temperature. The head is not adjustable.

² Available for LEDs / Multi-Array Optics distribution.

³ Available for LEDs / Multi-Array Optics distribution and COB / Reflector.

I. LUMENS DIRECT

LMA0005 59 lms ¹	LMA0040 400 lms ²	LMA0200 2000 lms	LMA0300 3000 lms
LMA0400 4000 lms ³			

¹ Available for 3° Direct distribution.

² Available for Amber (Turtle Friendly) light.

³ Available for Direct only, 15°, 30°, 50°, and 70°.

J. LUMENS INDIRECT

LMB0000 Not required	LMB0005 59 lms ¹	LMB0200 2000 lms	LMB0300 3000 lms
-----------------------------	------------------------------------	-------------------------	-------------------------

¹ Available for 3° Indirect distribution.

K. VOLTAGE

V1 120/277V	V2 240V ¹
--------------------	-----------------------------

¹ Not available in North America

L. DIMMING

DA01 0-10V Dimming 1.0%	DA11 0-10V Dimming 1.0% - Arctic driver ^{1 3}	DA12 0-10V Dimming 1.0% - Desert driver ^{2 3}	DA21 DALI Dimming 1.0% ³
--------------------------------	---	---	--

¹ Capable of operating at -30°C (-22°F) to ambient temperature

² Capable of operating at +50°C (+122°F) ambient temperature

³ Consult factory

M. MOUNTING BRACKET

MB0 Not required	MB1 Narrow - Full ^{1 2}	MB2 Narrow - Standard ²	MB3 Classic - Standard ³
-------------------------	---	---	--

* Mounting bracket finish to match fixture finish.

¹ Only available with Direct/Indirect

² The Wall Narrow versions mount to a 2"x4" switch box (supplied by others).

³ The Wall Classic version mount to a 4"x4" junction box (supplied by others).

N. CONDUIT MOUNT

CDM0 Not required	CDM1 Required ¹
--------------------------	-----------------------------------

¹ Consult factory.

O. SUSPENSION (STEM MOUNT)

SL00 Not required	SL03 3ft
--------------------------	-----------------

Stems will always be Black Matallic Textured finished. Custom lengths available, consult factory for details.

CYLINDER EX™

P. FIXTURE FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA27 Wood grain - Light Cherry ¹
FA28 Wood grain - Dark Walnut ¹	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	

¹ Longer than normal lead times may apply consult factory.

Q. BEZEL FINISH

FB01 White	FB02 Black Metallic - Textured	FB20 Silver Metallic - Textured	FB46 Charcoal Metallic - Textured
FB47 Bronze Metallic - Textured			

Shatterproof lens available, consult factory.


R. CANOPY & STEM FINISH

FC00 Not required	FC01 White	FC02 Black Metallic - Textured	FC20 Silver Metallic - Textured
FC46 Charcoal Metallic - Textured	FC47 Bronze Metallic - Textured		


CYLINDER EX™

DIMENSIONAL DIAGRAMS


6"- Ceiling Surface Mount Direct Only

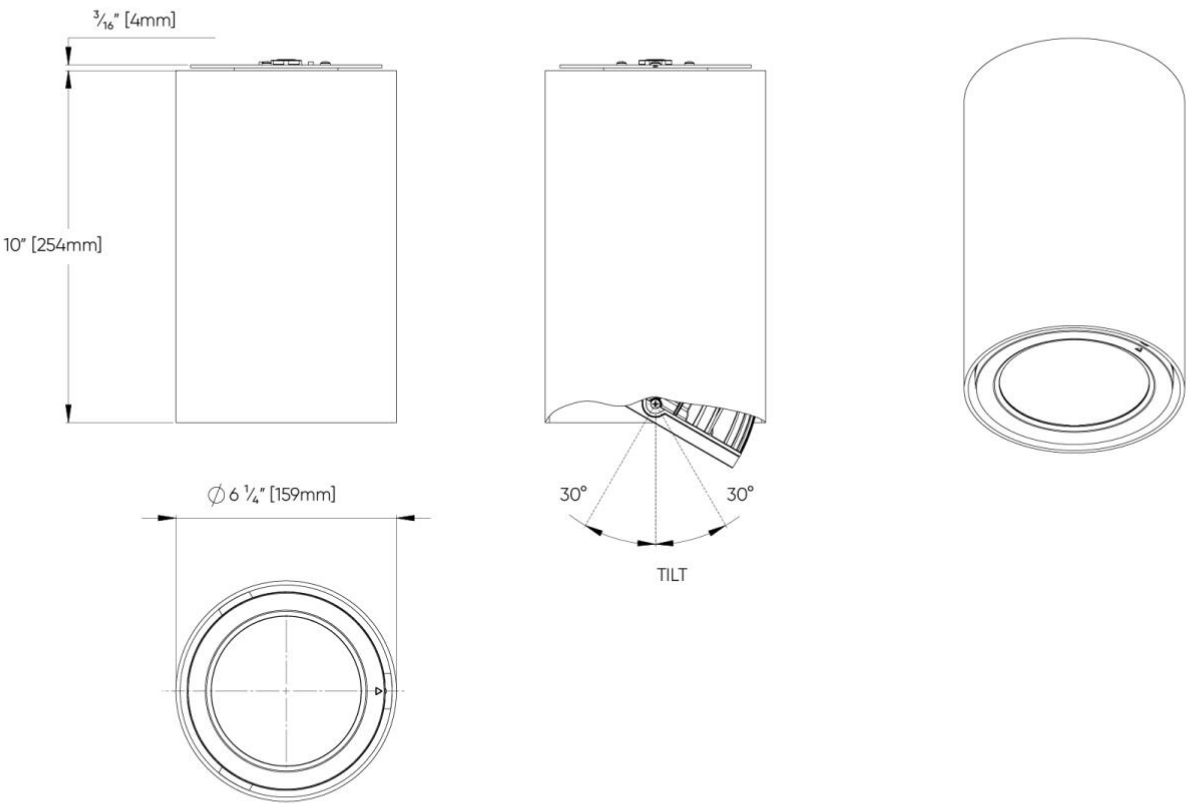


6"- Full Size Classic Wall Mount Direct-Indirect Only

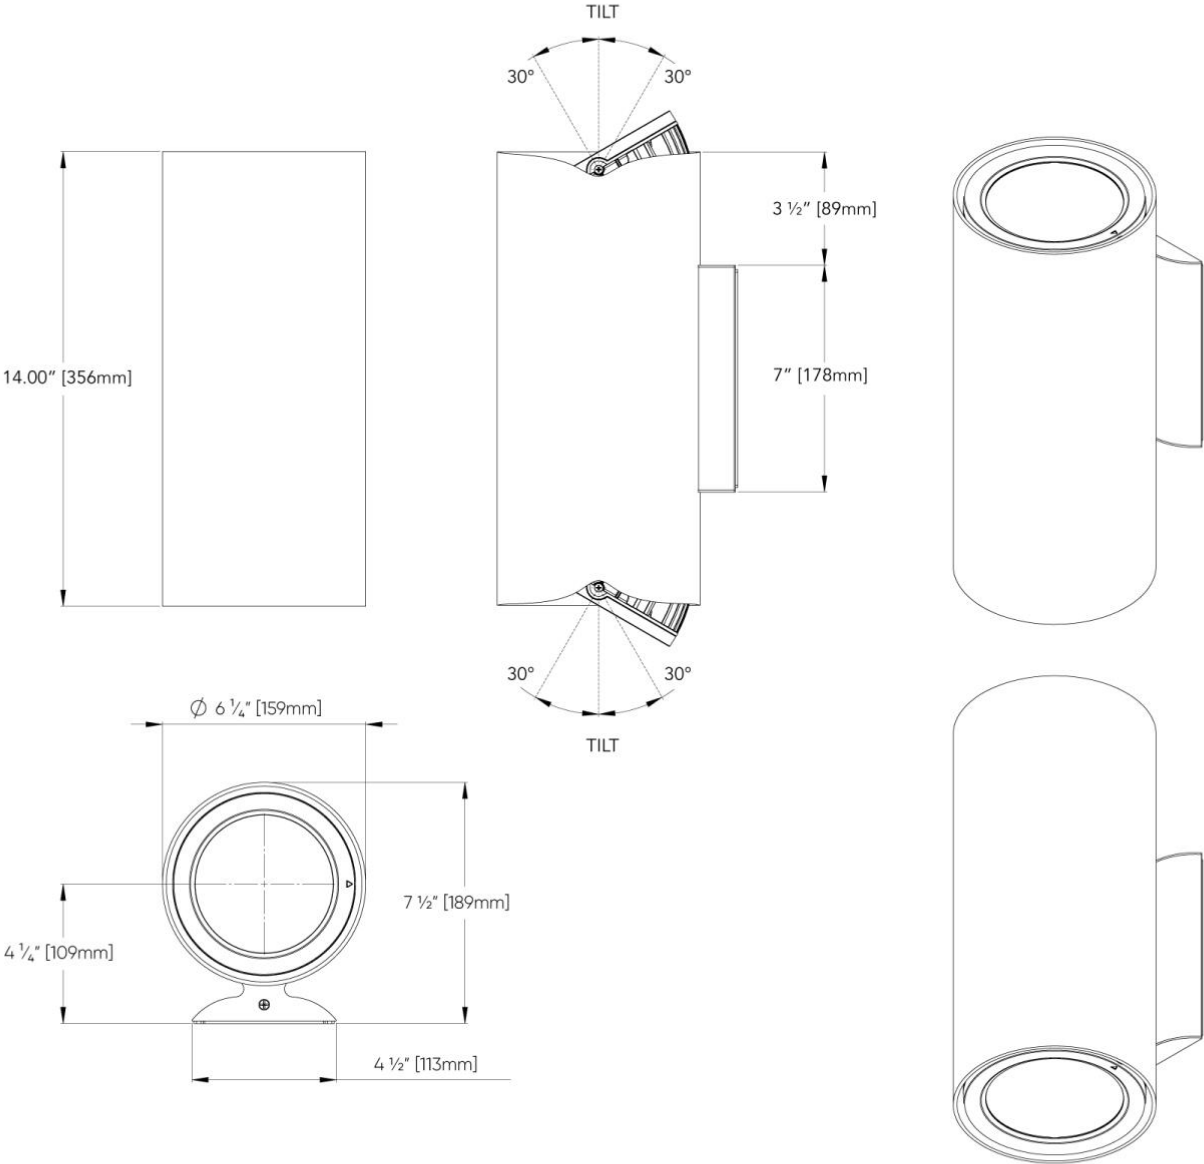

6" - Full Size Short Narrow Wall Mount Direct-Indirect Only

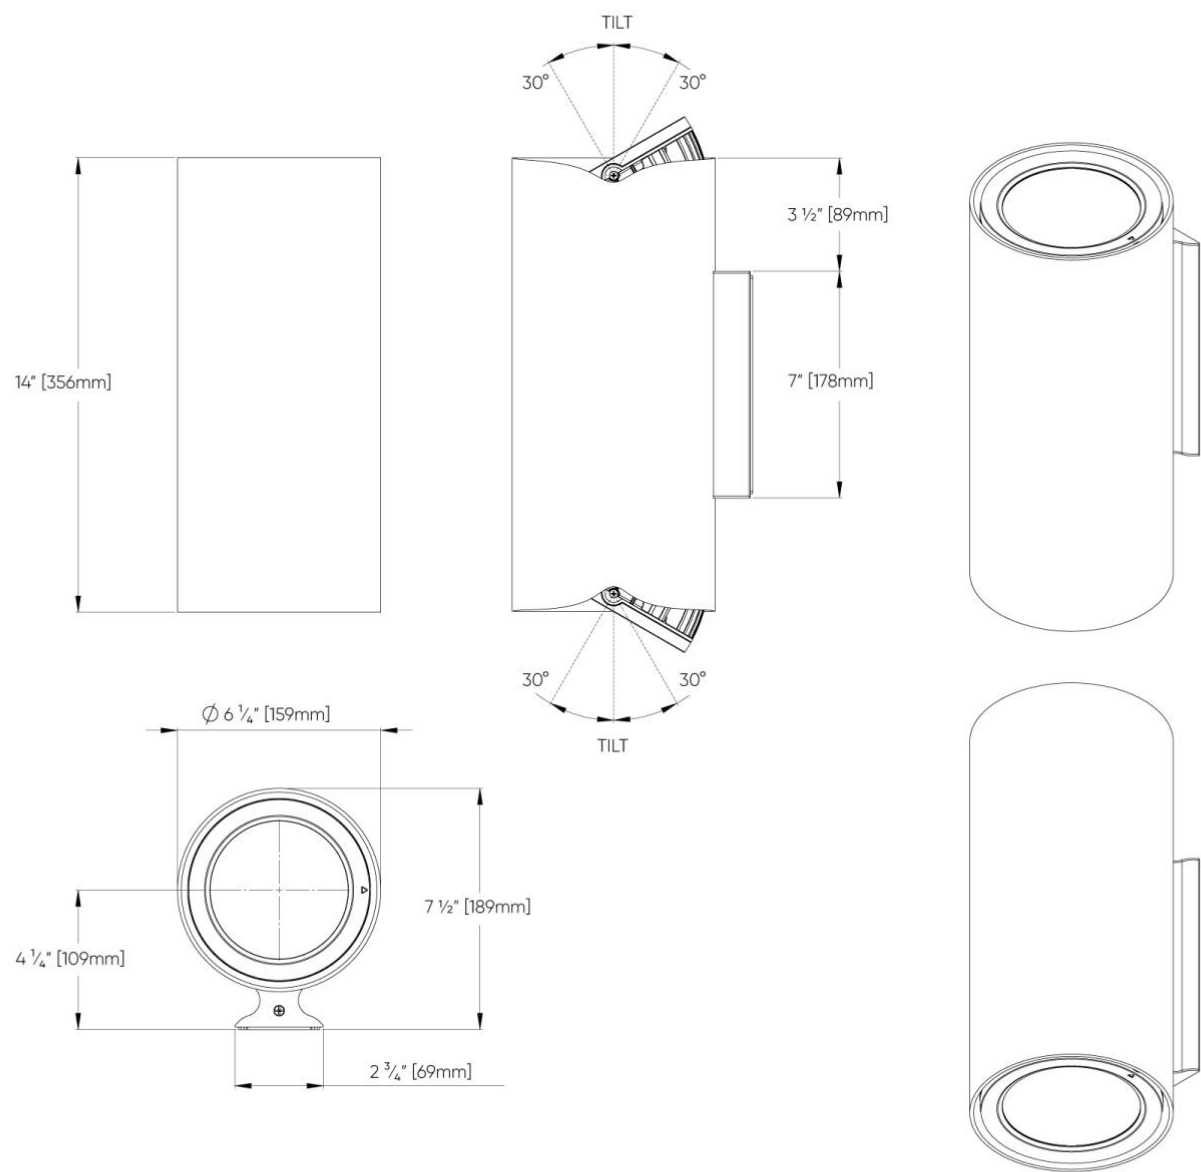


6" - Full Size Tall Narrow Wall Mount Direct-Indirect

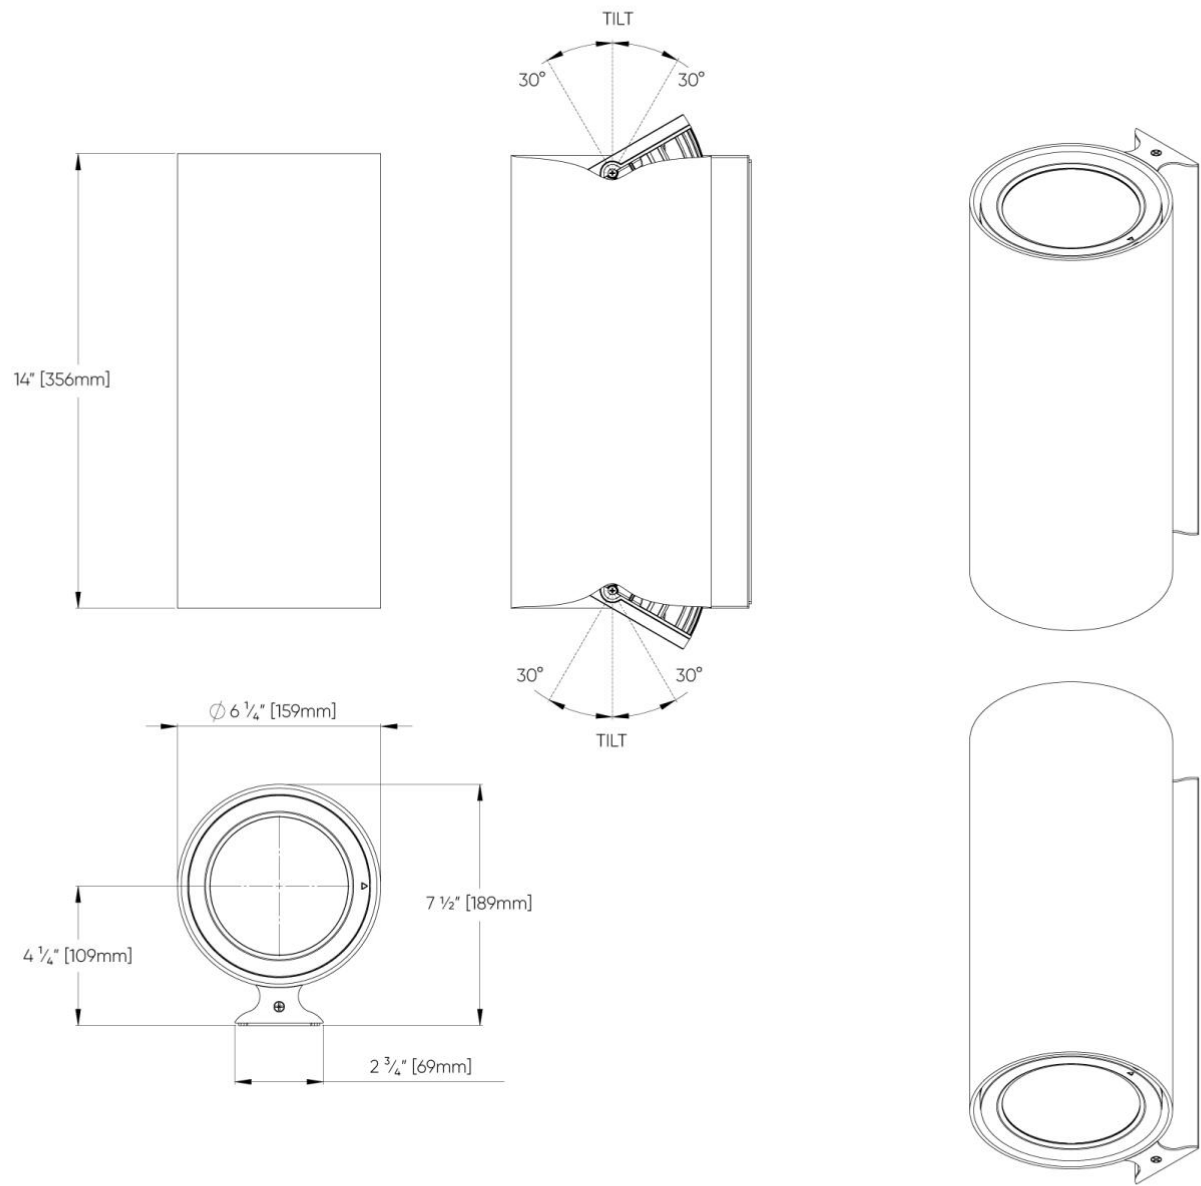


CYLINDER EX™


6" - Classic Wall Mount Direct or Indirect only

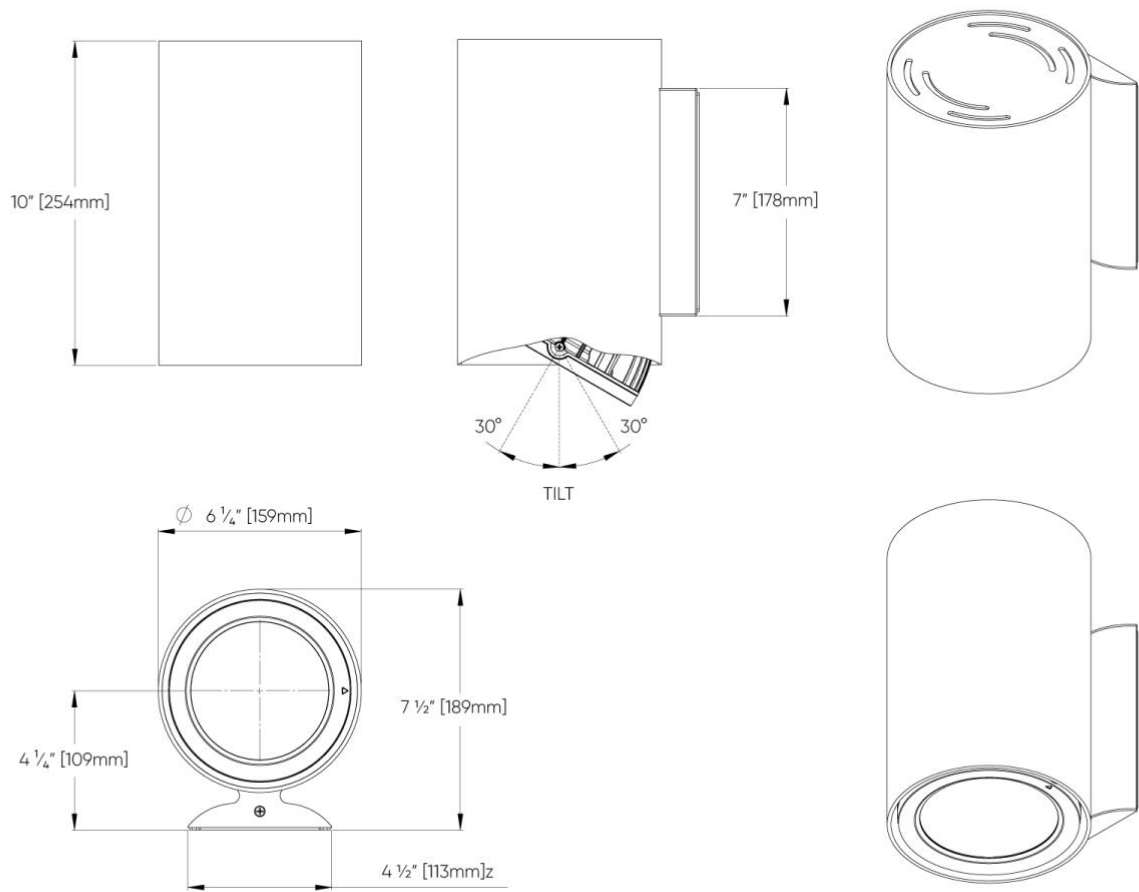

6"- Narrow Wall Mount Direct/Indirect Only

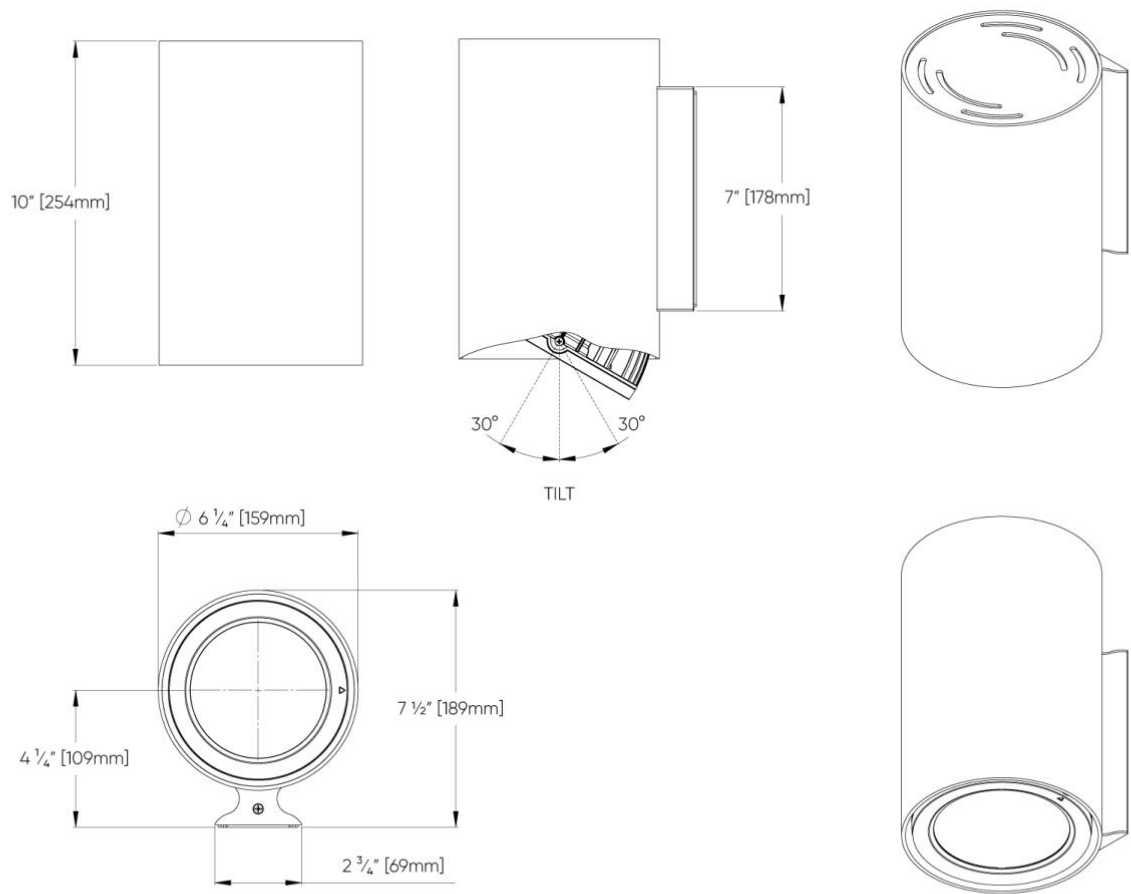

6" - Half Size Narrow full Wall Mount Direct Only

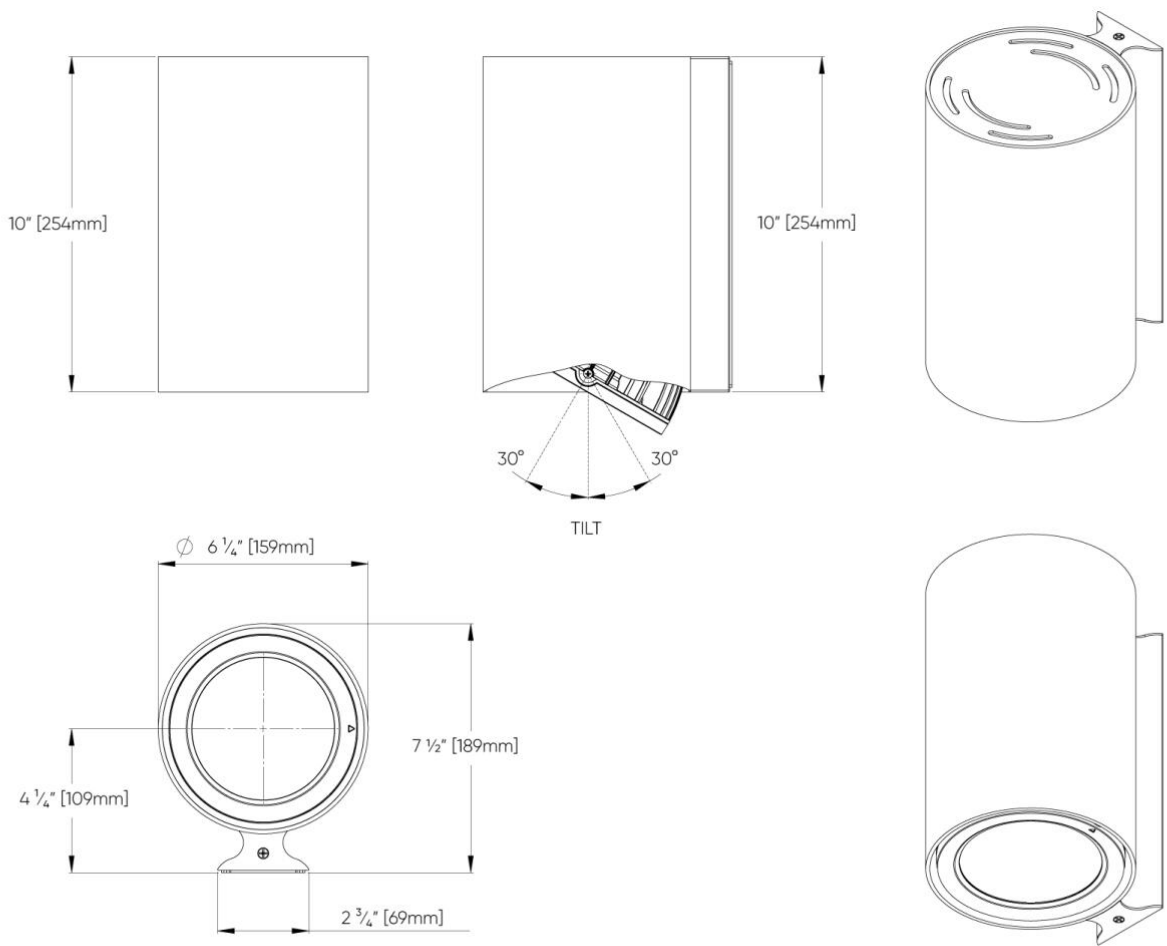

6" - Pendant Rigid Stem Mount Direct Only (ST01)

