

# CYLINDER EX™



Project Name:	Fixture Type:
Fixture Code:	Quantities:

## A. LUMINAIRE

CYXW Wall	CYXC Ceiling	CYXP Pendant <sup>1</sup>
-----------	--------------	---------------------------

Conduit mount is an option for wall and ceiling versions, consult factory.  
<sup>1</sup> Pendant is stem mount only.

## B. DIAMETER

DR06 6"

## C. DIRECTION

DT1 Direct 10" housing <sup>1 2</sup>	DT2 Direct/Indirect 14" housing <sup>3</sup>
---------------------------------------	--

<sup>1</sup> Available for wall, ceiling, and pendant.  
<sup>2</sup> Wall mount direct only can be installed pointing up or down.  
<sup>3</sup> Available for wall mount only.  
Direct will have a 10" tall housing  
Direct/Indirect will have a 14" tall housing

## D. LIGHT SOURCE

DN01 LEDs / Multi-Array Optics	DN02 COB / Reflector
--------------------------------	----------------------

All data based on max output and nominal values.

## E. CRI

CR00 Not required (For Amber Light)	CR80 CRI 80+
-------------------------------------	--------------

## F. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
CTA62 Amber (Turtle Friendly) <sup>1</sup>			

<sup>1</sup> Available for LED Direct only with 50° direct distribution.

## G. DISTRIBUTION DIRECT

BAT2 Type II <sup>1</sup>	BAT3 Type III <sup>1</sup>	BA03 3° <sup>2</sup>	BA15 15° <sup>4</sup>
BA30 30° <sup>4</sup>	BA50 50° <sup>4</sup>	BA70 70° <sup>3</sup>	

<sup>1</sup> Available for Direct, and LEDs / Multi-Array Optics distribution, not recommended for Indirect use. Available with Direct lumens of 2000 and 3000, not 4000.  
<sup>2</sup> Available for LEDs / Multi-Array Optics distribution and Wall mount. There may be a +/- 250K variance in color temperature. The head is not adjustable.  
<sup>3</sup> Available for LEDs / Multi-Array Optics distribution.  
<sup>4</sup> Available for LEDs / Multi-Array Optics distribution and COB / Reflector.

# CYLINDER EX™

## H. DISTRIBUTION INDIRECT

<b>BB00</b> Not required	<b>BB03</b> 3° <sup>1</sup>	<b>BB15</b> 15° <sup>2</sup>	<b>BB30</b> 30° <sup>2</sup>
<b>BB50</b> 50° <sup>3</sup>	<b>BB70</b> 70° <sup>2</sup>		

<sup>1</sup> Available for LEDs, Indirect and Wall version only. There may be a +/- 250K variance in color temperature. The head is not adjustable.

<sup>2</sup> Available for LEDs / Multi-Array Optics distribution.

<sup>3</sup> Available for LEDs / Multi-Array Optics distribution and COB / Reflector.

## I. LUMENS DIRECT

<b>LMA0005</b> 59 lms <sup>1</sup>	<b>LMA0040</b> 400 lms <sup>2</sup>	<b>LMA0200</b> 2000 lms	<b>LMA0300</b> 3000 lms
<b>LMA0400</b> 4000 lms <sup>3</sup>			

<sup>1</sup> Available for 3° Direct distribution.

<sup>2</sup> Available for Amber (Turtle Friendly) light.

<sup>3</sup> Available for Direct only, 15°, 30°, 50°, and 70°.

## J. LUMENS INDIRECT

<b>LMB0000</b> Not required	<b>LMB0005</b> 59 lms <sup>1</sup>	<b>LMB0200</b> 2000 lms	<b>LMB0300</b> 3000 lms
-----------------------------	------------------------------------	-------------------------	-------------------------

<sup>1</sup> Available for 3° Indirect distribution.

## K. VOLTAGE

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>
--------------------	-----------------------------

<sup>1</sup> Not available in North America

## L. DIMMING

<b>DA01</b> 0-10V Dimming 1.0%	<b>DA11</b> 0-10V Dimming 1.0% - Arctic driver <sup>1 3</sup>	<b>DA12</b> 0-10V Dimming 1.0% - Desert driver <sup>2 3</sup>	<b>DA21</b> DALI Dimming 1.0% <sup>3</sup>
--------------------------------	---	---	--

<sup>1</sup> Capable of operating at -30°C (-22°F) to ambient temperature

<sup>2</sup> Capable of operating at +50°C (+122°F) ambient temperature

<sup>3</sup> Consult factory

## M. MOUNTING BRACKET

<b>MB0</b> Not required	<b>MB1</b> Narrow - Full <sup>1 2</sup>	<b>MB2</b> Narrow - Standard <sup>2</sup>	<b>MB3</b> Classic - Standard <sup>3</sup>
-------------------------	---	---	--

\* Mounting bracket finish to match fixture finish.

<sup>1</sup> Only available with Direct/Indirect

<sup>2</sup> The Wall Narrow versions mount to a 2"x4" switch box (supplied by others).

<sup>3</sup> The Wall Classic version mount to a 4"x4" junction box (supplied by others).

## N. CONDUIT MOUNT

<b>CDM0</b> Not required	<b>CDM1</b> Required <sup>1</sup>
--------------------------	-----------------------------------

<sup>1</sup> Consult factory.

## O. SUSPENSION (STEM MOUNT)

<b>SL00</b> Not required	<b>SL03</b> 3ft
--------------------------	-----------------

Stems will always be Black Matallic Textured finished. Custom lengths available, consult factory for details.

# CYLINDER EX™

## P. FIXTURE FINISH

<b>FA01</b> White	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic - Textured	<b>FA27</b> Wood grain - Light Cherry <sup>1</sup>
<b>FA28</b> Wood grain - Dark Walnut <sup>1</sup>	<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured	

<sup>1</sup> Longer than normal lead times may apply consult factory.

## Q. BEZEL FINISH

<b>FB01</b> White	<b>FB02</b> Black Metallic - Textured	<b>FB20</b> Silver Metallic - Textured	<b>FB46</b> Charcoal Metallic - Textured
<b>FB47</b> Bronze Metallic - Textured			


Shatterproof lens available, consult factory.

## R. CANOPY & STEM FINISH


<b>FC00</b> Not required	<b>FC01</b> White	<b>FC02</b> Black Metallic - Textured	<b>FC20</b> Silver Metallic - Textured
<b>FC46</b> Charcoal Metallic - Textured	<b>FC47</b> Bronze Metallic - Textured		

DIMENSIONAL DIAGRAMS


6"- Ceiling Surface Mount Direct Only

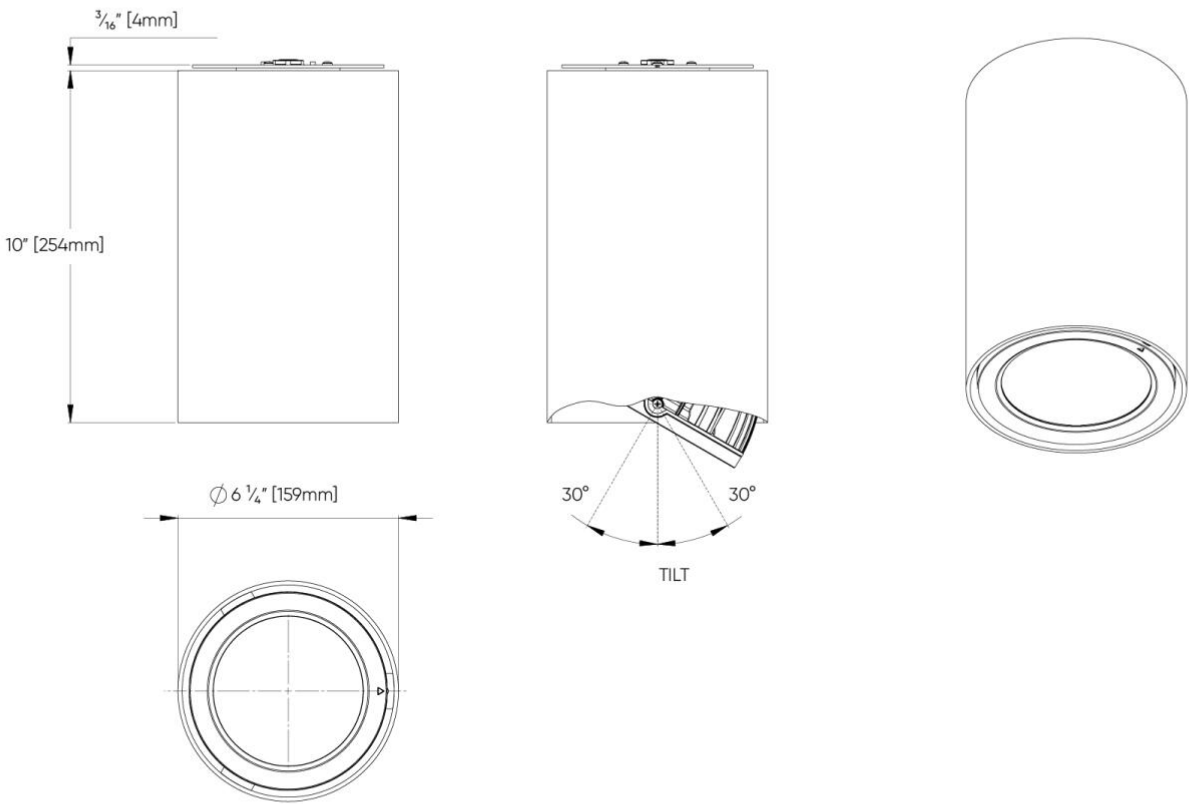


6"- Full Size Classic Wall Mount Direct-Indirect Only

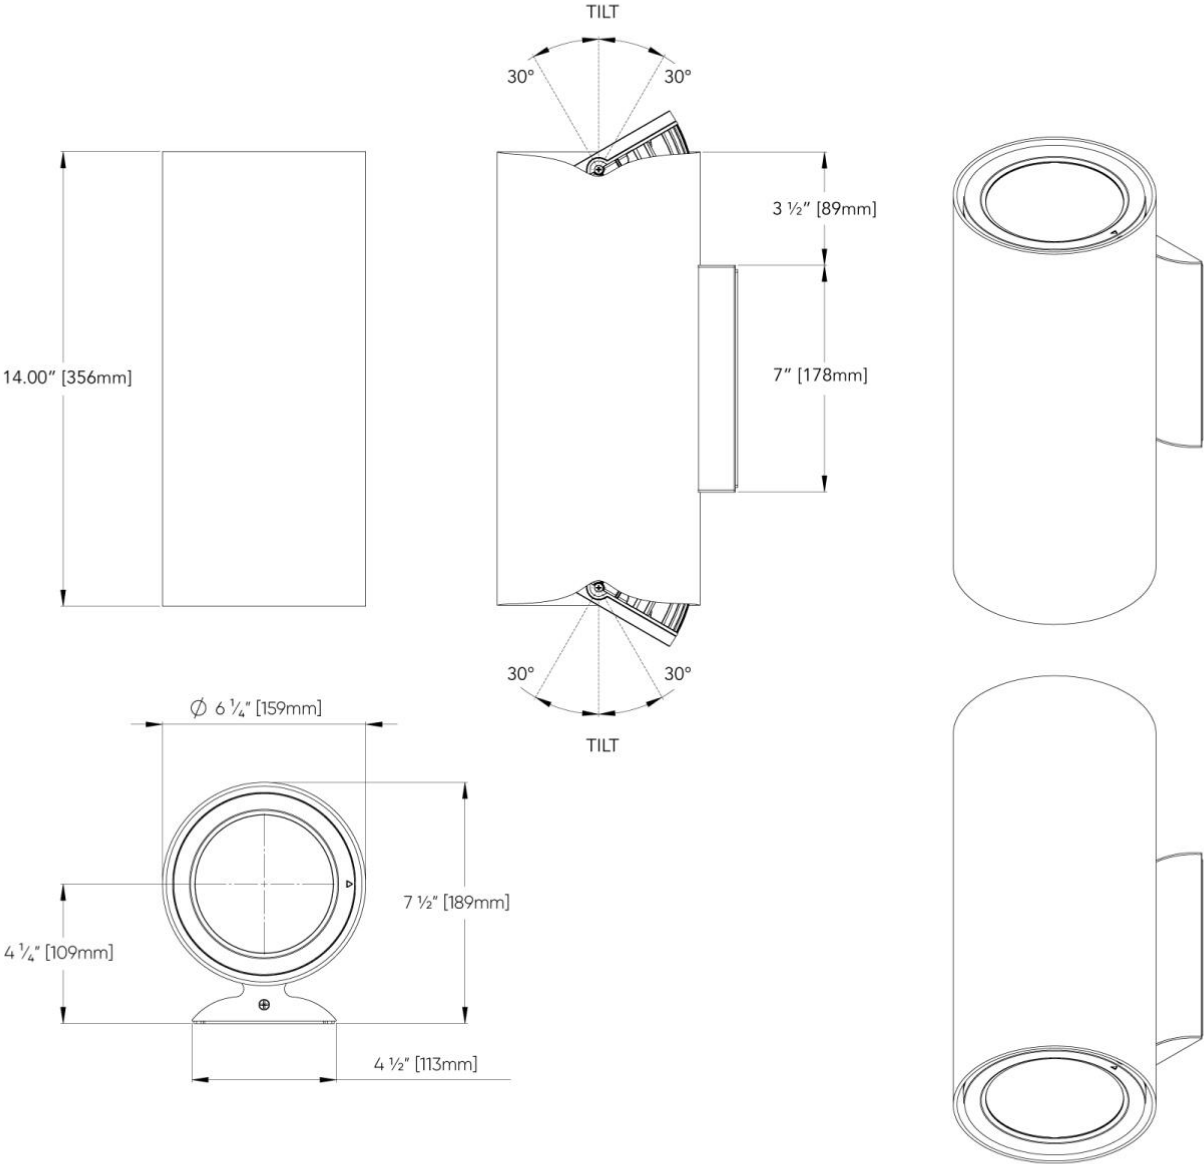

6" - Full Size Short Narrow Wall Mount Direct-Indirect Only

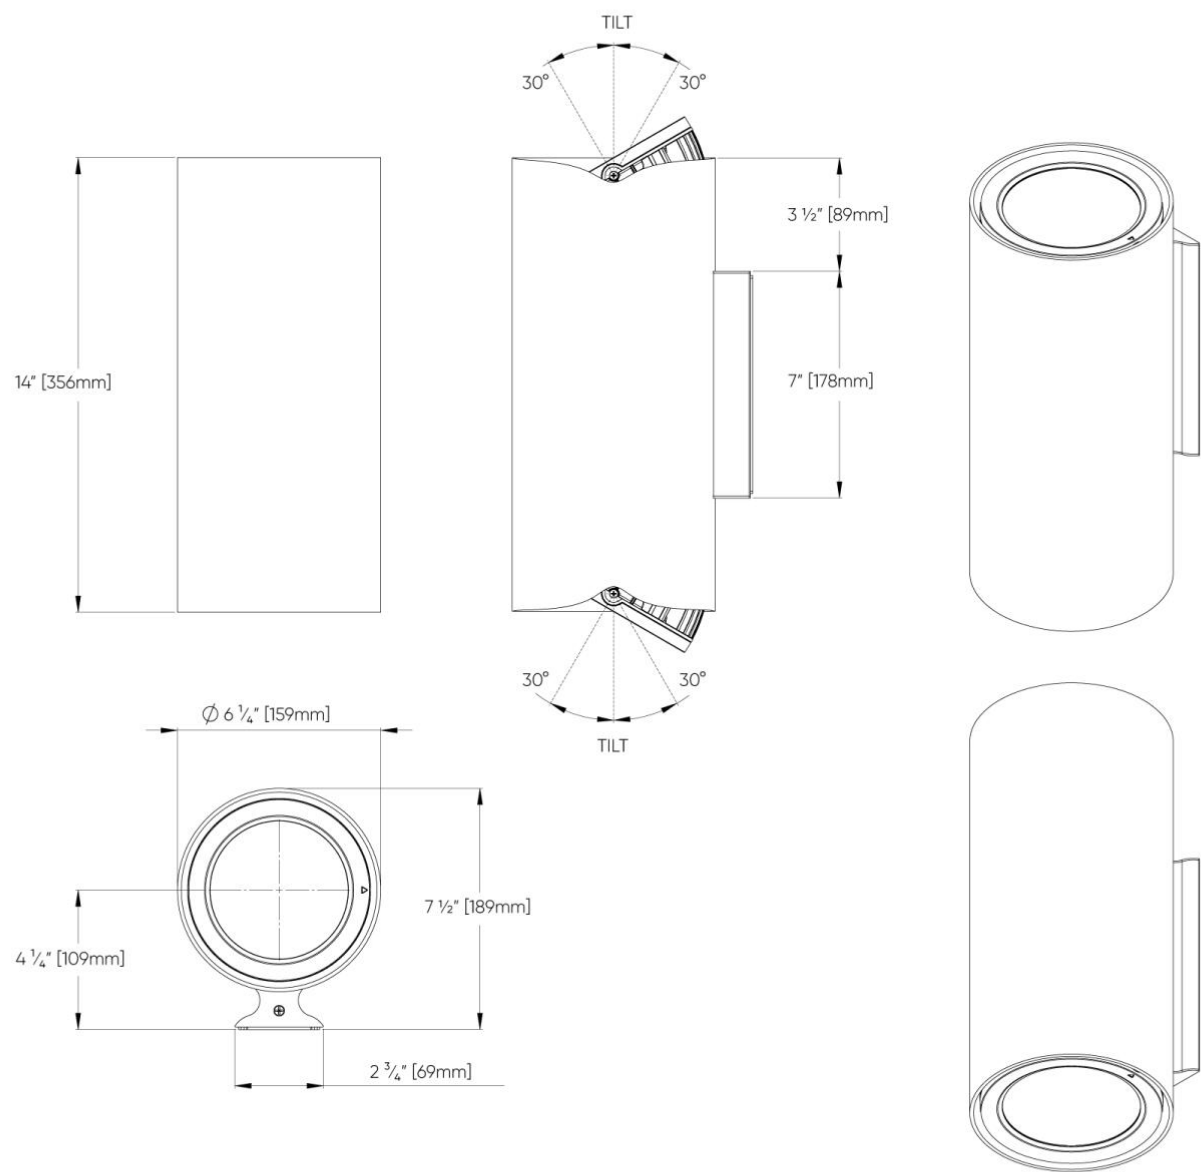


6"- Full Size Tall Narrow Wall Mount Direct-Indirect

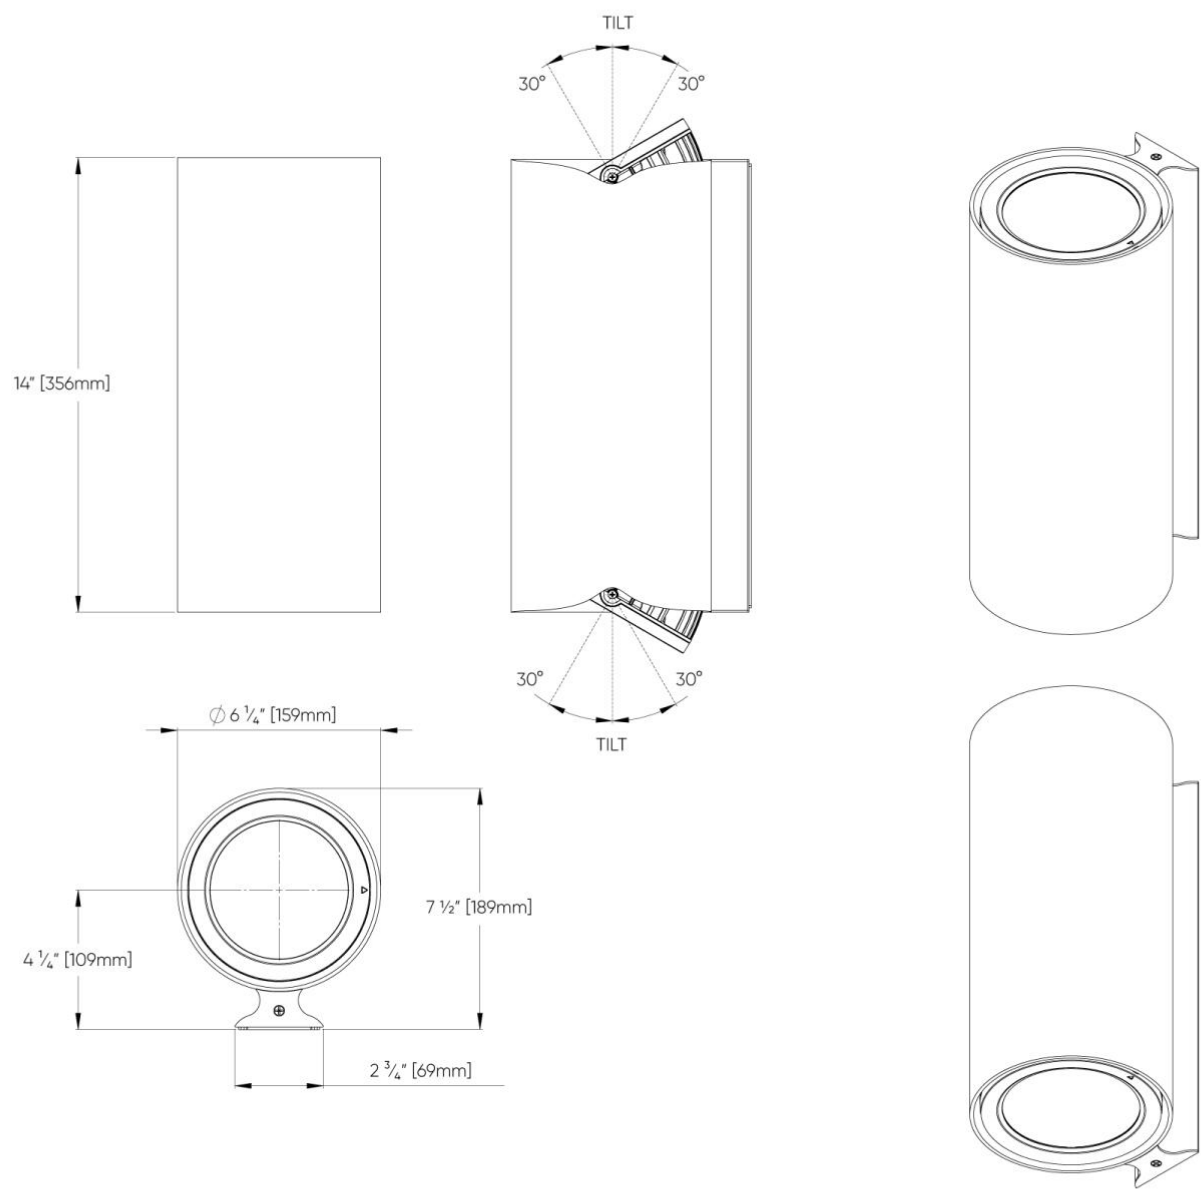


CYLINDER EX™

6" - Classic Wall Mount Direct or Indirect only

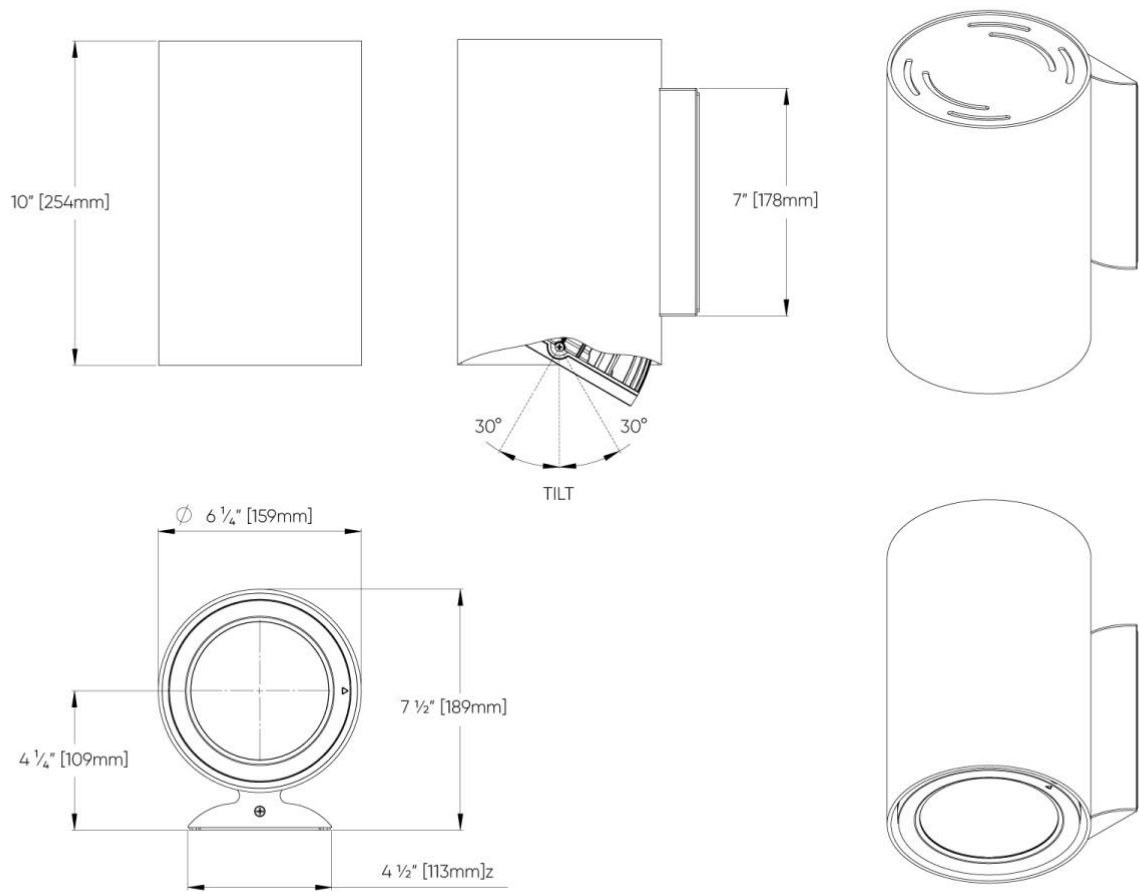




6"- Narrow Wall Mount Direct/Indirect Only

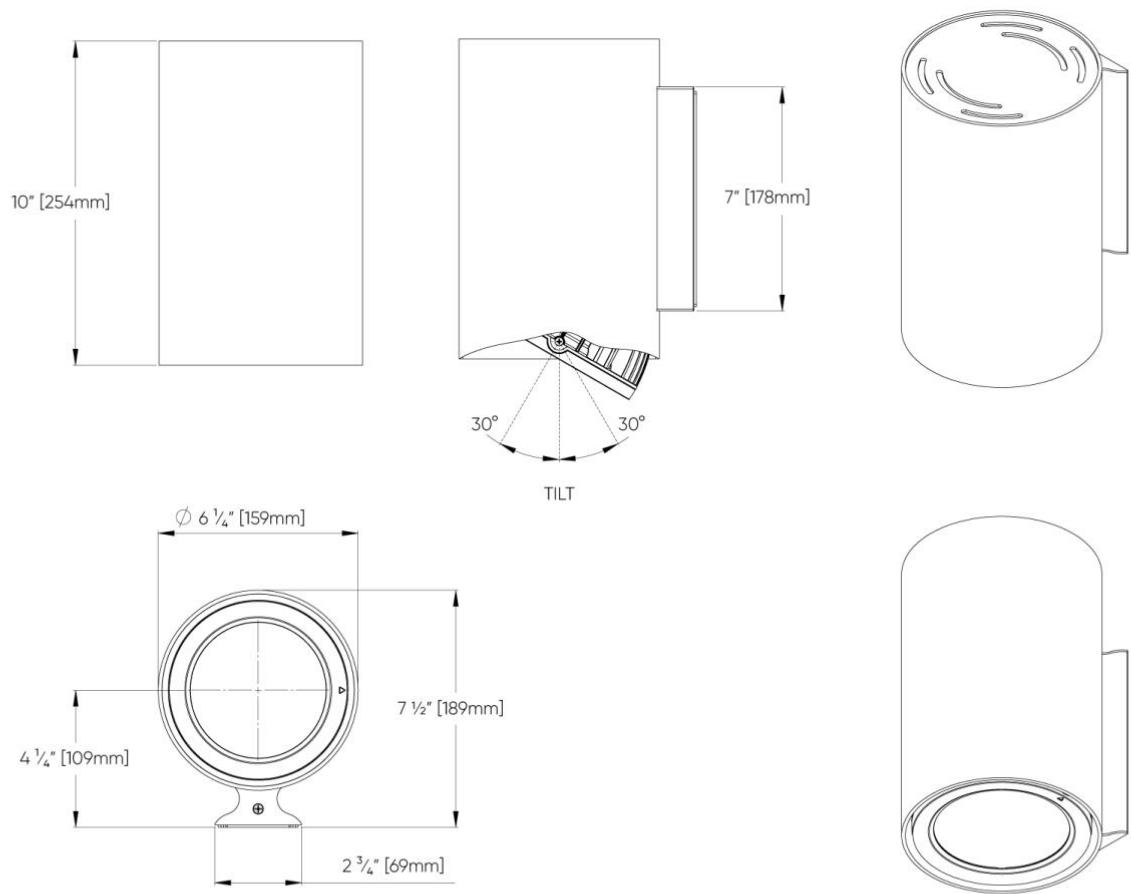

6" - Half Size Narrow full Wall Mount Direct Only

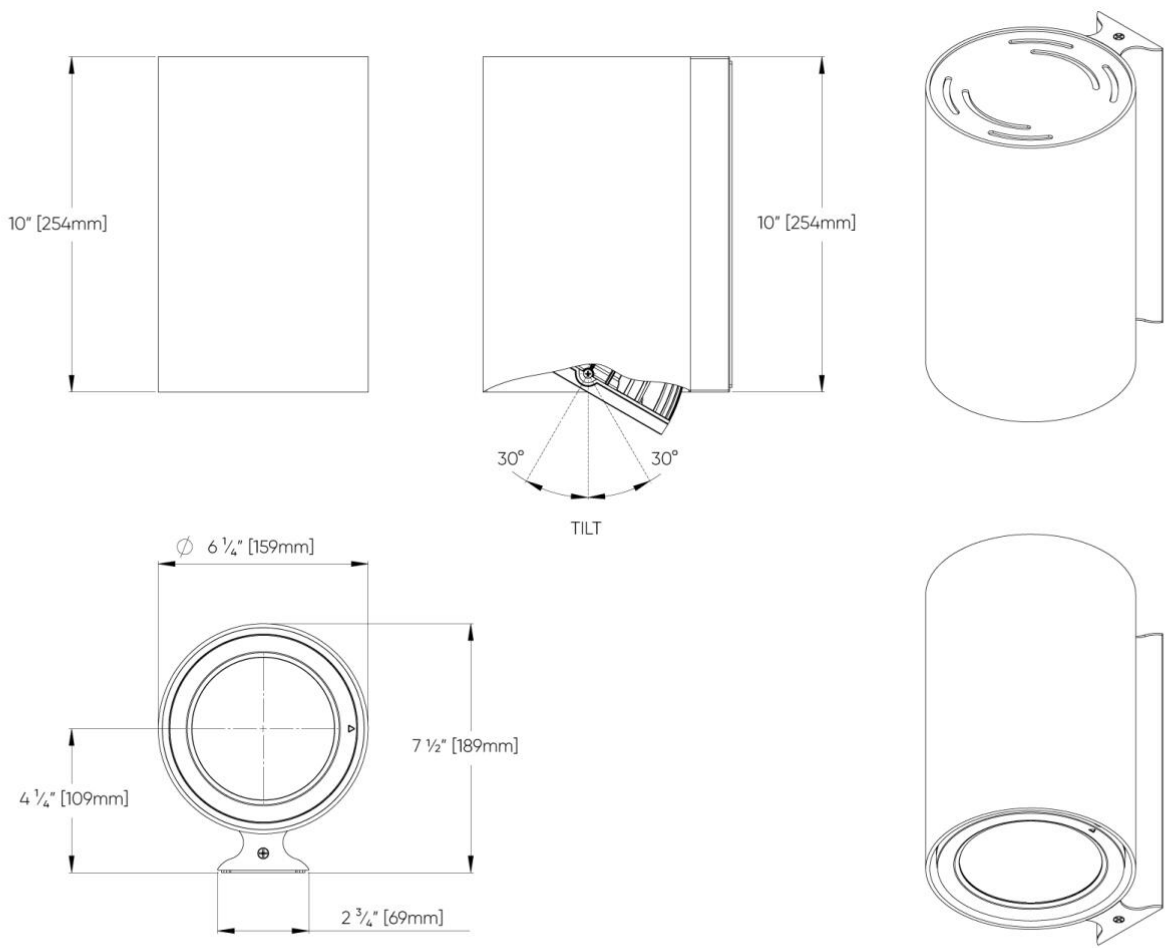

6" - Pendant Rigid Stem Mount Direct Only (ST01)

