

# CYLINDER EX™



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

**CYXW** Wall

**CYXC** Ceiling

**CYXP** Pendant <sup>1</sup>

Conduit mount is an option for wall and ceiling versions, consult factory.

<sup>1</sup> Pendant is stem mount only.

## B. DIAMETER

**DR06** 6"

## C. DIRECTION

**DT1** Direct 10" housing <sup>1 2</sup>

**DT2** Direct/Indirect 14" housing <sup>3</sup>

<sup>1</sup> Available for wall, ceiling, and pendant.

<sup>2</sup> Wall mount direct only can be installed as indirect only.

<sup>3</sup> Available for wall mount only.

Direct will have a 10" tall housing

Direct/Indirect will have a 14" tall housing

## D. LIGHT SOURCE

**DN01** LEDs / Multi-Array Optics

**DN02** COB / Reflector

All data based on max output and nominal values.

## E. CRI

**CR00** Not required (For Amber Light)

**CR80** CRI 80+

## F. CCT

**CTA27** 2700K <sup>1</sup>

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

**CTA62** Amber (Turtle Friendly) <sup>2</sup>

<sup>1</sup> Longer than normal lead times may apply, consult factory.

<sup>2</sup> Available for LED Direct only with 50° direct distribution.

## G. DISTRIBUTION DIRECT

**BAT2** Type II <sup>1</sup>

**BAT3** Type III <sup>1</sup>

**BA03** 3° <sup>2</sup>

**BA15** 15° <sup>3</sup>

**BA30** 30° <sup>3</sup>

**BA50** 50° <sup>4</sup>

**BA70** 70° <sup>3</sup>

<sup>1</sup> Available for Wall mount, Direct, and LEDs / Multi-Array Optics distribution, not recommended for Indirect use. Available with Direct lumens of 2000 and 3000, not 4000.

<sup>2</sup> Available for LEDs / Multi-Array Optics distribution and Wall mount. There may be a +/- 250K variance in color temperature. The head is not adjustable.

<sup>3</sup> Available for LEDs / Multi-Array Optics distribution.

<sup>4</sup> Available for LEDs / Multi-Array Optics distribution and COB / Reflector.



# CYLINDER EX™

## H. DISTRIBUTION INDIRECT

<b>BB00</b> Not required	<b>BB03</b> 3° <sup>1</sup>	<b>BB15</b> 15° <sup>2</sup>	<b>BB30</b> 30° <sup>2</sup>
<b>BB50</b> 50° <sup>3</sup>	<b>BB70</b> 70° <sup>2</sup>		

<sup>1</sup> Available for LEDs, Indirect and Wall version only. There may be a +/- 250K variance in color temperature. The head is not adjustable.

<sup>2</sup> Available for LEDs / Multi-Array Optics distribution.

<sup>3</sup> Available for LEDs / Multi-Array Optics distribution and COB / Reflector.

## I. LUMENS DIRECT

<b>LMA0005</b> 59 lms <sup>1</sup>	<b>LMA0040</b> 400 lms <sup>2</sup>	<b>LMA0200</b> 2000 lms	<b>LMA0300</b> 3000 lms
<b>LMA0400</b> 4000 lms <sup>3</sup>			

<sup>1</sup> Available for 3° Direct distribution.

<sup>2</sup> Available for Amber (Turtle Friendly) light.

<sup>3</sup> Available for Direct only, 15°, 30°, 50°, and 70°.

## J. LUMENS INDIRECT

<b>LMB0000</b> Not required	<b>LMB0005</b> 59 lms <sup>1</sup>	<b>LMB0200</b> 2000 lms	<b>LMB0300</b> 3000 lms
-----------------------------	------------------------------------	-------------------------	-------------------------

<sup>1</sup> Available for 3° Indirect distribution.

## K. VOLTAGE

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>
--------------------	-----------------------------

<sup>1</sup> Not available in North America

## L. DIMMING

<b>DA01</b> 0-10V Dimming 1.0%	<b>DA11</b> 0-10V Dimming 1.0% - Arctic <sup>1 3</sup>	<b>DA12</b> 0-10V Dimming 1.0% - Desert <sup>2 3</sup>	<b>DA21</b> DALI Dimming 1.0% <sup>3</sup>
--------------------------------	--	--	--

<sup>1</sup> Capable of operating at -30°C (-22°F) to ambient temperature

<sup>2</sup> Capable of operating at +50°C (+122°F) ambient temperature

<sup>3</sup> Consult factory

## M. MOUNTING BRACKET

<b>MB0</b> Not required	<b>MB1</b> Narrow - Full <sup>1 2</sup>	<b>MB2</b> Narrow - Standard <sup>2</sup>	<b>MB3</b> Classic - Standard <sup>3</sup>
-------------------------	---	---	--

\* Mounting bracket finish to match fixture finish.

<sup>1</sup> Only available with Direct/Indirect

<sup>2</sup> The Wall Narrow versions mount to a 2"x4" switch box (supplied by others).

<sup>3</sup> The Wall Classic version mount to a 4"x4" junction box (supplied by others).

## N. SUSPENSION (STEM MOUNT)

<b>SL00</b> Not required	<b>SL03</b> 3ft
--------------------------	-----------------

Stems will always be Black Metallic Textured finished. Custom lengths available, consult factory for details.

## O. FIXTURE FINISH

<b>FA01</b> White	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic - Textured	<b>FA27</b> Wood grain - Light Cherry <sup>1</sup>
<b>FA28</b> Wood grain - Dark Walnut <sup>1</sup>	<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured	

<sup>1</sup> Longer than normal lead times may apply consult factory.



# CYLINDER EX™

## P. BEZEL FINISH

**FB01** White

**FB02** Black Metallic - Textured

**FB20** Silver Metallic - Textured

**FB46** Charcoal Metallic - Textured

**FB47** Bronze Metallic - Textured

---

Shatterproof lens available, consult factory.

## Q. CANOPY & STEM FINISH

**FC00** Not required

**FC01** White

**FC02** Black Metallic - Textured

**FC20** Silver Metallic - Textured


**FC46** Charcoal Metallic - Textured

**FC47** Bronze Metallic - Textured

# CYLINDER EX™


## DIMENSIONAL DIAGRAMS

### 6"- Ceiling Surface Mount Direct Only

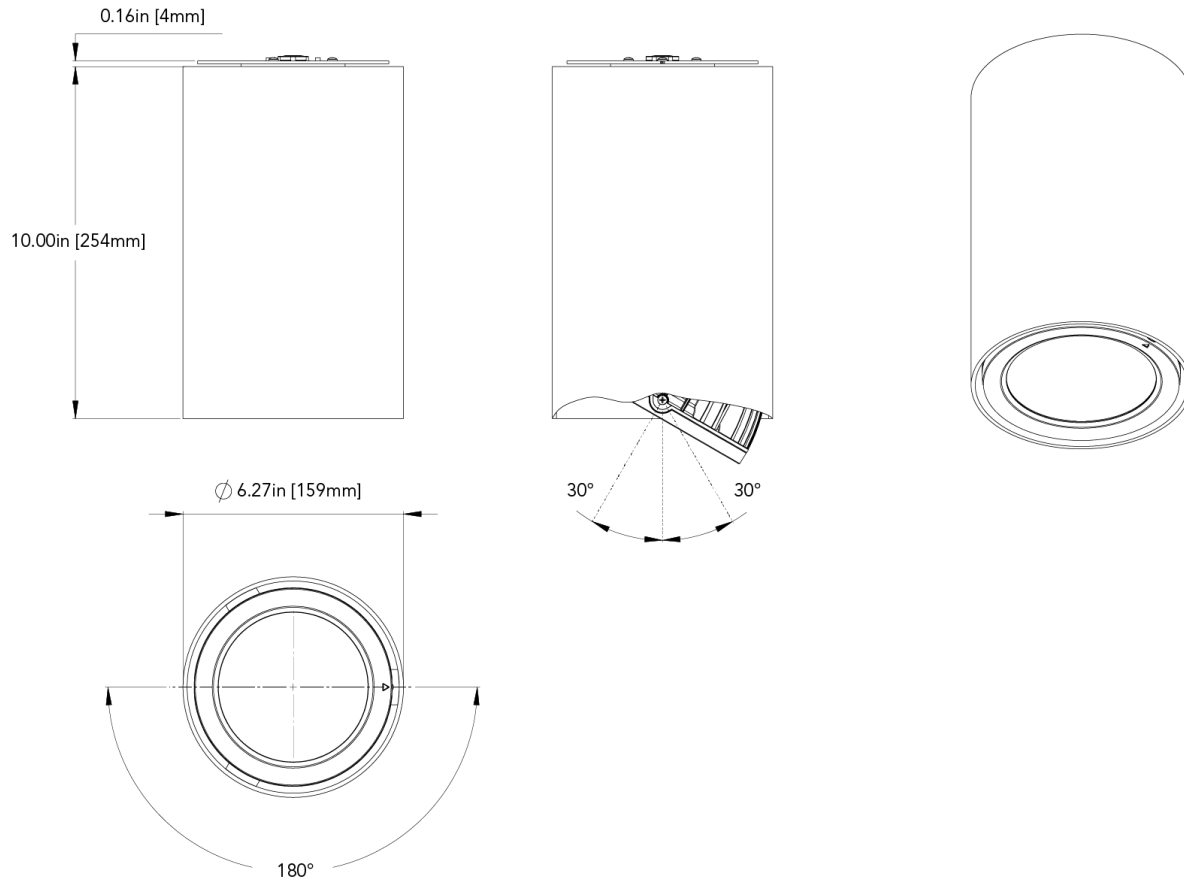


# CYLINDER EX™

## 6"- Full Size Classic Wall Mount Direct-Indirect Only

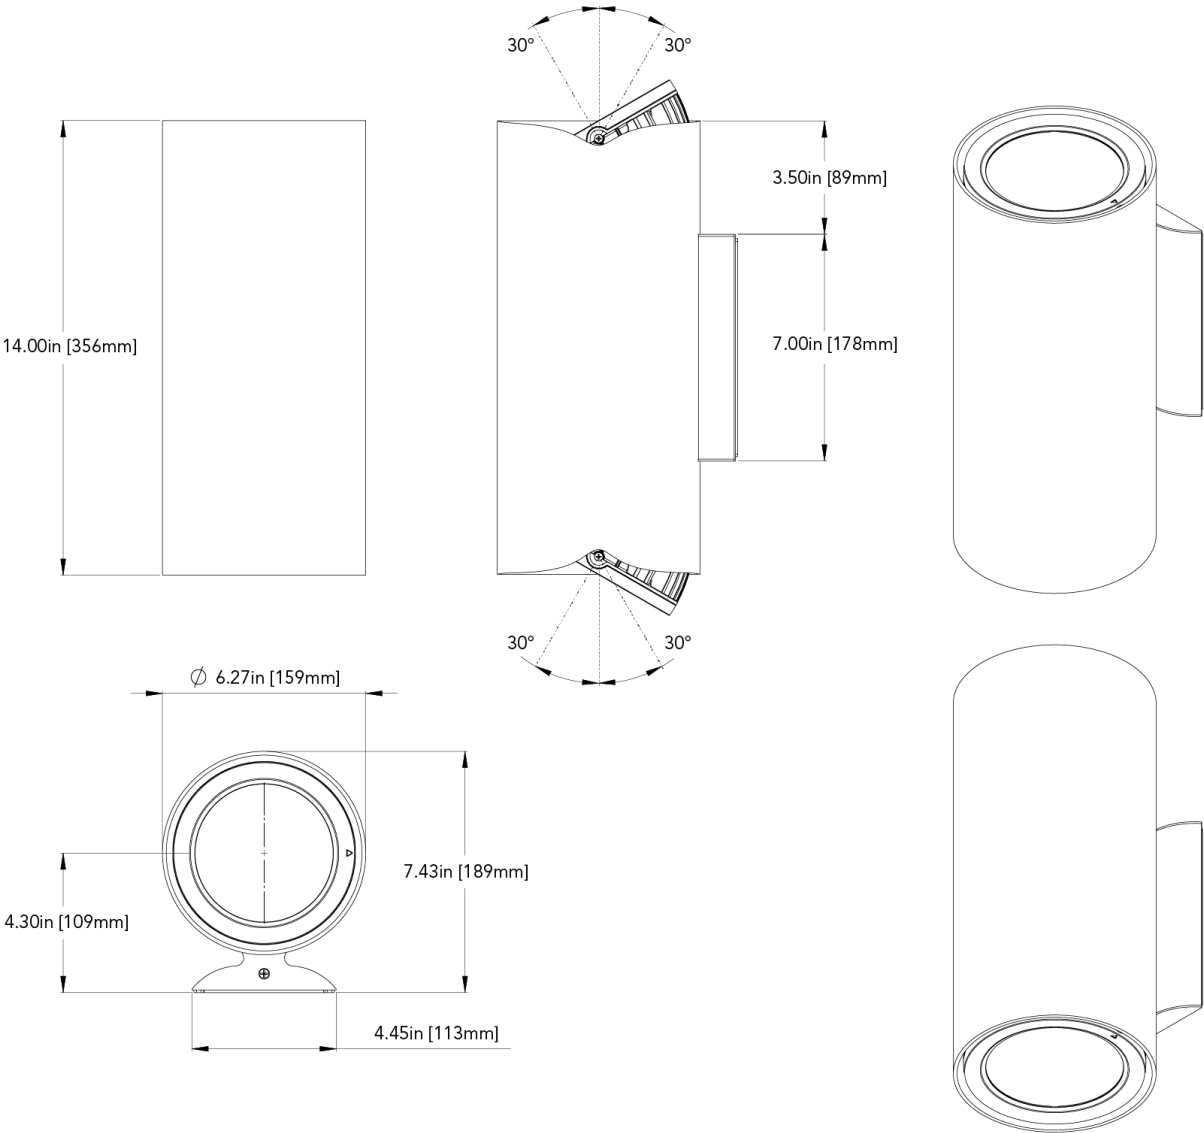


# CYLINDER EX™

## 6"- Full Size Short Narrow Wall Mount Direct-Indirect Only

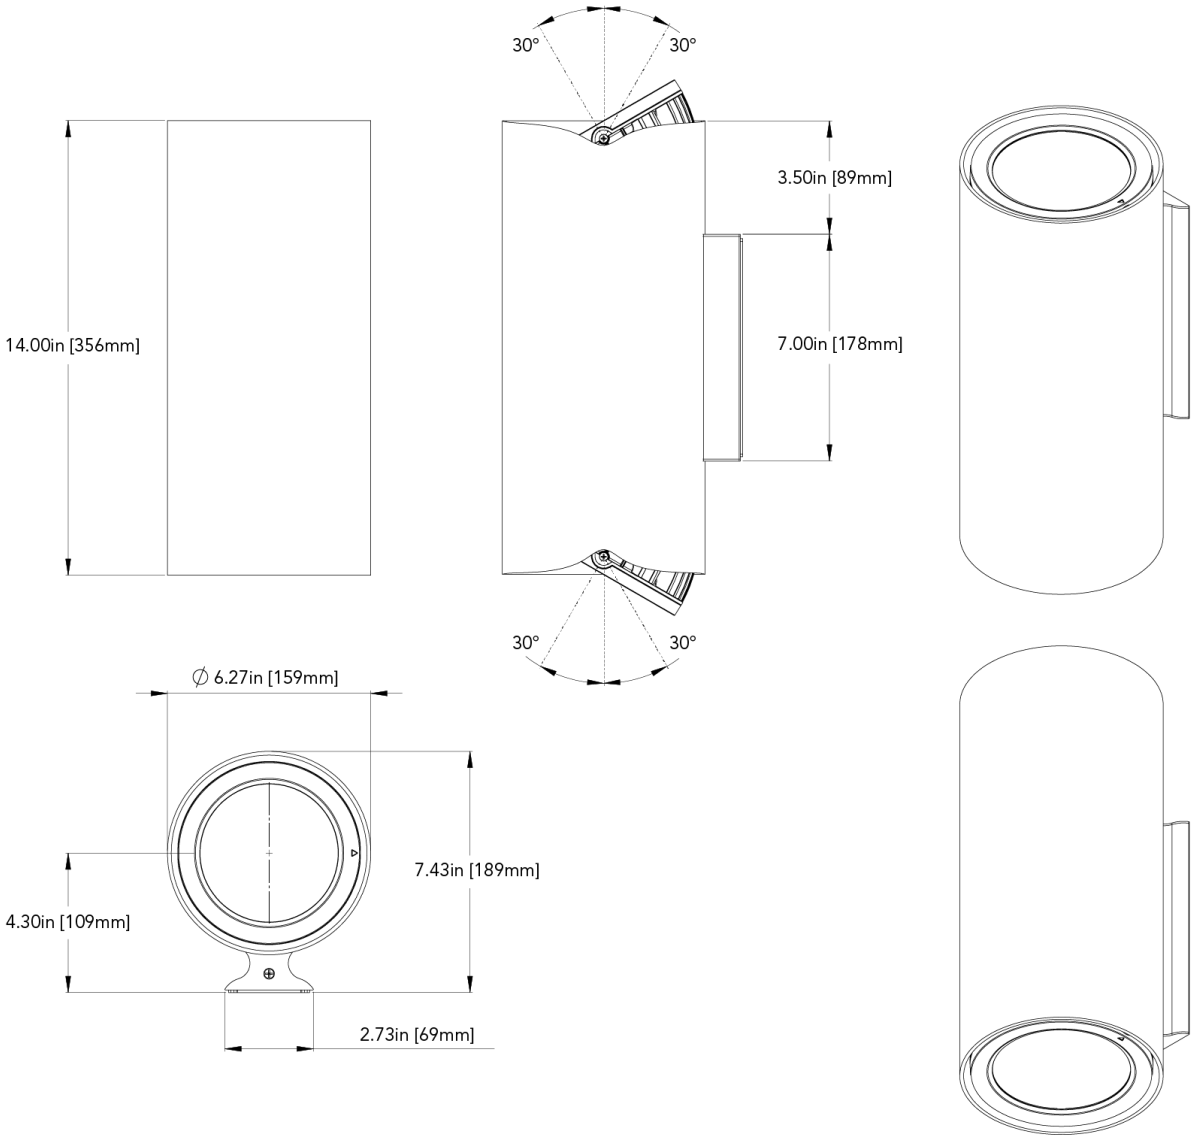


# CYLINDER EX™

## 6"- Full Size Tall Narrow Wall Mount Direct-Indirect

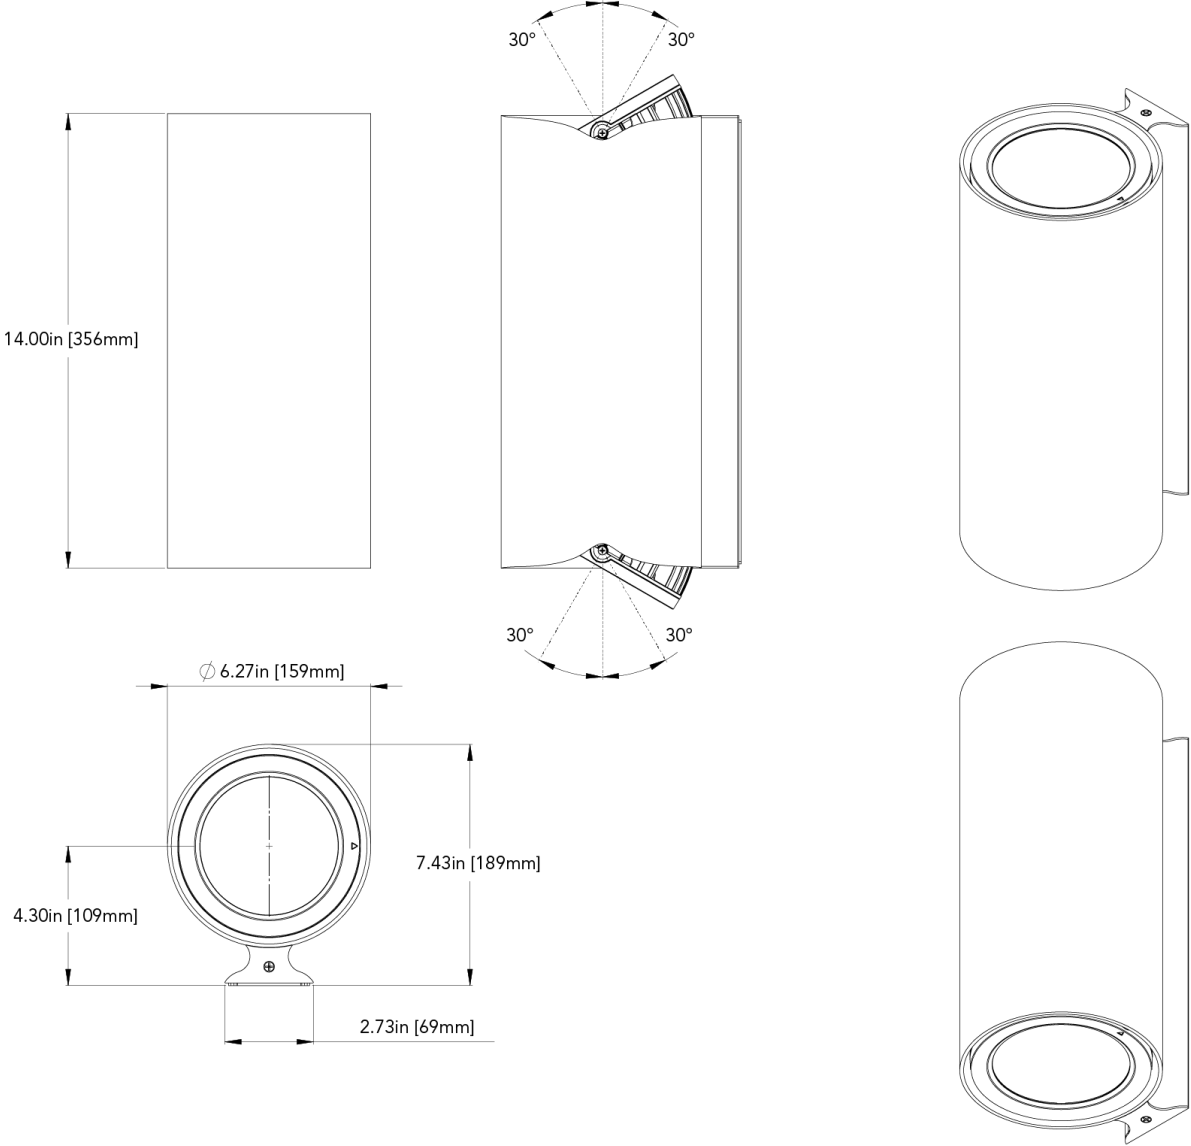

# CYLINDER EX™


6" - Classic Wall Mount Direct or Indirect only

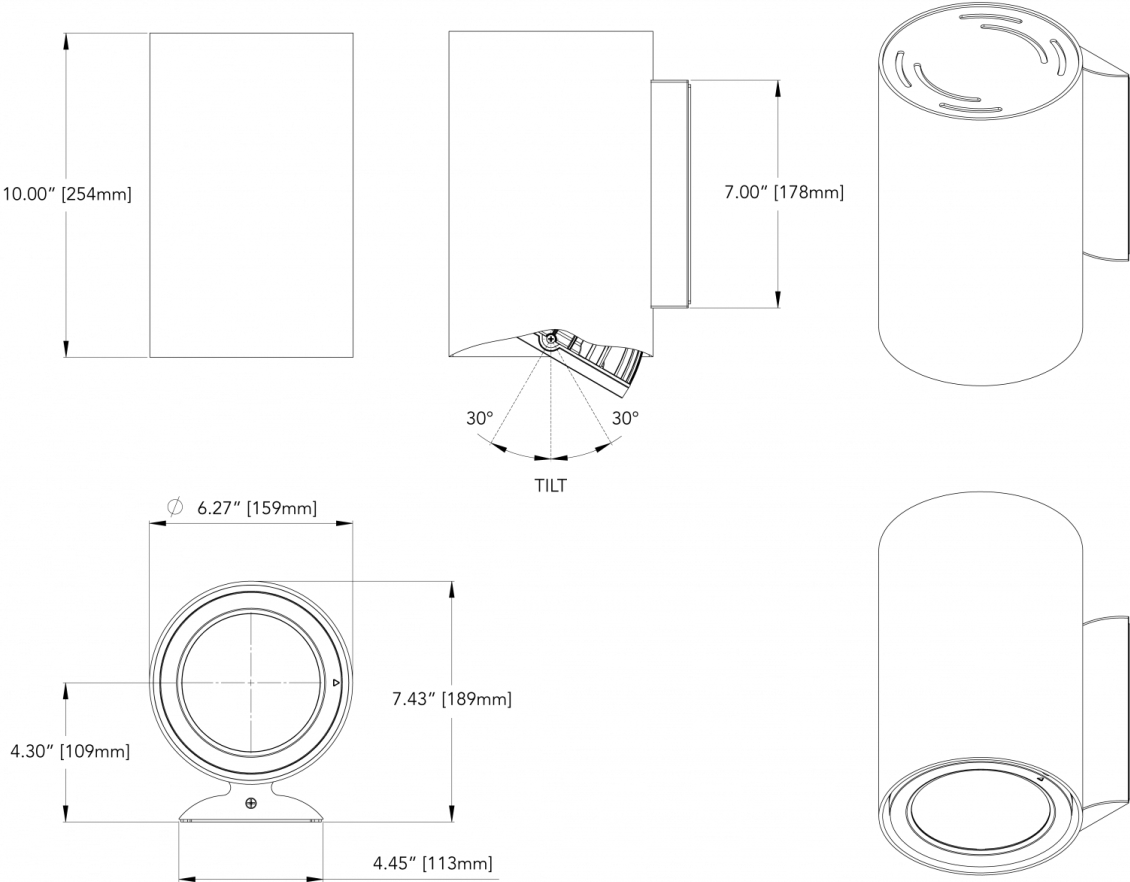




# CYLINDER EX™

## 6"- Narrow Wall Mount Direct/Indirect Only

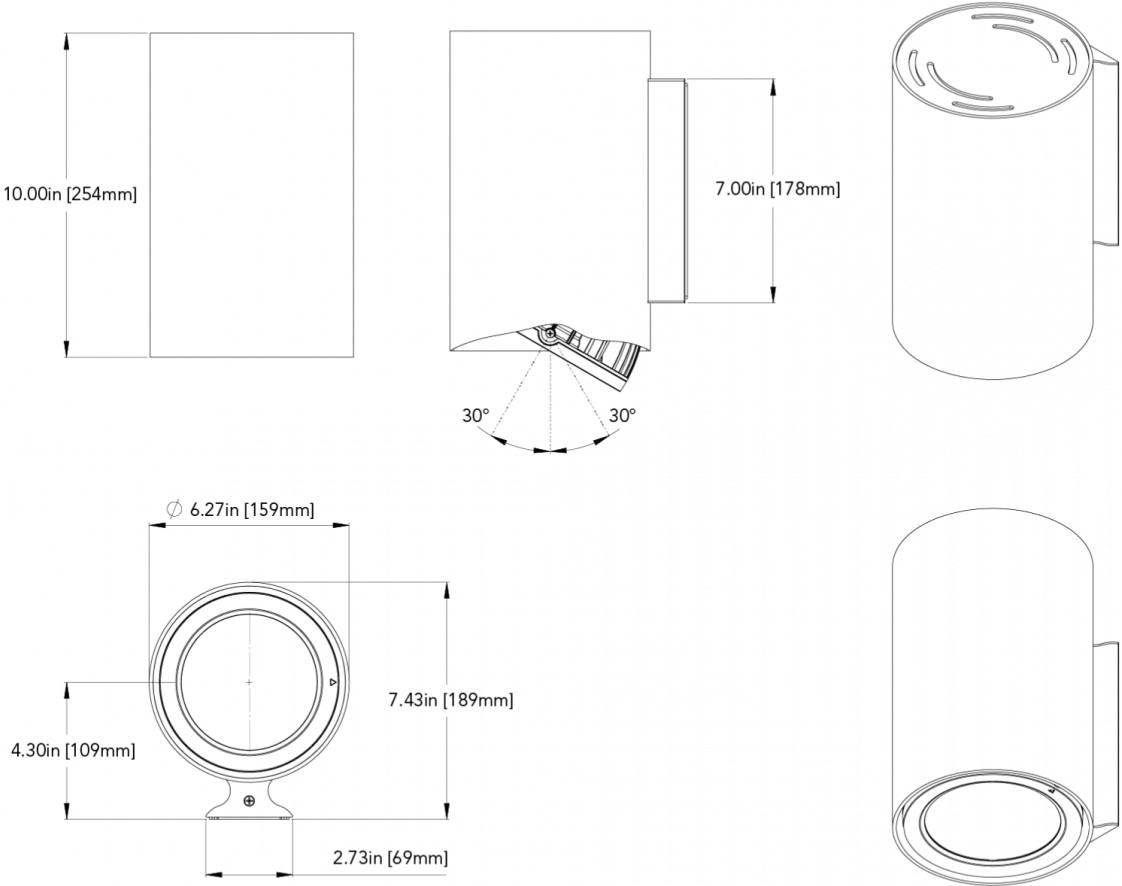

# CYLINDER EX™

## 6"- Half Size Narrow full Wall Mount Direct Only

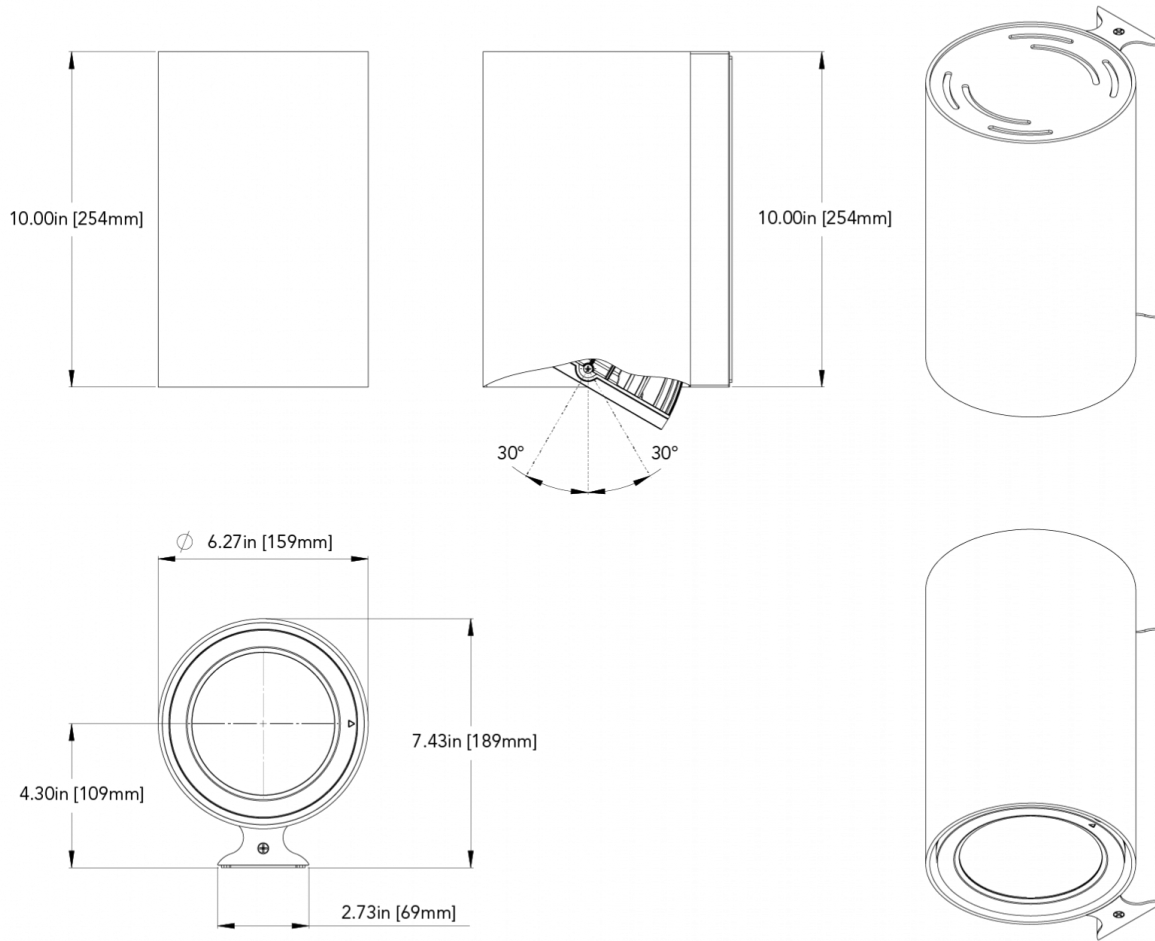

# CYLINDER EX™

## 6" - Pendant Stem Mount Direct Only

