






ENDLESS™


FULL SPECIFICATION SHEET

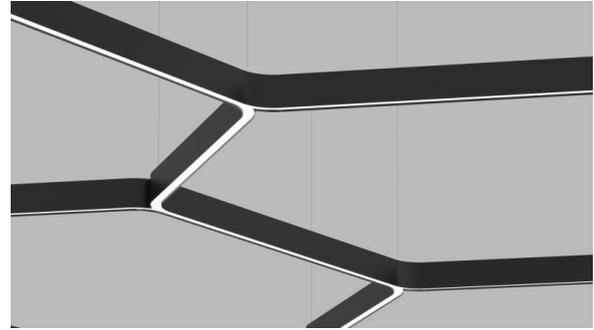

FIXTURE TYPE



FIXTURE CODE




QUANTITIES

1 DESCRIPTION

A fluent ribbon of light that moves and grooves in every direction. Customize your layout using eight distinct modules to create shapes and continuous lighting designs that integrate with spatial architecture in a truly transformative way. Build countless compositions, whether flowing and organic or geometric and structured. The smooth bends of the hubs bring levity to large-scale configurations, making spaces feel more inviting. **ENDLESS** adds dimensionality and visual continuity from ceiling to floor, harmonizing architectural elements throughout. Draw light along the floor plan to illuminate precisely where it's needed. Choose from three finish options: White, Black Metallic Textured, or Silver Metallic Textured.

2 OPTICS & FEATURES

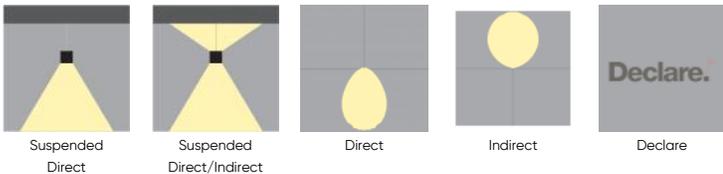

Suspended
Direct

Suspended
Direct/Indirect

Direct

Indirect

Declare

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Extruded and die-cast aluminum.

FINISH

Powder coated.

SUSPENSION

Steel cables.

REMOTE EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

DRIVERS

HPF electronic drivers for 120-277V, 347 (EU-240V). The driver is integral to the fixture housing.

LENS

Opal polycarbonate.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K CRI 90+.

DESIGNED BY

Serge Cornelissen.

DESIGN

US Pat. No. D1,084,462

POWER CABLE

Silver braided.

SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

MECHANICAL

Luminaires mount directly over J box (by others).

REPORTED L70 @25°C (77°F)

102,000 hrs @ 1600 lumens/ft (5200 lumens/m).

APPROVALS

Damp Rated.

SEISMIC BRACING

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

FIXTURE FINISH



White -
Textured



Black
Metallic
Textured¹



Silver
Metallic
Textured

¹ Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

CANOPY FINISH




6 HOW TO ORDER

1. Choose a Module

Each section to be ordered individually. Choose from one of the first 10 sections. Then proceed to the Lm/ft section. For larger sizes, refer to Tunnel Systems. One power cord for every 153 linear meters.


STRAIGHT SECTIONS - STANDALONE



Available in 4, 6, 8, 10 or 12 foot sections only.


- | | | | |
|--------------------------------------|--------------------------------------|-------------------------------------|-------------------------------------|
| EN1PSL04 4ft Direct | EN1PSL06 6ft Direct | EN1PSL08 8ft Direct | EN1PSL10 10ft Direct |
| EN1PSL12 12ft Direct | EN2PSL04 4ft Direct/Indirect | EN2PSL06 6ft Direct/Indirect | EN2PSL08 8ft Direct/Indirect |
| EN2PSL10 10ft Direct/Indirect | EN2PSL12 12ft Direct/Indirect | | |

STRAIGHT CONTINUOUS - MIDDLE SECTIONS




- | | | | |
|--|--|---|---|
| EN1PLO2M 2ft Middle section Direct | EN1PLO4M 4ft Middle section Direct | EN1PLO6M 6ft Middle section Direct | EN1PLO8M 8ft Middle section Direct |
| EN1PL10M 10ft Middle section Direct | EN1PL12M 12ft Middle section Direct | EN2PLO2M 2ft Middle section Direct/Indirect | EN2PLO4M 4ft Middle section Direct/Indirect |
| EN2PLO6M 6ft Middle section Direct/Indirect | EN2PLO8M 8ft Middle section Direct/Indirect | EN2PL10M 10ft Middle section Direct/Indirect | EN2PL12M 12ft Middle section Direct/Indirect |

STRAIGHT CONTINUOUS - END SECTIONS




- | | | | |
|---|---|--|--|
| EN1PLO2E 2ft End section Direct | EN1PLO4E 4ft End section Direct | EN1PLO6E 6ft End section Direct | EN1PLO8E 8ft End section Direct |
| EN1PL10E 10ft End section Direct | EN1PL12E 12ft End section Direct | EN2PLO2E 2ft End section Direct/Indirect | EN2PLO4E 4ft End section Direct/Indirect |
| EN2PLO6E 6ft End section Direct/Indirect | EN2PLO8E 8ft End section Direct/Indirect | EN2PL10E 10ft End section Direct/Indirect | EN2PL12E 12ft End section Direct/Indirect |

RIGHT HUB 90°

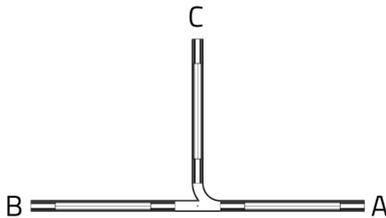


- | | | | |
|---|---|---|---|
| EN1PR90N 90° End caps not required Direct | EN1PR90A 90° A c/w end cap Direct | EN1PR90B 90° B c/w end cap Direct | EN1PR90C 90° C c/w end cap Direct |
| EN2PR90N 90° End caps not required Direct/Indirect | EN2PR90A 90° A c/w end cap Direct/Indirect | EN2PR90B 90° B c/w end cap Direct/Indirect | EN2PR90C 90° C c/w end cap Direct/Indirect |

RIGHT HUB 120°

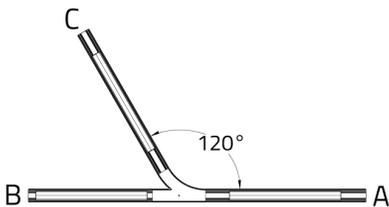

- | | | | |
|--|--|--|--|
| EN1PR12N 120° End caps not required Direct | EN1PR12A 120° A c/w end cap Direct | EN1PR12B 120° B c/w end cap Direct | EN1PR12C 120° C c/w end cap Direct |
| EN2PR12N 120° End caps not required Direct/Indirect | EN2PR12A 120° A c/w end cap Direct/Indirect | EN2PR12B 120° B c/w end cap Direct/Indirect | EN2PR12C 120° C c/w end cap Direct/Indirect |

LEFT HUB 90°

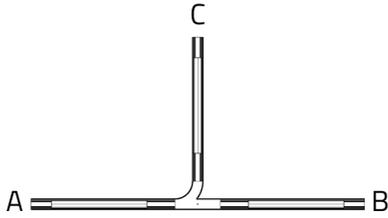

EN1PL90N 90° End caps not required Direct

EN1PL90A 90° A c/w end cap Direct

EN1PL90B 90° B c/w end cap Direct

EN1PL90C 90° C c/w end cap Direct


EN2PL90N 90° End caps not required Direct/Indirect

EN2PL90A 90° A c/w end cap Direct/Indirect

EN2PL90B 90° B c/w end cap Direct/Indirect

EN2PL90C 90° C c/w end cap Direct/Indirect

LEFT HUB 120°

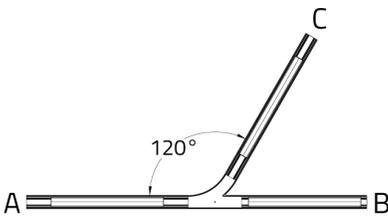

EN1PL12N 120° End caps not required Direct

EN1PL12A 120° A c/w end cap Direct

EN1PL12B 120° B c/w end cap Direct

EN1PL12C 120° C c/w end cap Direct


EN2PL12N 120° End caps not required Direct/Indirect

EN2PL12A 120° A c/w end cap Direct/Indirect

EN2PL12B 120° B c/w end cap Direct/Indirect

EN2PL12C 120° C c/w end cap Direct/Indirect

"Y" HUB 120°

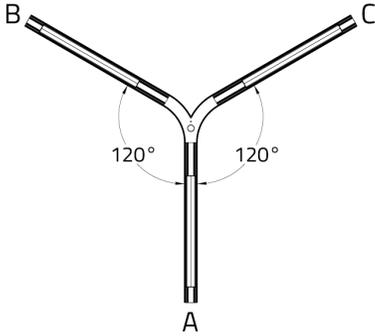

EN1PY12N 120° End caps not required Direct

EN1PY12A 120° A c/w end cap Direct

EN1PY12B 120° B c/w end cap Direct

EN1PY12C 120° C c/w end cap Direct


EN2PY12N 120° End caps not required Direct/Indirect

EN2PY12A 120° A c/w end cap Direct/Indirect

EN2PY12B 120° B c/w end cap Direct/Indirect

EN2PY12C 120° C c/w end cap Direct/Indirect

CORNER HUB 90°



EN1PC90N 90° End caps not required Direct

EN1PC90A 90° A c/w end cap Direct


EN1PC90B 90° B c/w end cap Direct

EN2PC90N 90° End caps not required Direct/Indirect

EN2PC90A 90° A c/w end cap Direct/Indirect

EN2PC90B 90° B c/w end cap Direct/Indirect

CORNER HUB 120°



EN1PC12N 120° End caps not required Direct

EN1PC12A 120° A c/w end cap Direct

EN1PC12B 120° B c/w end cap Direct

EN2PC12N 120° End caps not required Direct/Indirect

EN2PC12A 120° A c/w end cap Direct/Indirect

EN2PC12B 120° B c/w end cap Direct/Indirect

CUSTOM SHAPE

ENCST01 Custom Shape Required

2. LM/FT (DIRECT)

LPF030 300 lm/ft ¹

LPF050 500 lm/ft ²

LPF070 700 lm/ft ³

Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

3. LM/FT (INDIRECT)

LPG000 Not required

LPG050 500 lm/ft

LPG070 700 lm/ft

LPG090 900 lm/ft

4. CRI

CR90 CRI 90+

5. CCT

CTA30 3000K

CTA35 3500K

CTA40 4000K

6. DIRECT LENS

DD3 Diffused

7. INDIRECT LENS

UD0 Not required

UD2 Opal

8. VOLTAGE

V1 120/277V

V2 240V ¹

¹ Not available in North America.

9. DIMMING

DA01 0-10V Dimming 1.0%

10. SUSPENSION

HLA03 3ft cable suspension

HLA06 6ft cable suspension

HLA09 9ft cable suspension

11. FIXTURE FINISH

FA01 White - Textured

FA02 Black Metallic Textured ¹

FA20 Silver Metallic Textured

¹ Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

12. CANOPY FINISH

CF01 White - Textured

CF02 Black Metallic Textured

CF20 Silver Metallic Textured

13. CIRCUITS

CS1 Single circuit

CS2 Dual circuit

14. EMERGENCY

E0 Not required

E2 Emergency system - remote

15. POWER CABLE

PC0 Not required

PC1 Power cable required ¹


¹ At least one power cable is required for the entire fixture (all modules combined). One power cable covers 50ft of the linear run. If it is over 50ft, make sure to add a power cable to another module within the fixture.

16. SENSORS


Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

7 PERFORMANCE DATA


DIRECT (WHITE/SILVER METALLIC TEXTURED) DIFFUSED (DD3)

	LUMEN/FT	WATT/FT	LPW
	700	12	61
	500	8	66
	300	5	73


DIRECT (BLACK METALLIC TEXTURED) DIFFUSED (DD3)

	LUMEN/FT	WATT/FT	LPW
	500	12	38
	300	8	41

INDIRECT (WHITE/SILVER METALLIC TEXTURED) OPAL (UD2)


	LUMEN/FT	WATT/FT	LPW
	900	9	84
	700	7	89
	500	4	98

INDIRECT (BLACK METALLIC TEXTURED) OPAL (UD2)


	LUMEN/FT	WATT/FT	LPW
	900	11	60
	700	9	63
	500	6	68

8 DIMENSIONAL DIAGRAMS


**FIXTURE
CROSS SECTION**




HUB - Y120S

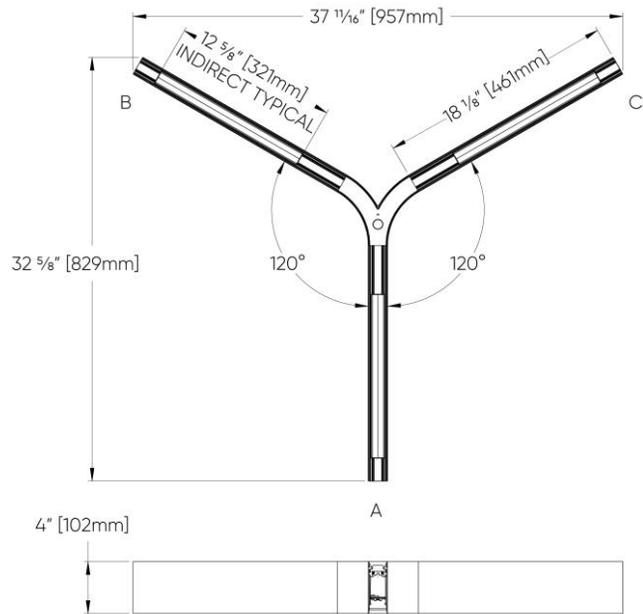


HUB - C90

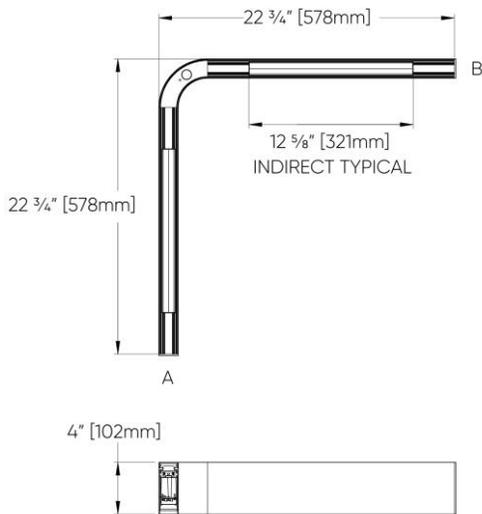


HUB - C120

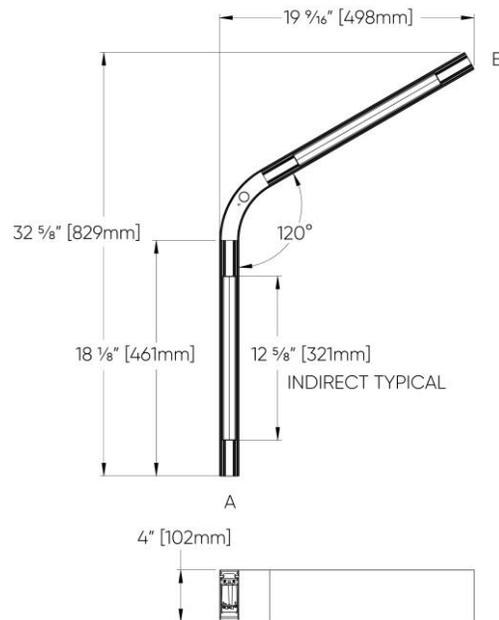


HUB - Y90L

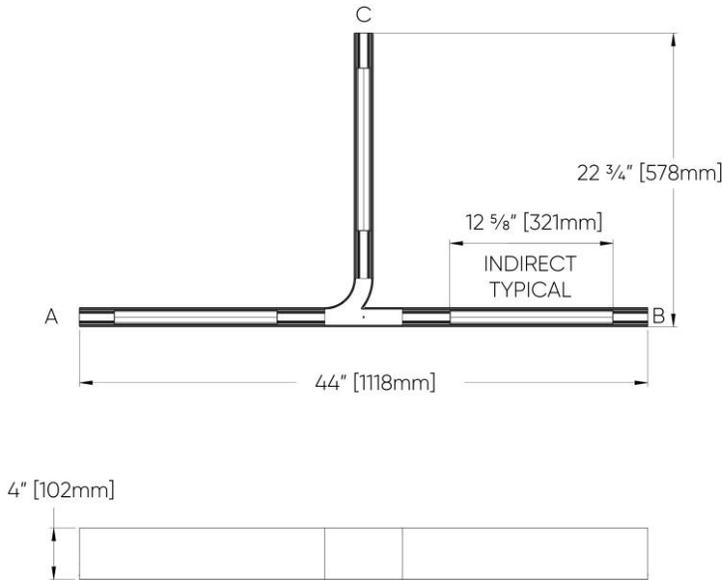

HUB - Y90R

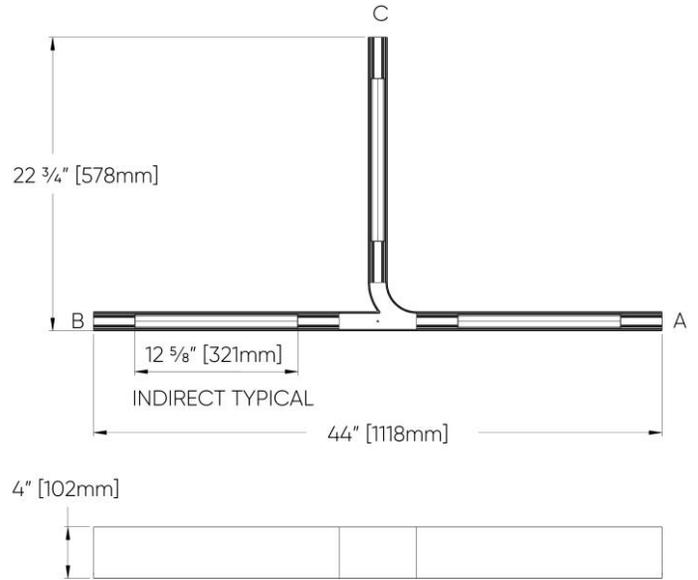

HUB - Y120L

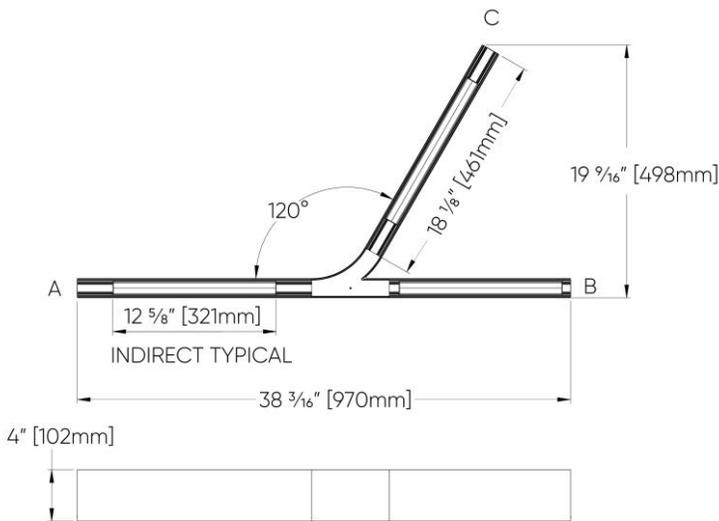

HUB - Y120R

