





ENDLESS™

SHORT SPECIFICATION SHEET

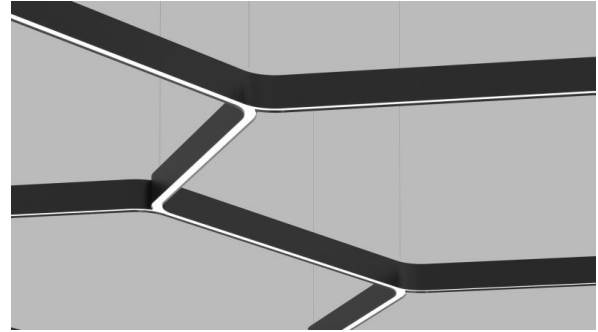

FIXTURE TYPE



FIXTURE CODE




QUANTITIES

1 HOW TO ORDER

1. Choose a Module

Each section to be ordered individually. Choose from one of the first 10 sections. Then proceed to the Lm/ft section. For larger sizes, refer to Tunnel Systems. One power cord for every 153 linear meters.

STRAIGHT SECTIONS - STANDALONE



Available in 4, 6, 8, 10 or 12 foot sections only.

EN1PSL04 4ft Direct

EN1PSL06 6ft Direct

EN1PSL08 8ft Direct

EN1PSL10 10ft Direct

EN1PSL12 12ft Direct

EN2PSL04 4ft Direct/Indirect

EN2PSL06 6ft Direct/Indirect


EN2PSL08 8ft Direct/Indirect

EN2PSL10 10ft Direct/Indirect

EN2PSL12 12ft Direct/Indirect

STRAIGHT CONTINUOUS - MIDDLE SECTIONS


TOP VIEW - STRAIGHT CONTINUOUS



| | | | |
|---|---|--|--|
| EN1PLO2M 2ft Middle section Direct | EN1PLO4M 4ft Middle section Direct | EN1PLO6M 6ft Middle section Direct | EN1PLO8M 8ft Middle section Direct |
| EN1PL10M 10ft Middle section Direct | EN1PL12M 12ft Middle section Direct | EN2PLO2M 2ft Middle section Direct/Indirect | EN2PLO4M 4ft Middle section Direct/Indirect |
| EN2PLO6M 6ft Middle section Direct/Indirect | EN2PLO8M 8ft Middle section Direct/Indirect | EN2PL10M 10ft Middle section Direct/Indirect | EN2PL12M 12ft Middle section Direct/Indirect |


STRAIGHT CONTINUOUS - END SECTIONS

TOP VIEW - STRAIGHT CONTINUOUS




| | | | |
|--|--|---|---|
| EN1PLO2E 2ft End section Direct | EN1PLO4E 4ft End section Direct | EN1PLO6E 6ft End section Direct | EN1PLO8E 8ft End section Direct |
| EN1PL10E 10ft End section Direct | EN1PL12E 12ft End section Direct | EN2PLO2E 2ft End section Direct/Indirect | EN2PLO4E 4ft End section Direct/Indirect |
| EN2PLO6E 6ft End section Direct/Indirect | EN2PLO8E 8ft End section Direct/Indirect | EN2PL10E 10ft End section Direct/Indirect | EN2PL12E 12ft End section Direct/Indirect |

RIGHT HUB 90°

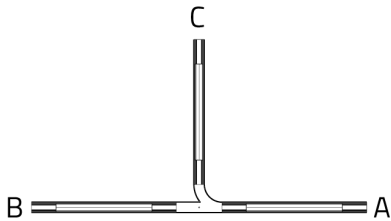

| | | | |
|---|---|---|---|
| EN1PR90N 90° End caps not required Direct | EN1PR90A 90° A c/w end cap Direct | EN1PR90B 90° B c/w end cap Direct | EN1PR90C 90° C c/w end cap Direct |
| EN2PR90N 90° End caps not required Direct/Indirect | EN2PR90A 90° A c/w end cap Direct/Indirect | EN2PR90B 90° B c/w end cap Direct/Indirect | EN2PR90C 90° C c/w end cap Direct/Indirect |

RIGHT HUB 120°

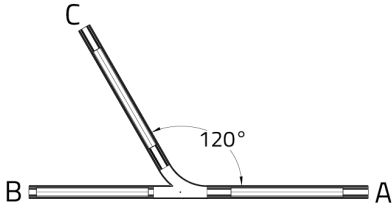

EN1PR12N 120° End caps not required Direct

EN1PR12A 120° A c/w end cap Direct

EN1PR12B 120° B c/w end cap Direct

EN1PR12C 120° C c/w end cap Direct


EN2PR12N 120° End caps not required Direct/Indirect

EN2PR12A 120° A c/w end cap Direct/Indirect

EN2PR12B 120° B c/w end cap Direct/Indirect

EN2PR12C 120° C c/w end cap Direct/Indirect

LEFT HUB 90°

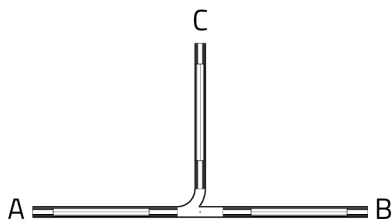

EN1PL90N 90° End caps not required Direct

EN1PL90A 90° A c/w end cap Direct

EN1PL90B 90° B c/w end cap Direct

EN1PL90C 90° C c/w end cap Direct


EN2PL90N 90° End caps not required Direct/Indirect

EN2PL90A 90° A c/w end cap Direct/Indirect

EN2PL90B 90° B c/w end cap Direct/Indirect

EN2PL90C 90° C c/w end cap Direct/Indirect

LEFT HUB 120°

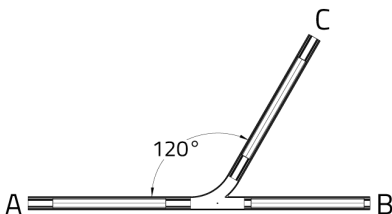

EN1PL12N 120° End caps not required Direct

EN1PL12A 120° A c/w end cap Direct

EN1PL12B 120° B c/w end cap Direct

EN1PL12C 120° C c/w end cap Direct


EN2PL12N 120° End caps not required Direct/Indirect

EN2PL12A 120° A c/w end cap Direct/Indirect

EN2PL12B 120° B c/w end cap Direct/Indirect

EN2PL12C 120° C c/w end cap Direct/Indirect

"Y" HUB 120°

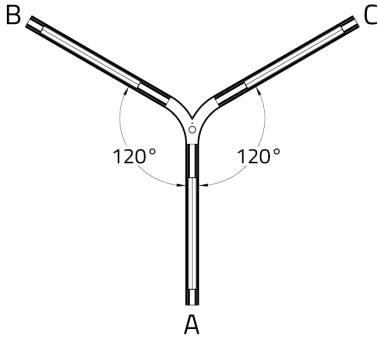

EN1PY12N 120° End caps not required Direct

EN1PY12A 120° A c/w end cap Direct

EN1PY12B 120° B c/w end cap Direct

EN1PY12C 120° C c/w end cap Direct


EN2PY12N 120° End caps not required Direct/Indirect

EN2PY12A 120° A c/w end cap Direct/Indirect

EN2PY12B 120° B c/w end cap Direct/Indirect

EN2PY12C 120° C c/w end cap Direct/Indirect

CORNER HUB 90°



EN1PC90N 90° End caps not required Direct

EN1PC90A 90° A c/w end cap Direct


EN1PC90B 90° B c/w end cap Direct

EN2PC90N 90° End caps not required Direct/Indirect

EN2PC90A 90° A c/w end cap Direct/Indirect

EN2PC90B 90° B c/w end cap Direct/Indirect

CORNER HUB 120°



EN1PC12N 120° End caps not required Direct

EN1PC12A 120° A c/w end cap Direct

EN1PC12B 120° B c/w end cap Direct

EN2PC12N 120° End caps not required Direct/Indirect

EN2PC12A 120° A c/w end cap Direct/Indirect

EN2PC12B 120° B c/w end cap Direct/Indirect

CUSTOM SHAPE

ENCST01 Custom Shape Required

2. LM/FT (DIRECT)

LPF030 300 lm/ft ¹

LPF050 500 lm/ft ²

LPF070 700 lm/ft ³

Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

3. LM/FT (INDIRECT)

LPG000 Not required

LPG050 500 lm/ft

LPG070 700 lm/ft

LPG090 900 lm/ft

4. CRI

CR90 CRI 90+

5. CCT

CTA30 3000K

CTA35 3500K

CTA40 4000K

6. DIRECT LENS

DD3 Diffused

7. INDIRECT LENS

UD0 Not required

UD2 Opal

8. VOLTAGE

V1 120/277V **V2** 240V ¹

¹ Not available in North America.

9. DIMMING

DA01 0-10V Dimming 1.0%

10. SUSPENSION

HLA03 3ft cable suspension **HLA06** 6ft cable suspension **HLA09** 9ft cable suspension

11. FIXTURE FINISH

FA01 White - Textured **FA02** Black Metallic Textured ¹ **FA20** Silver Metallic Textured

¹ Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

12. CANOPY FINISH

CF01 White - Textured **CF02** Black Metallic Textured **CF20** Silver Metallic Textured

13. CIRCUITS

CS1 Single circuit **CS2** Dual circuit

14. EMERGENCY

E0 Not required **E1** Emergency system - Integral ^{1 2}

¹ An extra power cord will be supplied to each section of the fixture when ordering emergency.

² Consult factory. A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

15. POWER CABLE

PC0 Not required **PC1** Power cable required ¹

¹ At least one power cable is required for the entire fixture (all modules combined). One power cable covers 50ft of the linear run. If it is over 50ft, make sure to add a power cable to another module within the fixture.

16. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.