



Project Name: Fixture Type:

Fixture Code: Quantities:

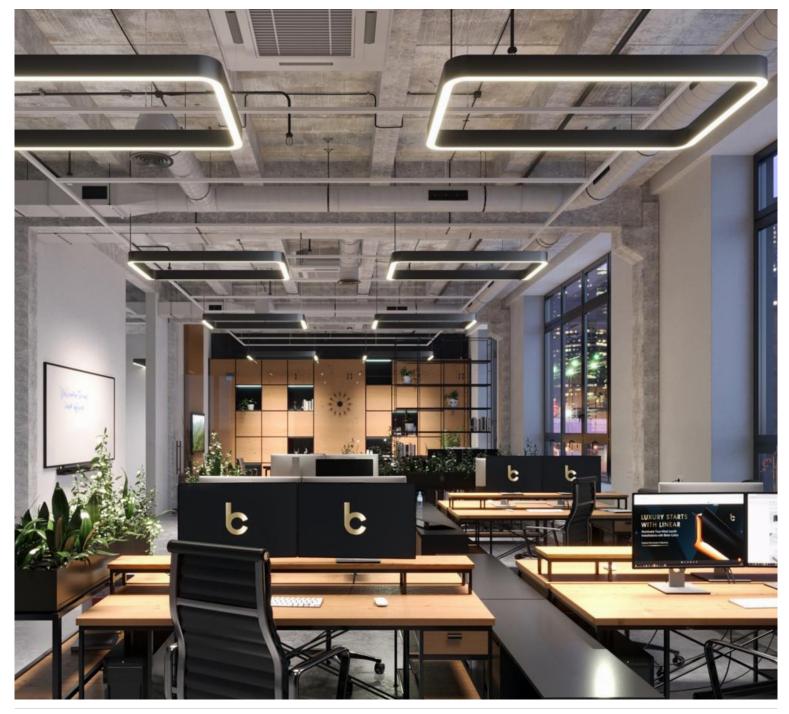

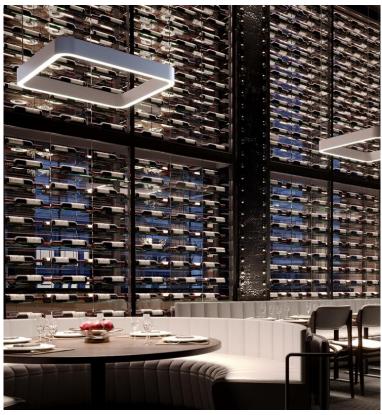

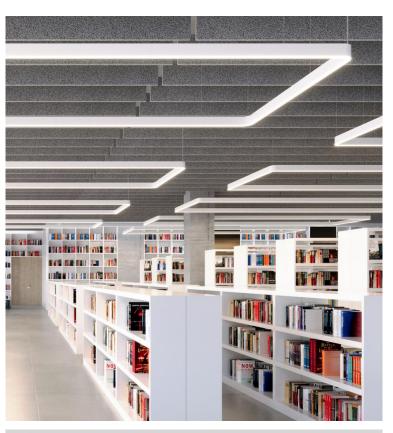

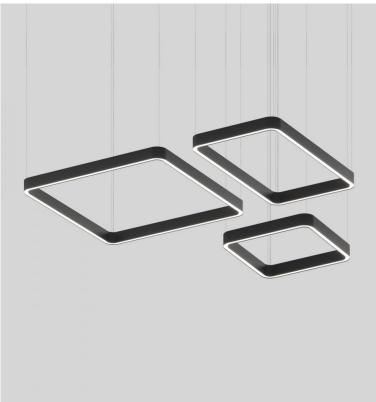



The fluid lines of the Endless linear system morph into finite rectangular forms. With warm rounded corners, ENDLESS QUAD adds a comforting structure to functional spaces. Simple and succinct, the quadrilateral provides geometric definition to the ceiling area that can be used to frame special areas. Crank up the design but turn down the noise with our new acoustic panel styles.

#### **GENERAL SPECIFICATION**

**Body** 

Extruded and die-cast aluminum.

Suspension

Steel cables.

Remote Emergency system

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

**Drivers** 

HPF electronic drivers for 120-277V, 347 (EU-240V). The driver is integral to the fixture housing.

**Acoustic Panels Fire Rating** 

ASTM E84-2018 Class A.

**Acoustic Panels Thickness** 

12mm (0.5")

Diffuser

Opal polycarbonate.

**Delivered lumens** 

Delivered lumens & LPW based on 4000K CRI 90+.

Designed by

Serge Cornelissen.

Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

Finish

Powder coated.

Power cable

Silver braided.

Sensors

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

**Acoustic Panels NRC Rating** 

0.80

**Acoustic Panels Material** 

100% recycled polyester fiber (PET).

Mechanical

Luminaires mount directly over J box (by others).

Reported L70 @25°C (77°F)

60,000 hrs @ 1600 lumens/ft (5200 lumens/m).

Approvals

Damp Rated.

Design

US Design Patent Pending.

**Acoustic Panel Maintenance** 

Durable and easy to maintain. Dust regularly and clean marks with mild detergent, rinse, and blot.

#### **OPTICS & FEATURES**





Suspended Direct Suspended Direct/Indirect





Direct



Indirect





Declare

PoE

#### **HOW TO ORDER**

#### A. LUMINAIRE

**ENDQ1P01** 34" Square Direct **ENDQ ENDQ2P02** 58" Square Direct/Indirect **ENDQ** 

**ENDQ1P02** 58" Square Direct **ENDQ2P03** 34"x58" Direct/Indirect

ENDQ1P03 34"x58" Direct

ENDQ2P01 34" Square Direct/Indirect

B. LM/FT (DIRECT)

LPF030 300 lm/ft 1

**LPF050** 500 lm/ft <sup>2</sup>

LPF070 700 lm/ft 3

Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

#### C. LM/FT (INDIRECT)

**LPG000** Not required

**LPG050** 500 lm/ft

**LPG070** 700 lm/ft

**LPG090** 900 lm/ft

D. CRI

CR90 CRI 90+

E. CCT (DIRECT)

**CTA30** 3000K **CTA35** 3500K

CTA40 4000K

F. CCT (INDIRECT)

CTB00 Not required

**CTB30** 3000K

**CTB35** 3500K

CTB40 4000K

#### **G. DIRECT DIFFUSER**

**DD3** Direct light diffuser

#### H. INDIRECT DIFFUSER

**UDO** Not required

**UD2** Opal diffuser

#### I. VOLTAGE

**V1** 120/277V

### J. DIMMING

**DA01** 0-10V Dimming 1.0%

## K. CEILING TYPE

H1 Hard ceiling 1

#### L. SUSPENSION

**HLA03** 3ft cable suspension **HLA09** 9ft cable suspension **HLA09** 9ft cable suspension

M. FIXTURE FINISH

**FA01** White **FA02** Black Metallic Textured <sup>1</sup> **FA20** Silver Metallic Textured

#### **N. CANOPY FINISH**

CF01 White CF02 Black Metallic Textured CF20 Silver Metallic Textured



<sup>&</sup>lt;sup>1</sup> Designed for drywall ceilings.

<sup>&</sup>lt;sup>1</sup> Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

#### **ACOUSTIC PANEL STYLE**

APS00 Not required APS01 Flat APS02 Cross Hatch APS03 Fine Cross Hatch

**APS04** Parallel Hatch

Available in 4 styles for the 34" Sq and the 34"x58" versions. The 58" Sq available with visible seams. Consult factory for details.

#### **ACOUSTIC PANEL COLOR**

AP00 Not requiredAP02 CitrusAP04 WhiteAP08 Red CoffeeAP11 Light GrayAP13 Apple GreenAP22 BlueAP26 Sesame GrayAP27 BlackAP47 Navy PeonyAP60 Pure RedAP73 Cloudburst

AP89 Douglas Fir APW01 Oak

Contact factory for additional colors.

### O. EMERGENCY

**EO** Not required **E2** Emergency system - remote

Available upon request, consult factory for details.

#### P. CIRCUITS

**CS1** Single circuit **CS2** Dual circuit


Q. SENSORS

### **FIXTURE FINISH**




<sup>&</sup>lt;sup>1</sup> Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

#### **CANOPY FINISH**

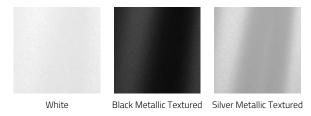

#### **ACOUSTIC PANEL STYLE**

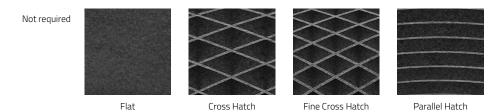

Available in 4 styles for the 34" Sq and the 34"x58" versions. The 58" Sq available with visible seams. Consult factory for details.

#### **ACOUSTIC PANEL COLOR**



Contact factory for additional colors.

### **APPROVALS**












## PERFORMANCE DATA

DIRECT (WHITE/SILVER METALLIC TEXTURED) DIFFUSED (DD3)	LUMEN/FT	WATT/FT	LPW
	700 500 300	12 8 5	61 66 73
DIRECT (BLACK METALLIC TEXTURED) DIFFUSED (DD3)	LUMEN/FT	WATT/FT	LPW
	500 300	12 8	38 41
INDIRECT (WHITE/SILVER METALLIC TEXTURED) OPAL (UD2)	LUMEN/FT	WATT/FT	LPW
	900 700 500	9 7 4	84 89 98


INDIRECT (BLACK METALLIC TEXTURED) OPAL (UD2)	LUMEN/FT	WATT/FT	LPW
	900	11	60
	700	9	63
	500	6	68


## **DIMENSIONAL DIAGRAMS**

### FIXTURE CROSS SECTION






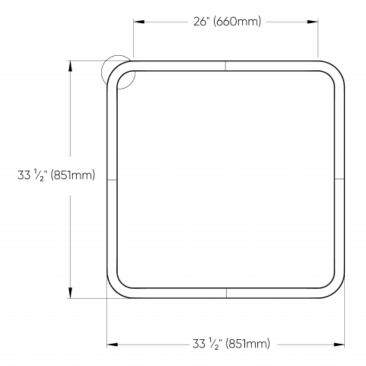


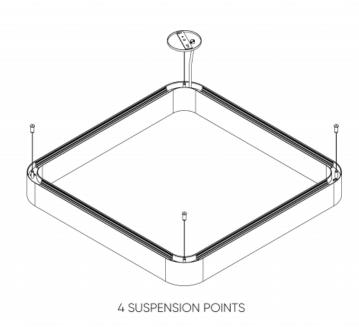


## FIXTURE CROSS SECTION





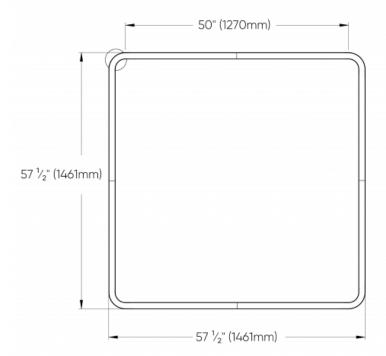

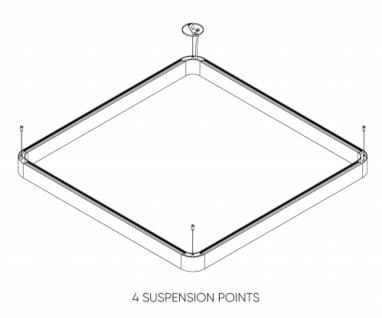

## FIXTURE CROSS SECTION

