

ENDLESS QUAD™ - SUSPENDED

Project Name:




Fixture Type:

Fixture Code:

Quantities:



ENDLESS QUAD™ - SUSPENDED

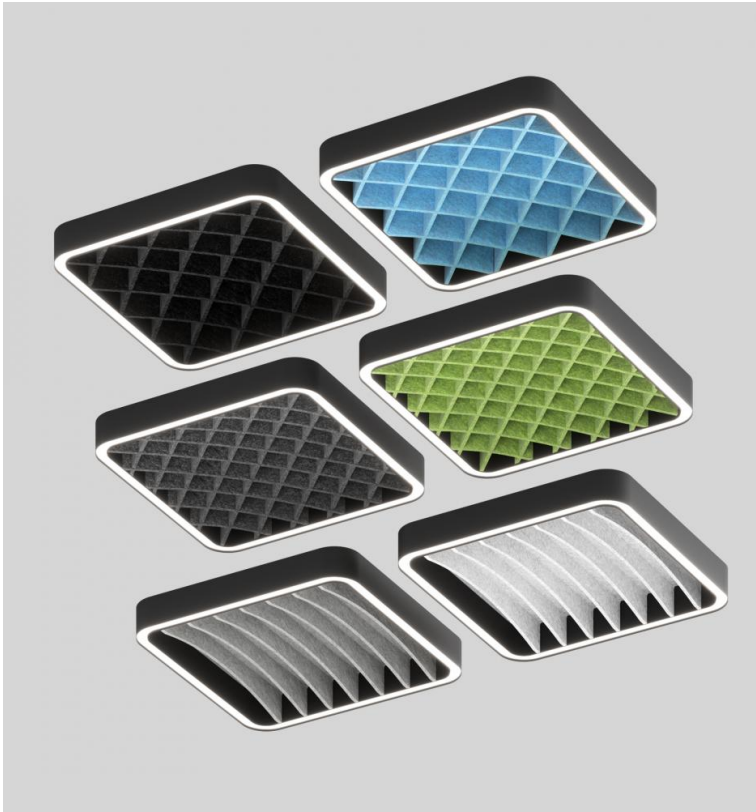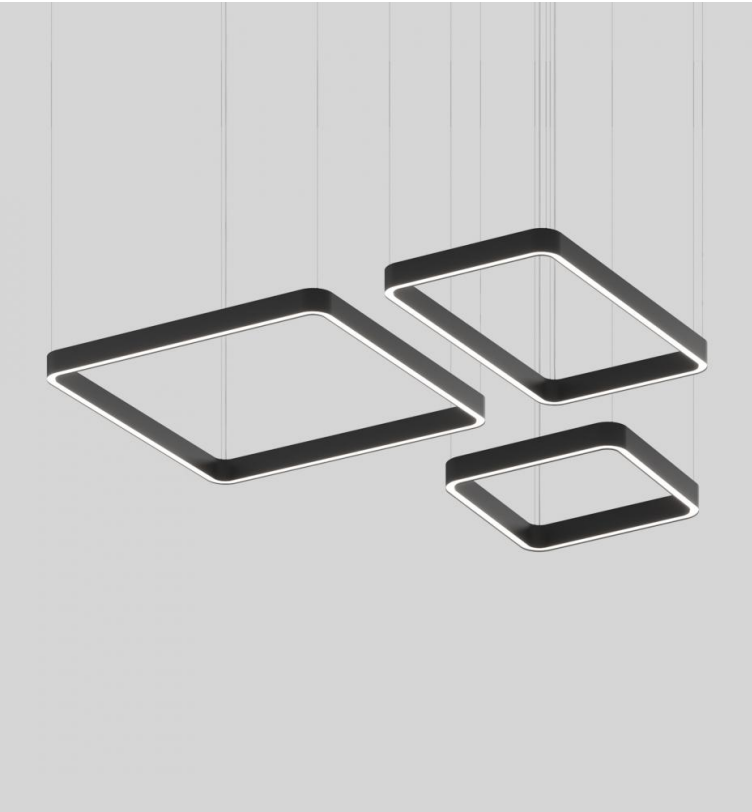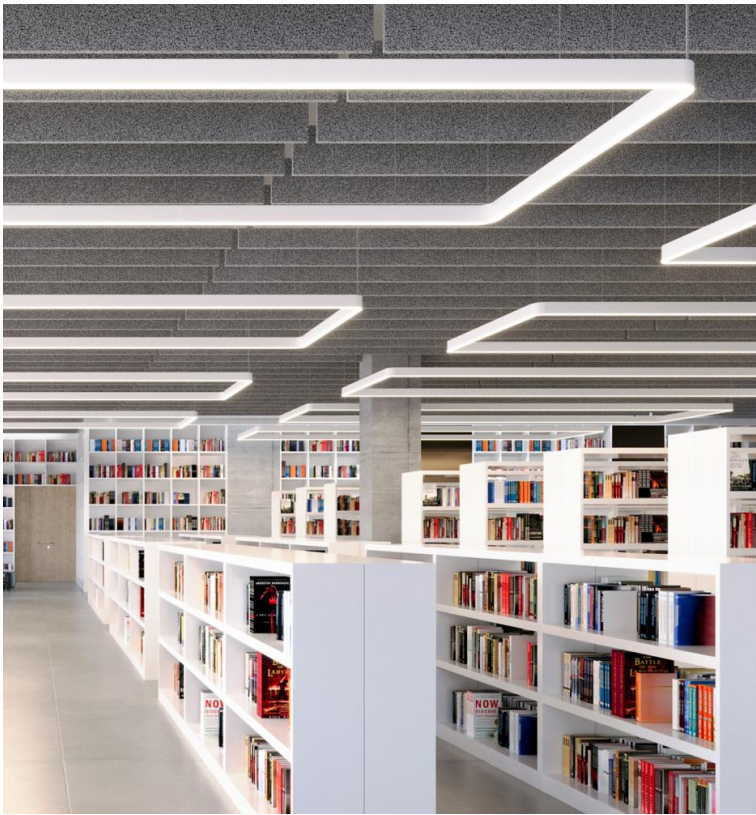

ENDLESS QUAD™ - SUSPENDED

The fluid lines of the Endless linear system morph into finite rectangular forms. With warm rounded corners, **ENDLESS QUAD** adds a comforting structure to functional spaces. Simple and succinct, the quadrilateral provides geometric definition to the ceiling area that can be used to frame special areas. Crank up the design but turn down the noise with our new acoustic panel styles.

GENERAL SPECIFICATION

Body

Extruded and die-cast aluminum.

Suspension

Steel cables.

Remote Emergency system

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Drivers

HPF electronic drivers for 120-277V, 347 (EU-240V). The driver is integral to the fixture housing.

Diffuser

Opal polycarbonate.

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 90+.

Designed by

Serge Cornelissen.

Finish

Powder coated.

Power cable

Silver braided.

Sensors

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

Mechanical

Luminaires mount directly over J box (by others).

Reported L70 @25°C (77°F)

60,000 hrs @ 1600 lumens/ft (5200 lumens/m).

Approvals

Damp Rated.

Design

US Design Patent Pending.


MOUNTING & OPTICS




Suspended Direct




Suspended Direct/Indirect



Direct



Indirect



Declare



PoE

ENDLESS QUAD™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

ENDQ1P01 34" Square Direct

ENDQ1P02 58" Square Direct

ENDQ1P03 34"x58" Direct

ENDQ2P01 34" Square Direct/Indirect

ENDQ2P02 58" Square Direct/Indirect

ENDQ2P03 34"x58" Direct/Indirect

B. LM/FT (DIRECT)

LPF030 300 lm/ft ¹

LPF050 500 lm/ft ²

LPF070 700 lm/ft ³

Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

C. LM/FT (INDIRECT)

LPG000 Not required

LPG050 500 lm/ft

LPG070 700 lm/ft

LPG090 900 lm/ft

D. CRI

CR90 CRI 90+

E. CCT (DIRECT)

CTA30 3000K

CTA35 3500K

CTA40 4000K

F. CCT (INDIRECT)

CTB00 Not required

CTB30 3000K

CTB35 3500K

CTB40 4000K

G. DIRECT DIFFUSER

DD3 Direct light diffuser

H. INDIRECT DIFFUSER

UDO Not required

UD2 Opal diffuser

I. VOLTAGE

V1 120/277V

J. DIMMING

DA01 0-10V Dimming 1.0%

K. CEILING TYPE

H1 Hard ceiling ¹

¹ Designed for drywall ceilings.

L. SUSPENSION

HLA03 3ft cable suspension

HLA06 6ft cable suspension

HLA09 9ft cable suspension

M. FIXTURE FINISH

FA01 White

FA02 Black Metallic Textured ¹

FA20 Silver Metallic Textured

¹ Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

N. CANOPY FINISH

CF01 White

CF02 Black Metallic Textured

CF20 Silver Metallic Textured



ENDLESS QUAD™ - SUSPENDED

ACOUSTIC PANEL STYLE

APS00 Not required
APS04 Parallel Hatch

APS01 Flat

APS02 Cross Hatch

APS03 Fine Cross Hatch

Available in 4 styles for the 34" Sq and the 34"x58" versions. The 58" Sq available with visible seams. Consult factory for details.

ACOUSTIC PANEL COLOR

AP00 Not required
AP11 Light Gray

AP04 White
AP26 Sesame Gray

AP13 Apple Green
AP27 Black

AP22 Blue

Other finishes available. Consult factory.

O. EMERGENCY

EO Not required

E2 Emergency system - remote

Available upon request, consult factory for details.

P. CIRCUITS

CS1 Single circuit

CS2 Dual circuit

Q. SENSORS

ENDLESS QUAD™ - SUSPENDED

FIXTURE FINISH




¹ Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

CANOPY FINISH




ACOUSTIC PANEL STYLE

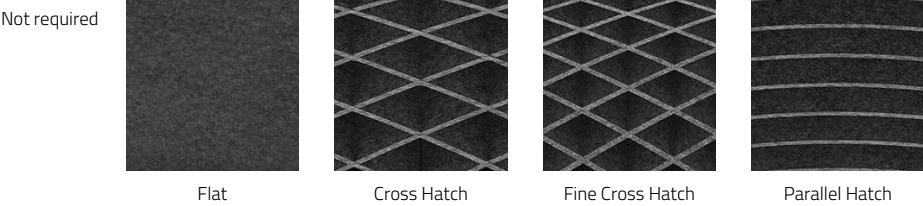

Available in 4 styles for the 34" Sq and the 34"x58" versions. The 58" Sq available with visible seams. Consult factory for details.

ACOUSTIC PANEL COLOR

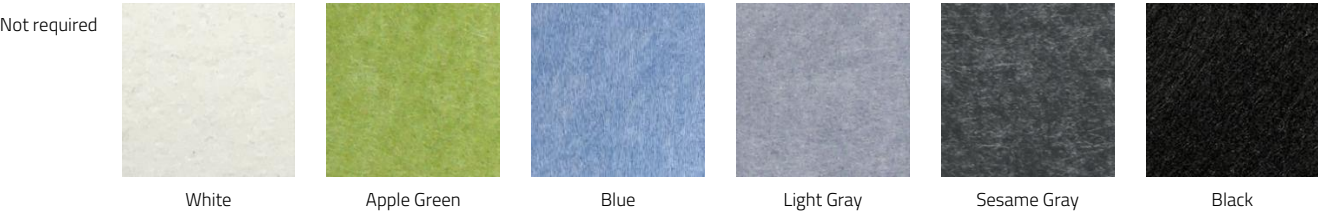

Other finishes available. Consult factory.

APPROVALS



ENDLESS QUAD™ - SUSPENDED


PERFORMANCE DATA

**DIRECT (WHITE/SILVER METALLIC TEXTURED)
DIFFUSED (DD3)**

LUMEN/FT

WATT/FT

LPW

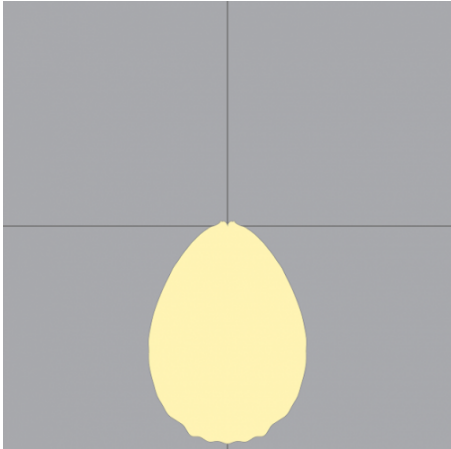

700
500
300

12
8
5


61
66
73

**DIRECT (BLACK METALLIC TEXTURED) DIFFUSED
(DD3)**

LUMEN/FT

WATT/FT

LPW

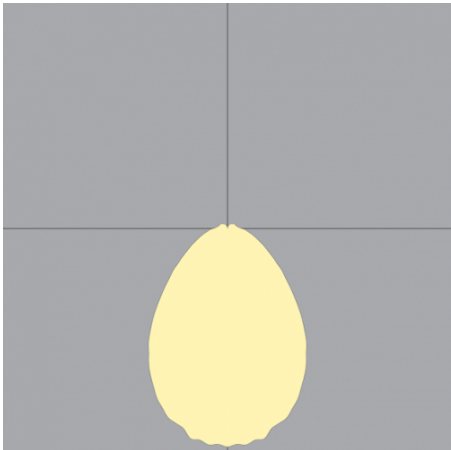

500
300

12
8


38
41

**INDIRECT (WHITE/SILVER METALLIC TEXTURED)
OPAL (UD2)**

LUMEN/FT

WATT/FT

LPW

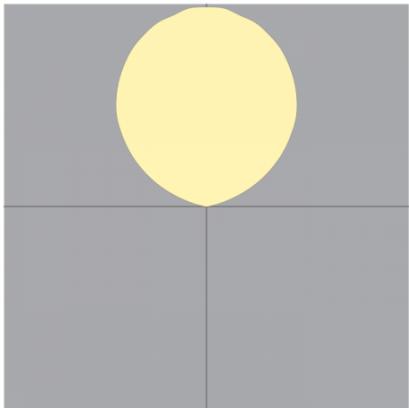

900
700
500

9
7
4

84
89
98


ENDLESS QUAD™ - SUSPENDED

INDIRECT (BLACK METALLIC TEXTURED) OPAL
(UD2)

LUMEN/FT

WATT/FT

LPW

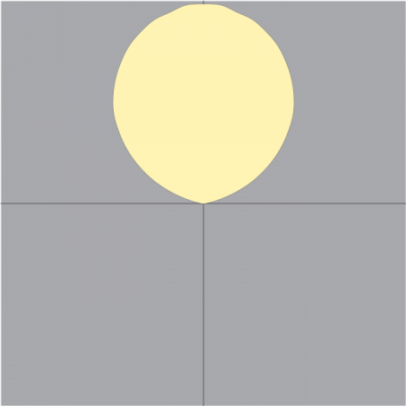

900
700
500




11
9
6

60
63
68

ENDLESS QUAD™ - SUSPENDED




DIMENSIONAL DIAGRAMS

FIXTURE
CROSS SECTION

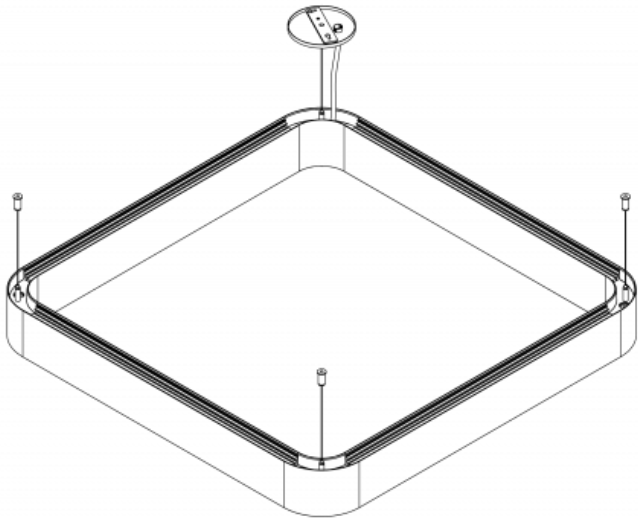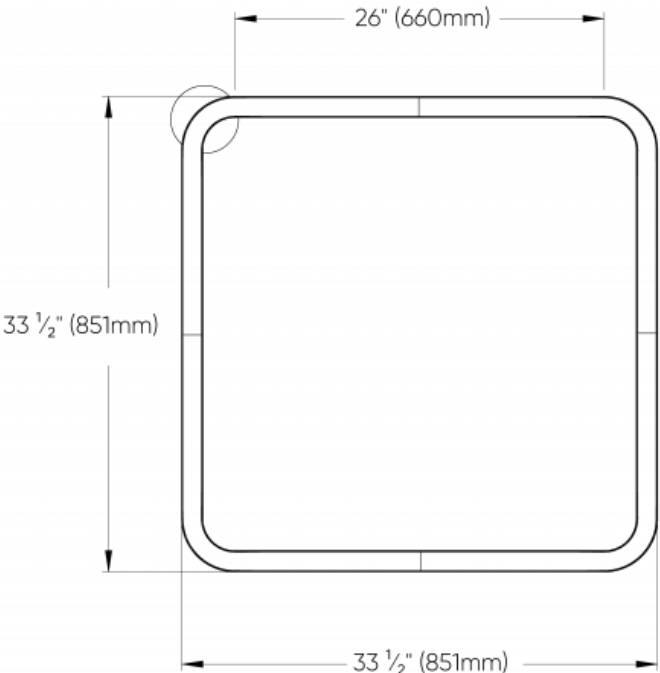

ENDLESS QUAD™ - SUSPENDED

FIXTURE
CROSS SECTION

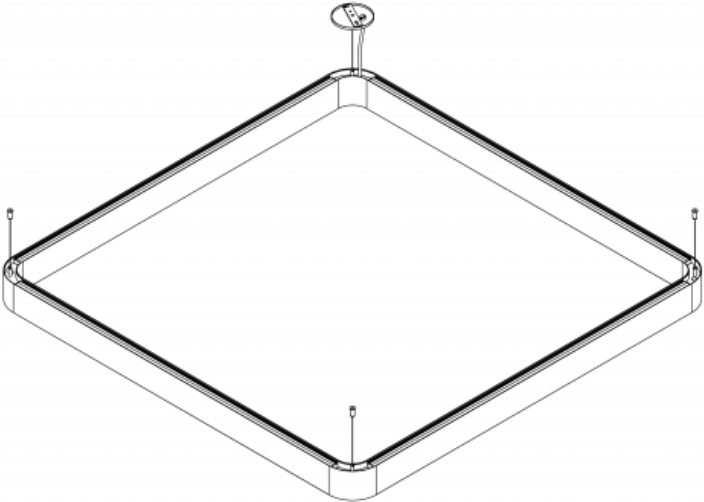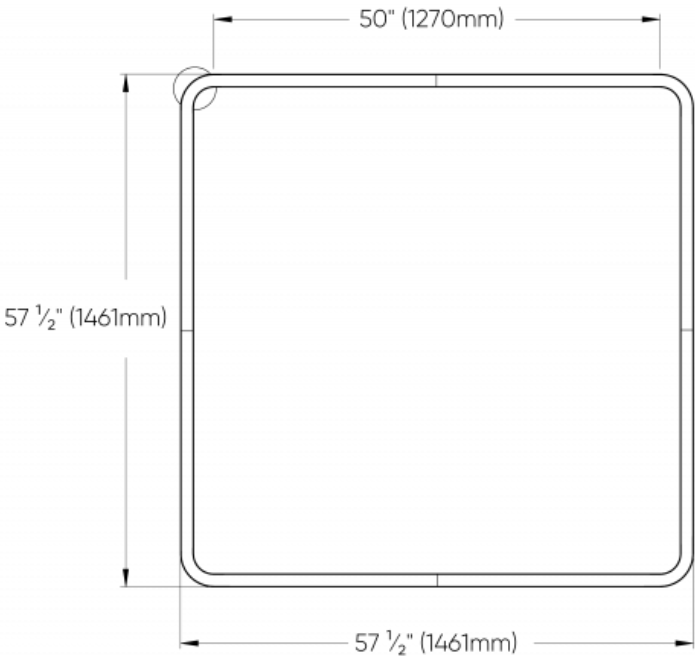

ENDLESS QUAD™ - SUSPENDED

FIXTURE
CROSS SECTION

