ERELLA™ - SUSPENDED

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ERELLA™ - SUSPENDED

GENERAL SPECIFICATION

Body and trim
Steel and aluminum.

Finish
Gear tray, powder coated gloss white. Trim, powder coated or plated as listed.

Dust covers
Clear polycarbonate.

Mechanical
Luminaires mount directly over a junction box (by others - North America only).

Suspension
Single tube with three support cables.

Lens
Acrylic.

Drivers
HPF electronic, 120/277V (EU-240V). 0-10V, 1% dimming standard.

Remote Emergency
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

L70 @25°C (77°F)
> 50,000 hrs.

OPTICS & FEATURES


Suspended Direct/Indirect


Direct-indirect

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ERELLA™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

127010 23", 12714 lms
127020 29", 15439 lms
127030 33", 19334 lms
127040 46", 30973 lms
127050 56", 38150 lms

B. CCT

30 3000K (min 80 CRI)
35 3500K (min 80 CRI)
40 4000K (min 80 CRI)

C. FINISH

WH White
BM Bronze Metallic Textured
MS Silver Metallic
AB Antique Brass
PB Polished Brass
SB Satin Brass
PC Polished Chrome
SN Satin Nickel
F39 Other painted finish (RAL number required)
F40 Other Non-RAL painted finish (sample chip required)

F39 & F40 have a one time set-up charge regardless of quantity.

D. LENS

OP Opal

E. DIMMING

DA DALI Drivers
DX DMX Drivers

F. OPTIONS

RE Remote Emergency (max distance 10ft., 120/277V)
CB Cradle Bars
SW Swivel Canopy (42 Degrees)

G. SUSPENSION LENGTHS

S1 6" additional suspension length
S2 12" additional suspension length
S3 18" additional suspension length
S4 24" additional suspension length

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ERELLA™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE

Code	127010	127020	127030	127040	127050
Power (LED)	128W	149W	170W	283W	350W
Delivered lms	12714	15439	19334	30973	38150
LPW	100	104	114	109	109
Diameter (A)	23"	29"	33"	46"	56"
Depth (D)	7"	9"	9"	12"	18"
Height (H)	17.5"	23"	23"	23"	29.5"


APPROVALS



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

ERELLA™ - SUSPENDED

DIMENSIONAL DIAGRAMS

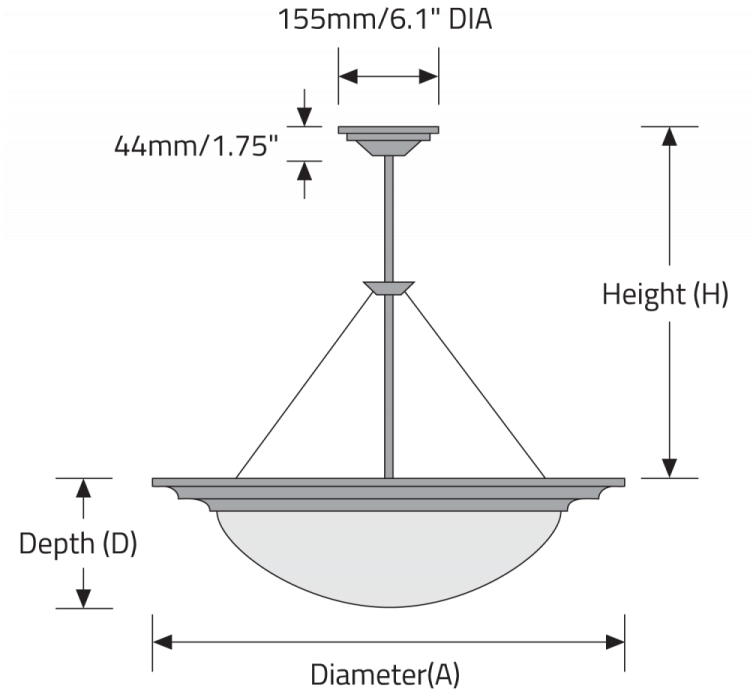

© 2026 Beta-Calco Inc. Specifications are subject to change without notice