


FIN™ - BOLLARDS

Project Name:

Fixture Type:

Fixture Code:

Quantities:

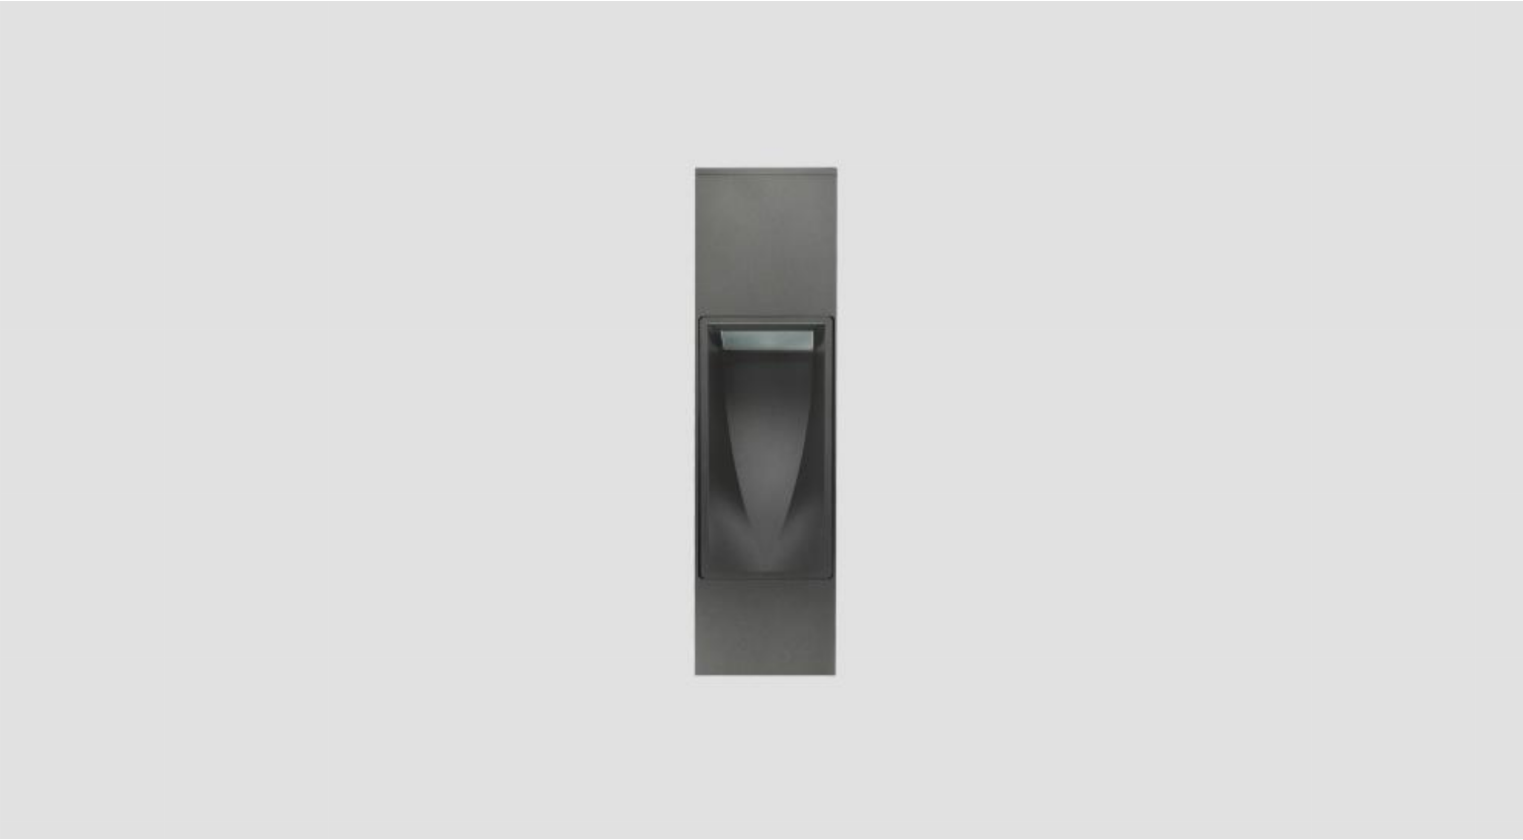

FIN™ - BOLLARDS

GENERAL SPECIFICATION

Housing

Die-cast and extruded aluminium.

External Screws

Stainless steel.

Lens

Etched glass.

Gaskets

One piece silicone.

Finish

Silver powder coated RAL9006 or black powder coated.

Drivers

HPF, electronic for 120-277V (EU-240V).

Cable entry

M20 cable gland.

Mounting

Anchorage rods required for concrete.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

MOUNTING & OPTICS



Ext-Bollards Downlight



Ext-Bollards Uplight



Assymetrical

FIN™ - BOLLARDS

HOW TO ORDER

A. LUMINAIRE

8307601 16W Down, 1215 lms

8307603 16W Up, 1215 lms

8307611 16W Down, 1215 lms

8307613 16W Up/Down, 1215 x 2 lms

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

BL Black

GR Light Gray RAL 9006

D. OPTIONS

8307699 Anchorage base for poured concrete

DB Dimming (0-10V, 10%)

TECHNICAL DATA

LUMINAIRE


Code	8307601	8307603	8307611	8307613
Power (LED)	16W Down	16W Up	16W Down	16W Up/Down
Delivered lms	1215	1215	1215	1215 x 2
LPW	76	76	76	76
Type	A	A	B	C
Weight	13.2lb	13.2lb	26.4lb	26.4lb

APPROVALS



FIN™ - BOLLARDS

DIMENSIONAL DIAGRAMS

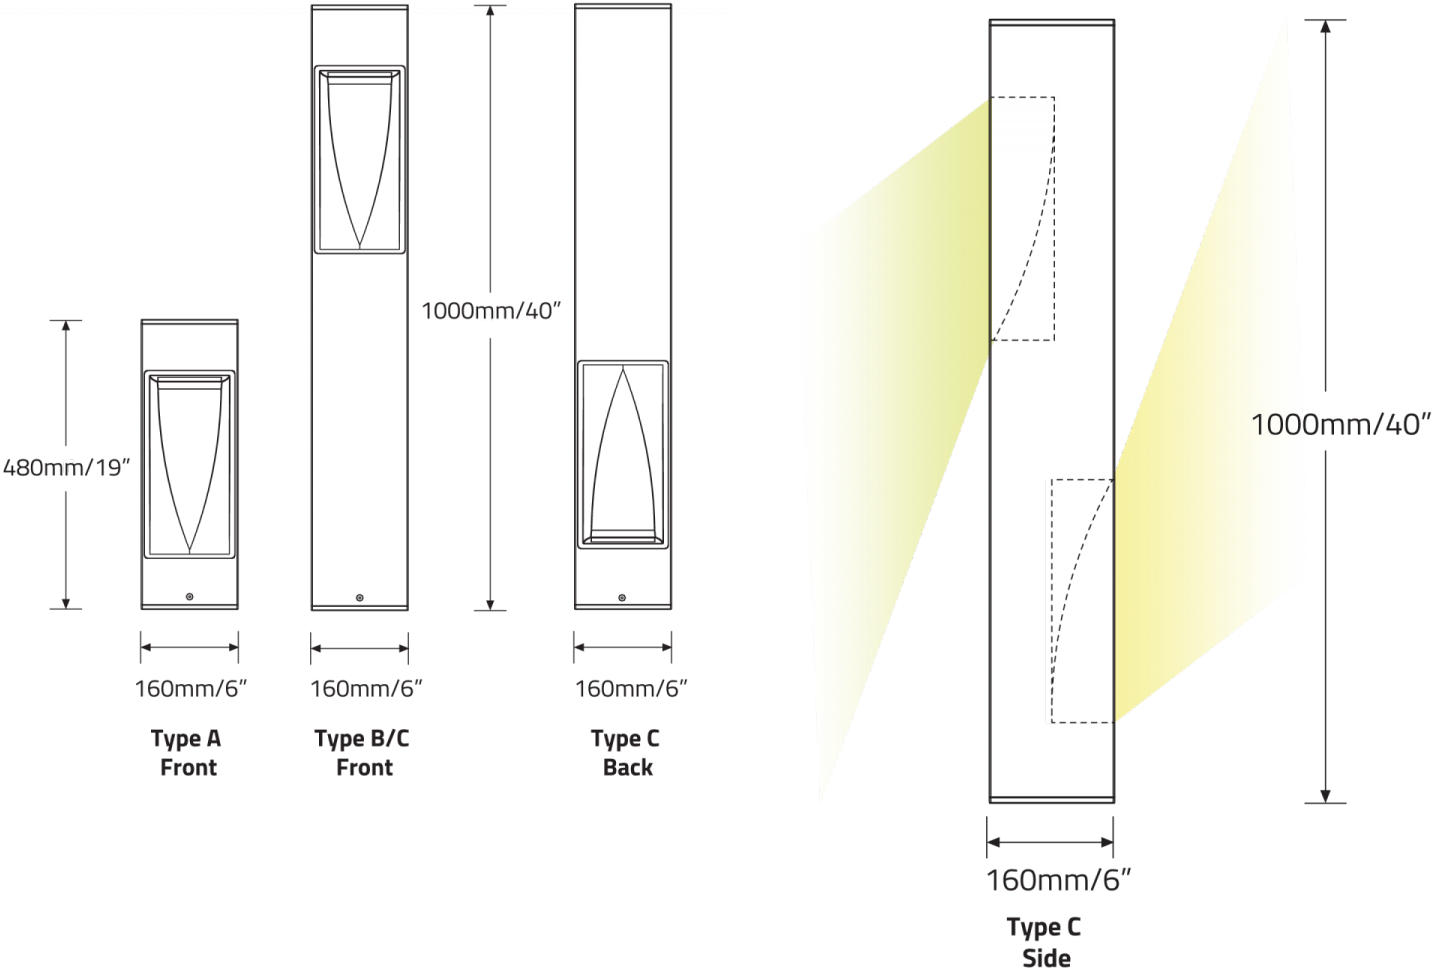

FIN™ - BOLLARDS

