

FIN™ - BOLLARDS

Project Name:

Fixture Type:

Fixture Code:

Quantities:



FIN™ - BOLLARDS

GENERAL SPECIFICATION

Housing

Die-cast and extruded aluminium.

External Screws

Stainless steel.

Lens

Etched glass.

Gaskets

One piece silicone.

Finish

Silver powder coated RAL9006 or black powder coated.

Drivers

HPF, electronic for 120-277V (EU-240V).

Cable entry

M20 cable gland.

Mounting

Anchorage rods required for concrete.

Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).


OPTICS & FEATURES



Ext-Bollards Downlight



Ext-Bollards Uplight



Assymetrical

FIN™ - BOLLARDS

HOW TO ORDER

A. LUMINAIRE

8307601 16W Down, 1215 lms

8307603 16W Up, 1215 lms

8307611 16W Down, 1215 lms

8307613 16W Up/Down, 1215 x 2 lms

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

BL Black

GR Light Gray RAL 9006

D. OPTIONS

8307699 Anchorage base for poured concrete

DB Dimming (0-10V, 10%)

TECHNICAL DATA

LUMINAIRE


| Code | 8307601 | 8307603 | 8307611 | 8307613 |
|---------------|----------------|----------------|----------------|----------------|
| Power (LED) | 16W Down | 16W Up | 16W Down | 16W Up/Down |
| Delivered lms | 1215 | 1215 | 1215 | 1215 x 2 |
| LPW | 76 | 76 | 76 | 76 |
| Type | A | A | B | C |
| Weight | 13.2lb | 13.2lb | 26.4lb | 26.4lb |

APPROVALS



FIN™ - BOLLARDS

DIMENSIONAL DIAGRAMS

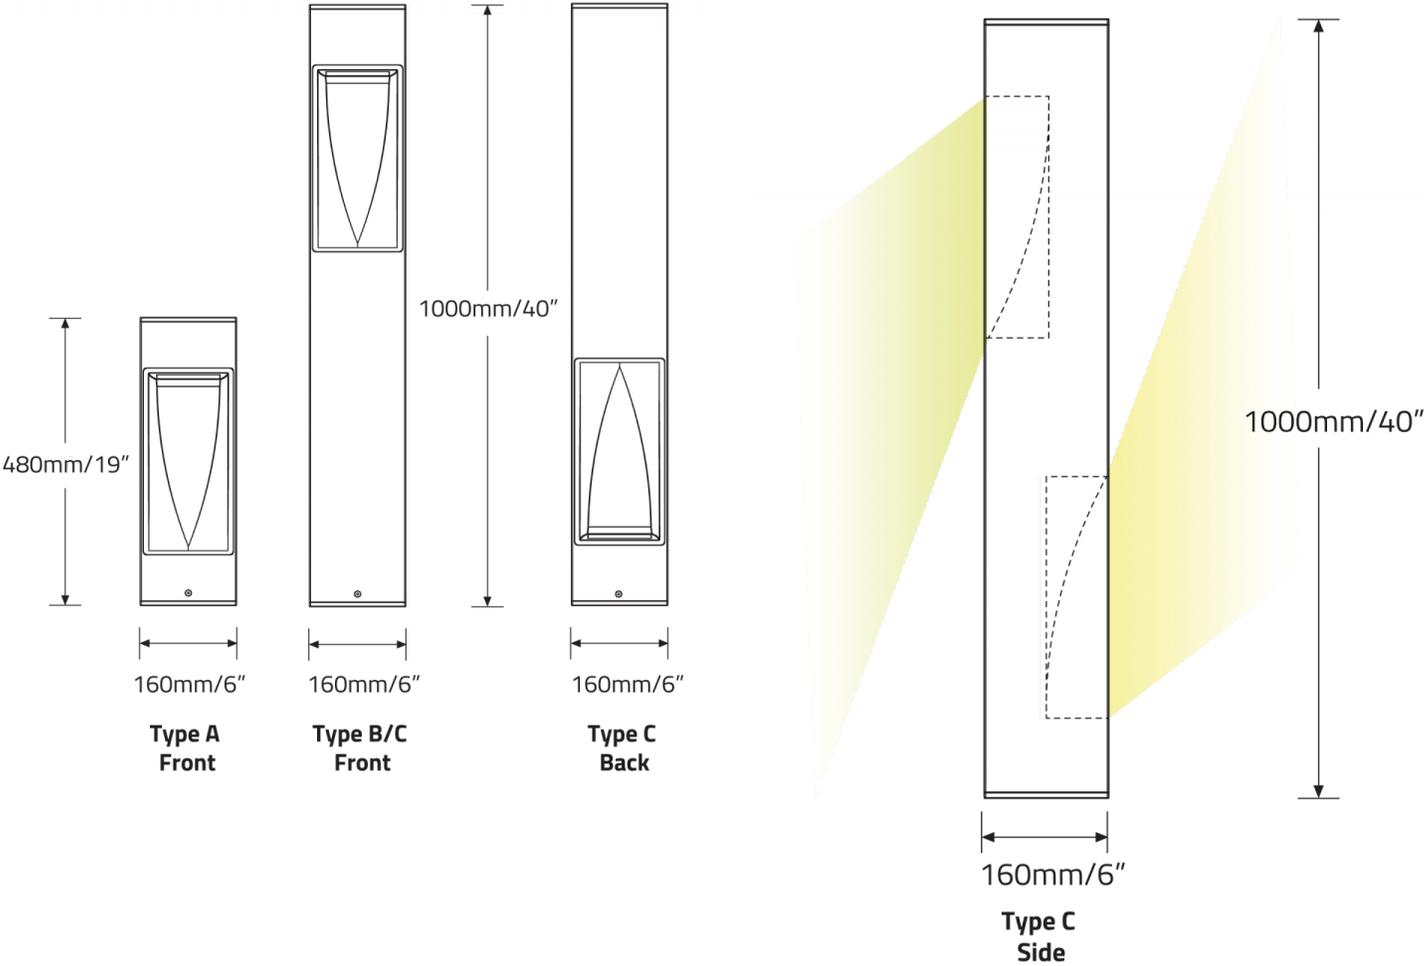

FIN™ - BOLLARDS

