

# FIN™ - BOLLARDS

Project Name:

Fixture Type:

Fixture Code:

Quantities:



# FIN™ - BOLLARDS

## GENERAL SPECIFICATION

### Housing

Die-cast and extruded aluminium.

### External Screws

Stainless steel.

### Lens

Etched glass.

### Gaskets

One piece silicone.

### Finish

Silver powder coated RAL9006 or black powder coated.

### Drivers

HPF, electronic for 120-277V (EU-240V).

### Cable entry

M20 cable gland.

### Mounting

Anchorage rods required for concrete.

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## OPTICS & FEATURES



Ext-Bollards Downlight



Ext-Bollards Uplight



Assymetrical

# FIN™ - BOLLARDS

## HOW TO ORDER

### A. LUMINAIRE

**8307601** 16W Down, 1215 lms

**8307603** 16W Up, 1215 lms

**8307611** 16W Down, 1215 lms

**8307613** 16W Up/Down, 1215 x 2 lms

### B. CCT

**30** 3000K (min 80 CRI)

**40** 4000K (min 80 CRI)

### C. FINISH

**BL** Black

**GR** Light Gray RAL 9006

### D. OPTIONS

**8307699** Anchorage base for poured concrete

**DB** Dimming (0-10V, 10%)

## TECHNICAL DATA

### LUMINAIRE


Code	<b>8307601</b>	<b>8307603</b>	<b>8307611</b>	<b>8307613</b>
Power (LED)	16W Down	16W Up	16W Down	16W Up/Down
Delivered lms	1215	1215	1215	1215 x 2
LPW	76	76	76	76
Type	A	A	B	C
Weight	13.2lb	13.2lb	26.4lb	26.4lb

## APPROVALS



# FIN™ - BOLLARDS

## DIMENSIONAL DIAGRAMS

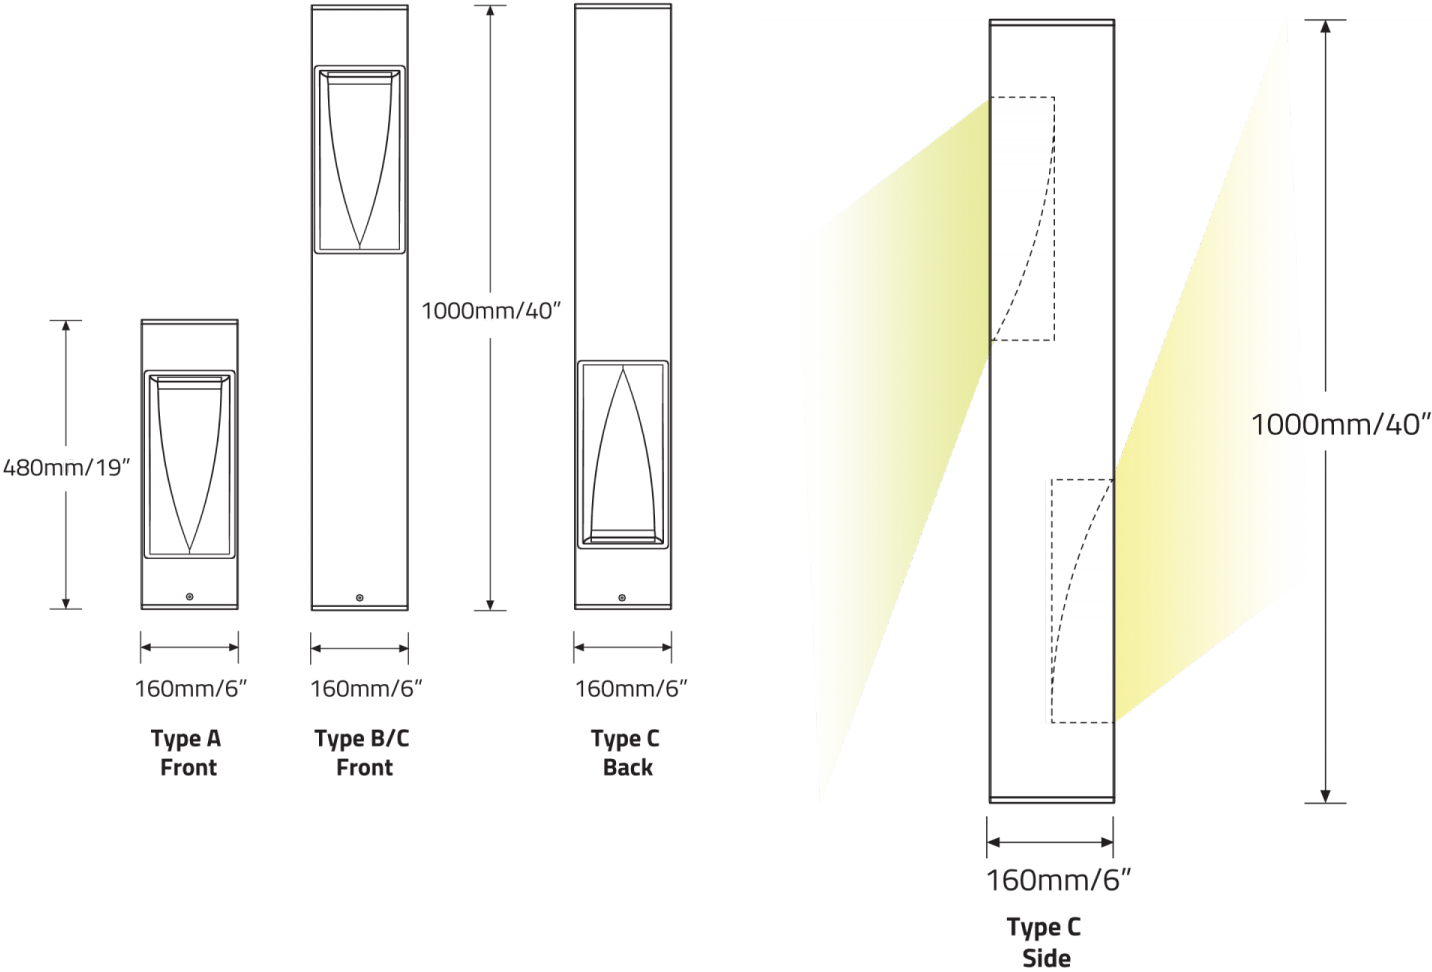

FIN™ - BOLLARDS

