FIN™ - WALL RECESSED EXTERIOR

Project Name:

Fixture Type:

Fixture Code:

Quantities:



© 2026 Beta-Calco Inc. Specifications are subject to change without notice

FIN™ - WALL RECESSED EXTERIOR

GENERAL SPECIFICATION

Housing
Die-cast and extruded aluminum.

External Screws
Stainless steel.

Lens
Etched glass.

Gaskets
One piece silicone.

Finish
Silver powder coated RAL9006 or black powder coated.

Drivers
HPF electronic 120-277V (EU-240V).

Cable entry
M20 cable gland.

Recessed housing
Die formed stainless steel.

Delivered Lumens
Delivered lumens & LPW based on 3000K (min 80 CRI).

OPTICS & FEATURES


Ext-Wall Recessed Uplight


Ext-Wall Recessed Downlight


Assymetrical

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

FIN™ - WALL RECESSED EXTERIOR

HOW TO ORDER

A. LUMINAIRE

8306501 16W LED, 1215 lms

B. CCT

30 3000K (min 80 CRI)

40 4000K (min 80 CRI)

C. FINISH

BL Black

AG Anthracite Gray

GR Light Gray (RAL 9006)

D. SPEICFY ROUGH-IN HOUSING (REQUIRED)

8306590 Rough-In Housing

E. OPTIONS

DB Dimming (0-10V, 10%, 120V only)

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

FIN™ - WALL RECESSED EXTERIOR

TECHNICAL DATA

LUMINAIRE


Code	**8306501**
Distibution	16W LED
Delivered lms	1215
LPW	76

APPROVALS

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

FIN™ - WALL RECESSED EXTERIOR

DIMENSIONAL DIAGRAMS

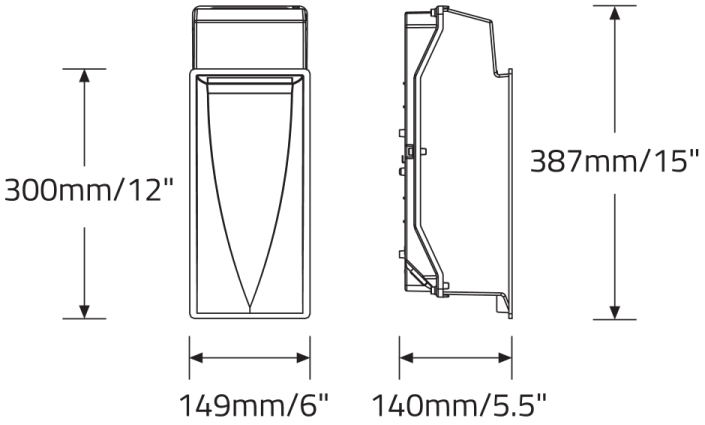

© 2026 Beta-Calco Inc. Specifications are subject to change without notice