



Project Name:	Fixture Type:
Fixture Code:	Quantities:

A. LUMINAIRE

FLDW Wall

Mounts to 2"x4" switch box (supplied by others).

B. DIAMETER

DR06 6"

C. DIRECTION

DT1 Direct 10" housing ¹DT2 Direct/Indirect 14" housing

¹ Wall mount direct only can be installed pointing up or down.
Direct will have a 10" housing
Direct/Indirect will have a 14" housing

D. LIGHT SOURCE

DN01 LEDs / Multi-Array OpticsDN02 COB / Reflector

All data based on max output and nominal values.

E. CRI

CR00 Not required (For Amber Light)CR80 CRI 80+

F. CCT

CTA27 2700KCTA30 3000KCTA35 3500KCTA40 4000K
CTA62 Amber (Turtle Friendly) ¹

¹ Available for LED Direct only with 50° direct distribution.

G. DISTRIBUTION DIRECT

BAT2 Type II ¹BAT3 Type III ¹BA03 3° ²BA15 15° ⁴
BA30 30° ⁴BA50 50° ⁴BA70 70° ³

¹ Available for Direct and LEDs / Multi-Array Optics distribution only, not recommended for Indirect use. Available with Direct lumens of 2000 and 3000, not 4000.
² Available for LEDs / Multi-Array Optics distribution. There may be a +/- 250K variance in color temperature. The head is not adjustable.
³ Available for LEDs / Multi-Array Optics distribution.
⁴ Available for LEDs / Multi-Array Optics distribution or COB / Reflector.

H. DISTRIBUTION INDIRECT

BB00 Not requiredBB03 3° ¹BB15 15° ²BB30 30° ²
BB50 50° ³BB70 70° ²

¹ Available for LEDs and Indirect only. There may be a +/- 250K variance in color temperature. The head is not adjustable.
² Available for LEDs / Multi-Array Optics distribution only.
³ Available for LEDs / Multi-Array Optics distribution and COB / Reflector.

I. LUMENS DIRECT

LMA0005 59 lms ¹	LMA0040 400 lms ²	LMA0200 2000 lms	LMA0300 3000 lms
LMA0400 4000 lms ³			

¹ Available for 3° Direct distribution.
² Available for Amber (Turtle Friendly) light.
³ Available for Direct only, 15°, 30°, 50°, and 70°.

J. LUMENS INDIRECT

LMB0000 Not required	LMB0005 59 lms ¹	LMB0200 2000 lms	LMB0300 3000 lms
-----------------------------	------------------------------------	-------------------------	-------------------------

¹ Available for 3° Indirect distribution.

K. VOLTAGE

V1 120/277V	V2 240V ¹
--------------------	-----------------------------

¹ Not available in North America

L. DIMMING

DA01 0-10V Dimming 1.0%	DA11 0-10V Dimming 1.0% - Arctic driver ^{1 3}	DA12 0-10V Dimming 1.0% - Desert driver ^{2 3}	DA21 DALI Dimming 1.0% ³
--------------------------------	---	---	--

¹ Capable of operating at -30°C (-22°F) to ambient temperature
² Capable of operating at +50°C (+122°F) ambient temperature
³ Consult factory

M. FIXTURE FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA27 Wood grain - Light Cherry ¹
FA28 Wood grain - Dark Walnut ¹	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	

¹ Longer than normal lead times may apply, consult factory.


N. BEZEL FINISH

FB01 White	FB02 Black Metallic - Textured	FB20 Silver Metallic - Textured	FB46 Charcoal Metallic - Textured
FB47 Bronze Metallic - Textured			

Shatterproof lens available, consult factory.

DIMENSIONAL DIAGRAMS

6"- Full-Size Fluid Wall Mount Direct-Indirect Only

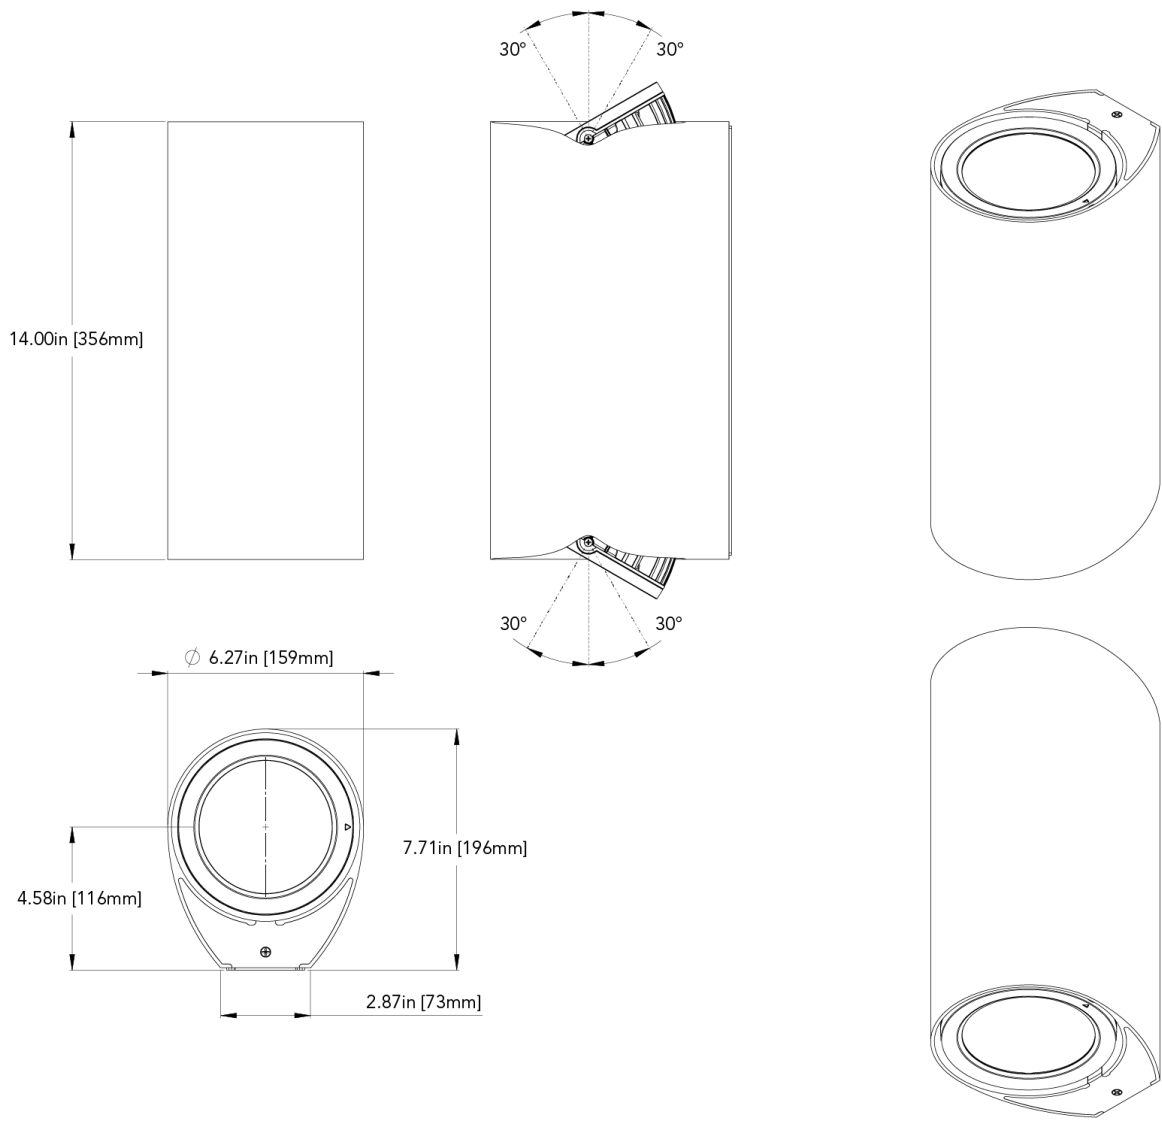

6"- Fluid Wall Mount Direct or Indirect only

