

FLUTE™ - CONTINUOUS

Project Name:


Fixture Type:

Fixture Code:

Quantities:



FLUTE™ - CONTINUOUS

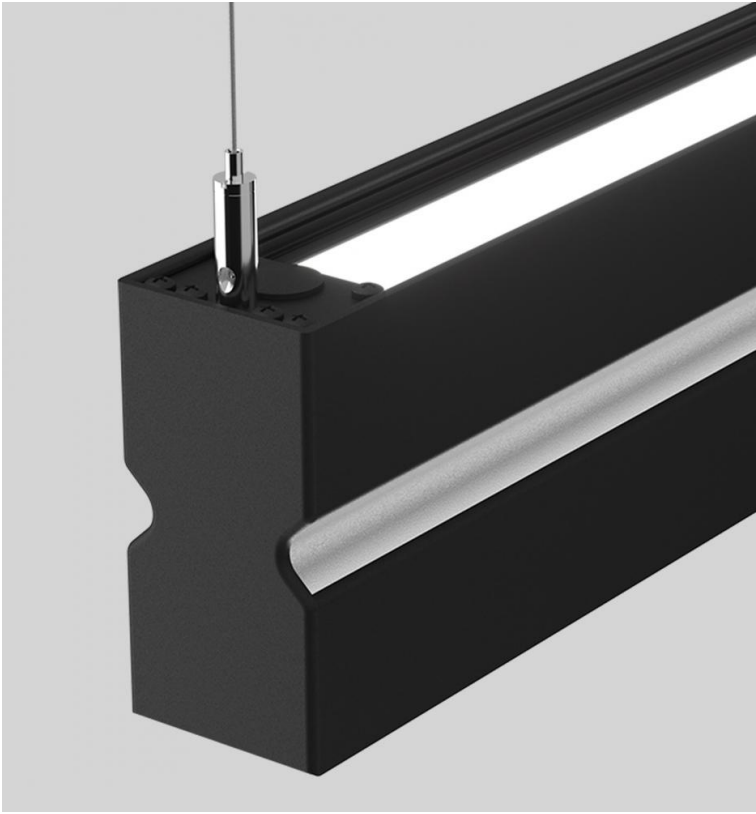

FLUTE™ - CONTINUOUS

FLUTE's shape shifts the traditional block form factor into a cutting-edge cyber style. The fluting along the flank emits a side glow that radiates an electrifying detail and provides a lightweight appearance to an already compact form factor. The hourglass contour jacks up profile design with an aerodynamic quality. **FLUTE** is the optimal complement for tech-age modern design and interiors with intricate detailing.

GENERAL SPECIFICATION

Body

Aluminum.

Power cable

Silver braided.

Mechanical

Align N' Lock™ joiner ensures zero light leak and a simple installation.

Luminaires mount directly over J box (by others).

PoE

Can be integrated into your data network via Power over Ethernet connectivity.

Remote emergency

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Drivers

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

Reported L70 @25 °C (77 °F)

>108000 hrs @3000 lms/ft (9800 lm/m)

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 80+

Designed by

Serge Cornelissen.

Finish

Powder coated.

Suspension

Steel cables.

Diffuser

Opal acrylic. Supplied with a seamless roll (up to 24ft), to be trimmed and installed in the field.

BIOS

For circadian lighting, consult factory.

Sensors

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

Tunable White

Tunable white available, consult factory.

Estimated L70 @25 °C (77 °F)

>196000 hrs @3000 lms/ft (9800 lm/m)


Approvals

Damp Rated.


Design

US Pat. No. D967,491 US Pat. No. D969,389

MOUNTING & OPTICS




Suspended Direct




Suspended Direct/Indirect




Direct DD2




Direct DD4



Indirect UD1



Indirect UD3



Declare



PoE



FLUTE™ - CONTINUOUS

HOW TO ORDER

A. LUMINAIRE

FLUP1P Direct

FLUP2P Direct/Indirect

Data shown based on max values, consult Performance Data download for more details. Non Illuminated Reveal versions available, consult factory for details. One power cord for every 50 linear feet.

B. LENGTH OF RUN

SFA _ _ _ _

Minimum length to order is 4ft and orders to be in 2ft increments. For 6 inch increments, consult factory.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

C. MAX LENGTH PER SECTION

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

D. LM/FT (DIRECT)

LPF020 200 lm/ft

LPF040 400 lm/ft

LPF060 600 lm/ft

LPF080 800 lm/ft

LPF100 1000 lm/ft

LPF120 1200 lm/ft

LPF140 1400 lm/ft

E. LM/FT (INDIRECT)

LPG000 Not required

LPG020 200 lm/ft

LPG040 400 lm/ft

LPG060 600 lm/ft

LPG080 800 lm/ft

LPG100 1000 lm/ft

LPG120 1200 lm/ft

LPG140 1400 lm/ft

LPG165 1650 lm/ft

F. CRI

CR80 CRI 80+

CR90 CRI 90+

G. CCT - DIRECT

CTA30 3000K

CTA35 3500K

CTA40 4000K

H. CCT - INDIRECT

CTB00 Not required

CTB30 3000K

CTB35 3500K

CTB40 4000K

I. DIRECT DIFFUSER

DD2 Batwing

DD4 Comfort

J. INDIRECT DIFFUSER

UD0 Not required

UD1 Batwing

UD3 Asymmetric ¹

¹ Available up to 1200 lms/ft.

FLUTE™ - CONTINUOUS

K. UPLIGHT BLACKOUT PLATE

UB00 Not required **UB_ _** Blackout plate ¹

¹ Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.

L. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ V2 not available in North America.

² V3 available with DA01 dimming only.

³ V4 available with DA45 dimming only.

M. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

N. CEILING TYPE

G1 Grid ceiling ¹ **H1** Hard ceiling ²

¹ Combo kit includes installation to T-bar and through tile mount.

² Designed for drywall ceilings.

O. SUSPENSION

HLA03 3ft cable suspension **HLA06** 6ft cable suspension **HLA09** 9ft cable suspension

Special order available on lengths over 10ft and may be subject to longer lead times, consult factory.

P. FIXTURE FINISH

FA01 White **FA02** Black Metallic - Textured **FA20** Silver Metallic - Textured **FA25** Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹ **FA28** Wood grain - Dark Walnut ¹ **FA44** Midnight Blue Metallic - Textured **FA45** Copper Metallic
FA46 Charcoal Metallic - Textured **FA47** Bronze Metallic - Textured **FA52** Champagne Metallic **FA53** Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

Q. CANOPY FINISH

CF01 White **CF02** Black Metallic - Textured **CF20** Silver Metallic - Textured **CF25** Gold Metallic - Textured
CF44 Midnight Blue Metallic - Textured **CF45** Copper Metallic **CF46** Charcoal Metallic - Textured **CF47** Bronze Metallic - Textured
CF52 Champagne Metallic **CF53** Red Metallic - Textured

R. EMERGENCY

E0 Not required **E1** Emergency system - Integral ¹ **E3** Emergency generated circuit ¹

¹ A drawing will be required at the time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.



FLUTE™ - CONTINUOUS

S. CIRCUITS

CS1 Single circuit

CS2 Dual circuit ¹

CS4 Emergency generated circuit ¹

¹ Only required if ordering Emergency system.

T. SENSORS



FLUTE™ - CONTINUOUS


TECHNICAL DATA

LUMINAIRE

Data shown based on max values, consult Performance Data download for more details. Non Illuminated Reveal versions available, consult factory for details.
 One power cord for every 50 linear feet.

Code	FLUP1P	FLUP2P
Light Direction	Direct	Direct/Indirect
Lms/Ft Direct	1400	1400
Lms/ft Indirect		1650
Watts/Ft Direct	13	13
Watts/Ft Indirect		13
LPW Direct	133	133
LPW Indirect		168


FIXTURE FINISH

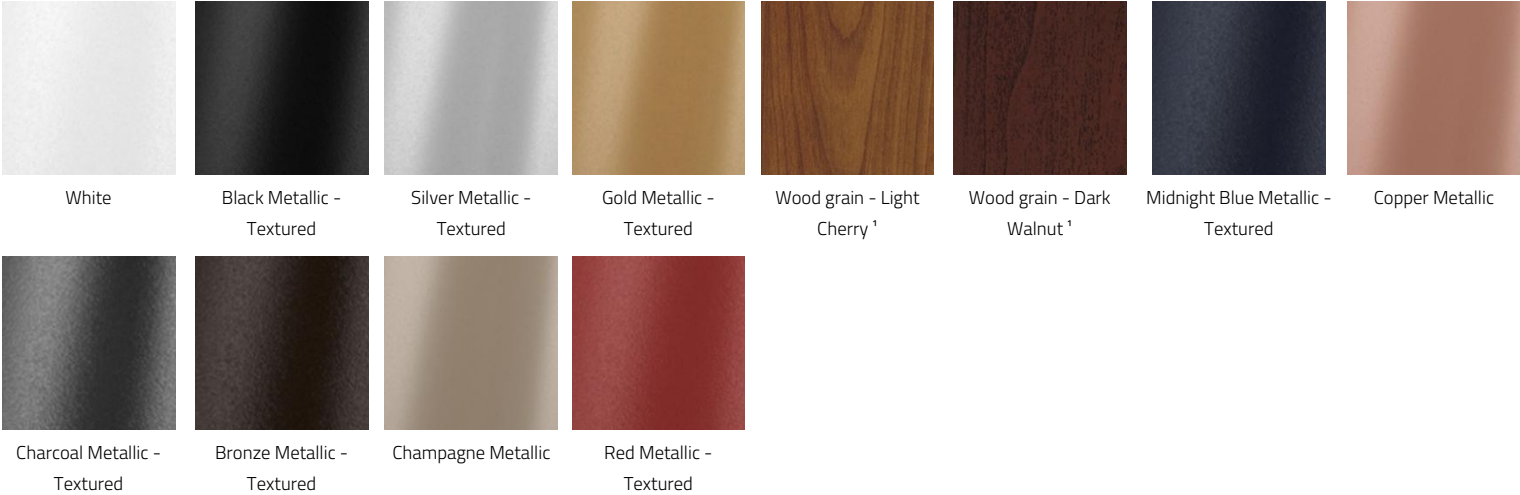

¹ Longer than normal lead times may apply, consult factory.

FLUTE™ - CONTINUOUS

CANOPY FINISH

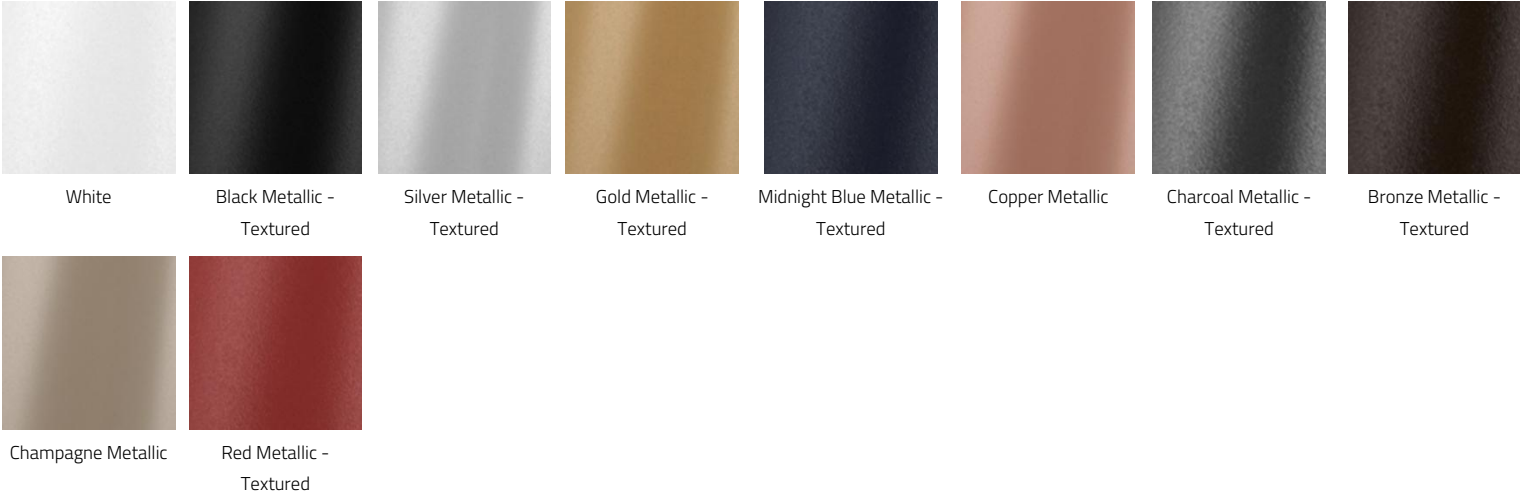

APPROVALS



FLUTE™ - CONTINUOUS


PERFORMANCE DATA

DIRECT COMFORT DIFFUSER (WITH SIDE REVEAL) (DD4)

LUMEN/FT

WATT/FT

LPW

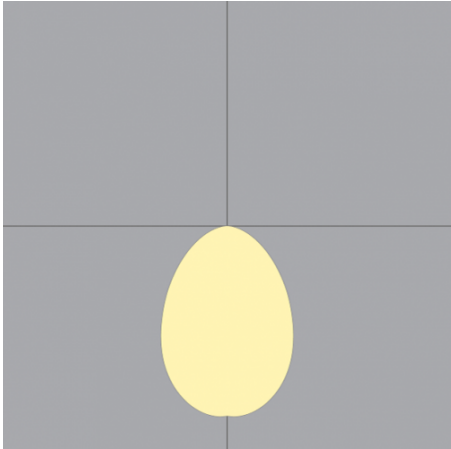

1400
1200
1000
800
600
400
200

13
11
9
7
5
3
2


107
110
113
116
121
126
133

INDIRECT BATWING (UD1)

LUMEN/FT

WATT/FT

LPW

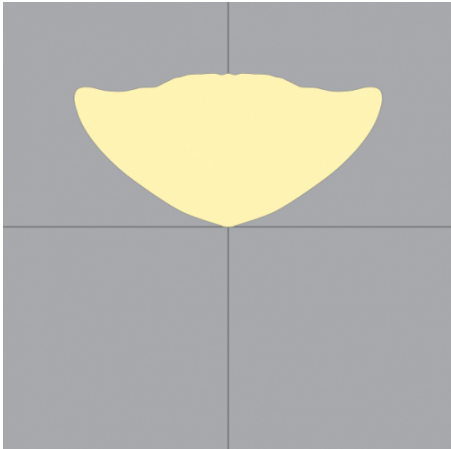

1650
1400
1000
800
600
400
200

13
11
9
7
6
4
3
1


134
138
142
146
150
155
161
168

INDIRECT ASYMMETRIC (UD3)

LUMEN/FT

WATT/FT

LPW

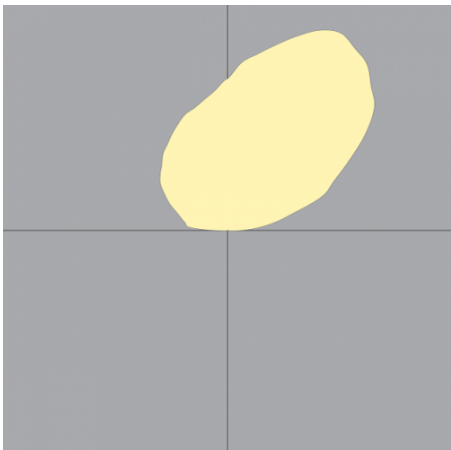

1200
1000
800
600
400
200

13
10
9
6
4
2

97
100
102
107
109
112

FLUTE™ - CONTINUOUS

DIMENSIONAL DIAGRAMS

