




# FLUTE™

## SHORT SPECIFICATION SHEET

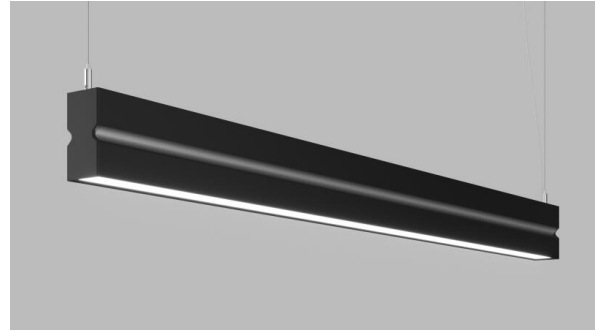

Fixture Type

Fixture Code

Quantities

### 1 HOW TO ORDER

#### 1. LUMINAIRE

**FLUP1P** Direct

**FLUP2P** Direct/Indirect

Data shown based on max values, consult Performance Data download for more details. Non Illuminated Reveal versions available, consult factory for details.

One power cord for every 50 linear feet.

#### 2. LENGTH OF RUN

Minimum length to order is 4ft and orders to be in 2ft increments. For 6 inch increments, consult factory.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

**SFA\_ \_ \_ \_**

Minimum length to order is 4ft and orders to be in 2ft increments. For 6 inch increments, consult factory.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

### 3. MAX LENGTH PER SECTION

<b>SL04</b> 4ft	<b>SL06</b> 6ft	<b>SL08</b> 8ft	<b>SL10</b> 10ft
<b>SL12</b> 12ft			

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

### 4. LM/FT (DIRECT)

<b>LPF020</b> 200 lm/ft	<b>LPF040</b> 400 lm/ft	<b>LPF060</b> 600 lm/ft	<b>LPF080</b> 800 lm/ft
<b>LPF100</b> 1000 lm/ft	<b>LPF120</b> 1200 lm/ft	<b>LPF140</b> 1400 lm/ft	

### 5. LM/FT (INDIRECT)

<b>LPG000</b> Not required	<b>LPG020</b> 200 lm/ft	<b>LPG040</b> 400 lm/ft	<b>LPG060</b> 600 lm/ft
<b>LPG080</b> 800 lm/ft	<b>LPG100</b> 1000 lm/ft	<b>LPG120</b> 1200 lm/ft	<b>LPG140</b> 1400 lm/ft
<b>LPG165</b> 1650 lm/ft			

### 6. CRI

<b>CR80</b> CRI 80+	<b>CR90</b> CRI 90+
---------------------	---------------------

### 7. CCT – DIRECT

<b>CTA27</b> 2700K	<b>CTA30</b> 3000K	<b>CTA35</b> 3500K	<b>CTA40</b> 4000K
--------------------	--------------------	--------------------	--------------------

### 8. CCT – INDIRECT

<b>CTB00</b> Not required	<b>CTB27</b> 2700K	<b>CTB30</b> 3000K	<b>CTB35</b> 3500K
<b>CTB40</b> 4000K			

### 9. DIRECT DIFFUSER

<b>DD2</b> Batwing	<b>DD4</b> Comfort
--------------------	--------------------

### 10. INDIRECT DIFFUSER

<b>UD0</b> Not required	<b>UD1</b> Batwing	<b>UD3</b> Asymmetric <sup>1</sup>
-------------------------	--------------------	------------------------------------

<sup>1</sup> Available up to 1200 lms/ft.

### 11. UPLIGHT BLACKOUT PLATE

<b>UB00</b> Not required	<b>UB_ _</b> Blackout plate <sup>1</sup>
--------------------------	--

<sup>1</sup> Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.

## 12. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

**V4** Low Voltage <sup>3</sup>

<sup>1</sup> V2 not available in North America.

<sup>2</sup> V3 available with DA01 dimming only.

<sup>3</sup> V4 available with DA45 dimming only.

## 13. DIMMING

**DA01** 0–10V Dimming 1.0%

**DA02** 0–10V Dimming 0.1% <sup>1</sup>

**DA20** DALI Dimming 0.1% <sup>1</sup>

**DA21** DALI Dimming 1.0% <sup>1</sup>

**DA30** DSI/switchDim <sup>2</sup>

**DA45** PoE <sup>3</sup>

<sup>1</sup> Not available with V3.

<sup>2</sup> Not available in North America.

<sup>3</sup> Only available with V4.

## 14. CEILING TYPE

**G1** Grid ceiling <sup>1</sup>

**H1** Hard ceiling <sup>2</sup>

<sup>1</sup> Combo kit includes installation to T-bar and through tile mount.

<sup>2</sup> Designed for drywall ceilings.

## 15. SUSPENSION

**HLA03** 3ft cable suspension

**HLA06** 6ft cable suspension

**HLA09** 9ft cable suspension

Special order available on lengths over 10ft and may be subject to longer lead times, consult factory.

## 16. FIXTURE FINISH

**FA01** White

**FA02** Black Metallic – Textured

**FA20** Silver Metallic – Textured

**FA25** Gold Metallic – Textured

**FA27** Wood grain – Light Cherry <sup>1</sup>

**FA28** Wood grain – Dark Walnut

**FA44** Midnight Blue Metallic –  
Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic –  
Textured

**FA47** Bronze Metallic – Textured

**FA52** Champagne Metallic

**FA53** Red Metallic – Textured

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## 17. CANOPY FINISH

<b>CF01</b> White	<b>CF02</b> Black Metallic – Textured	<b>CF20</b> Silver Metallic – Textured	<b>CF25</b> Gold Metallic – Textured
<b>CF44</b> Midnight Blue Metallic – Textured	<b>CF45</b> Copper Metallic	<b>CF46</b> Charcoal Metallic – Textured	<b>CF47</b> Bronze Metallic – Textured
<b>CF52</b> Champagne Metallic	<b>CF53</b> Red Metallic – Textured		

## 18. EMERGENCY

<b>E0</b> Not required	<b>E1</b> Emergency system – Integral <sup>1</sup>	<b>E3</b> Emergency generated circuit <sup>1</sup>
------------------------	--	--

<sup>1</sup> A drawing will be required at the time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

## 19. CIRCUITS

<b>CS1</b> Single circuit	<b>CS2</b> Dual circuit <sup>1</sup>	<b>CS4</b> Emergency generated circuit <sup>1</sup>
---------------------------	--------------------------------------	---

<sup>1</sup> Only required if ordering Emergency system.

## 20. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.