

FLUTE™ - CONTINUOUS RECESSED

Project Name:


Fixture Type:

Fixture Code:

Quantities:



FLUTE™ - CONTINUOUS RECESSED

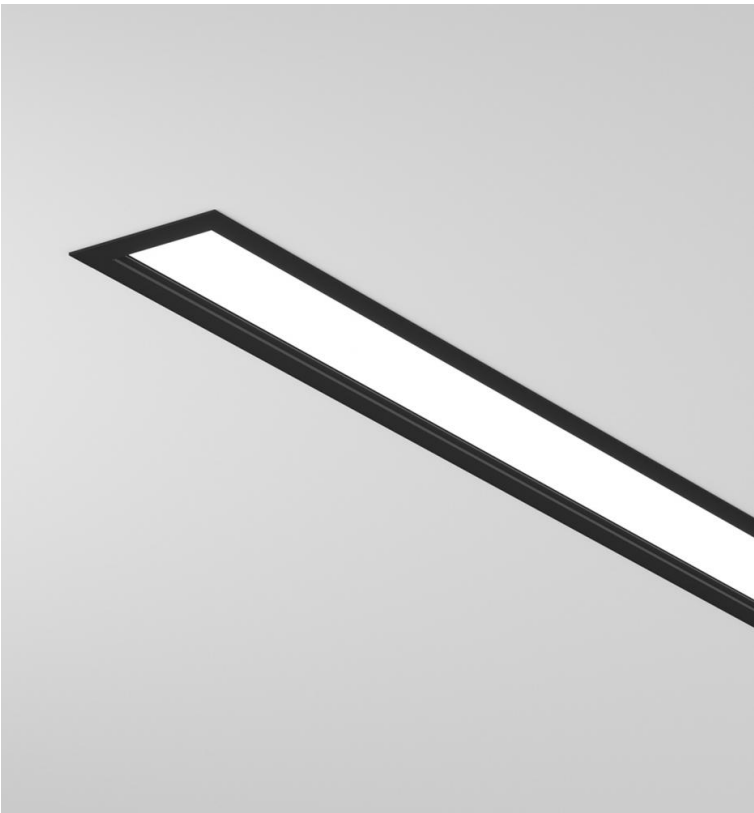

FLUTE™ - CONTINUOUS RECESSED

With a lens only 2" in width, **FLUTE** is our narrowest linear recessed yet. **FLUTE** Recessed offers a slimline aesthetic that does not compromise on performance and delivers up to 135 lumens per watt. Standalone lengths up to 12' are available, as well as continuous runs up to 50' on a single circuit. Use a combination of lengths to create digital-age design effects on the ceiling or long lines of light for ambient illumination or wayfinding.

GENERAL SPECIFICATION

Body

Aluminum.

PoE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

Diffuser

Opal acrylic. Supplied with a seamless roll (up to 24ft), to be trimmed and installed in the field.

Reported L70 @25°C (77°F)

>108000 hrs @1400 lms/ft (4600 lm/m)

Remote emergency

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Tunable White

Tunable White range from 2700K to 6500K is available; contact the factory for details.

Design

US Pat. No. D967,491 US Pat. No. D969,389

Finish

Powder coated.

BIOS

For circadian lighting, consult factory.

Drivers

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

Estimated L70 @25°C (77°F)

>196000 hrs @1400 lms/ft (4600 lm/m)


Delivered lumens

Delivered lumens & LPW based on 4000K CRI 80+

Approvals

Damp Rated.


MOUNTING & OPTICS




Recessed



Direct DD2



Direct DD4



Declare



PoE

FLUTE™ - CONTINUOUS RECESSED

HOW TO ORDER

A. LUMINAIRE

BLFR2R Direct

Data shown based on max values, consult Performance Data download for more details. One power cord for every 50 linear feet.

B. LENGTH OF RUN

SFG _ _ _ _

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFG0400

Example: 10ft = SFG1000

Example: 50ft = SFG5000

For runs over 50ft in length, consult factory.

C. MAX LENGTH PER SECTION

SL04 4ft	SL06 6ft	SL08 8ft	SL10 10ft
SL12 12ft			

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required, the longest available segment is 12ft and the run would consist of three 12ft segments and one 4ft. For special requirements, please contact sales@betacalco.com.

D. LUMENS/FT

LPF020 200 lm/ft	LPF040 400 lm/ft	LPF060 600 lm/ft	LPF080 800 lm/ft
LPF100 1000 lm/ft	LPF120 1200 lm/ft	LPF140 1400 lm/ft	

E. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

F. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

G. DIFFUSER

DD2 Batwing diffuser	DD4 Comfort Lens
-----------------------------	-------------------------

Supplied with a seamless roll (up to 24ft), to be trimmed and installed in the field.

H. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ V2 not available in North America.

² V3 available with DA01 dimming only.

³ V4 available with DA45 dimming only.

FLUTE™ - CONTINUOUS RECESSED

I. DIMMING

DA01 0-10V Dimming 1.0%
DA30 DSI/switchDim²

DA02 0-10V Dimming 0.1%¹
DA45 PoE³

DA20 DALI Dimming 0.1%¹

DA21 DALI Dimming 1.0%¹

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

J. CEILING TYPE & TRIM

RT1 Tegular ceiling¹

RT2 T-Bar ceiling²

RT3 Trimless³

RT4 Trim³

¹ Fixture designed to fit into a 9/16" or 15/16" standard tegular grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

² Fixture designed to fit into a 9/16" or 15/16" standard grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

³ Fixture designed for drywall and concrete ceilings.

K. CEILING TRIM FINISH

FA00 Not required

FA01 White¹

FA02 Black Metallic - Textured¹

¹ Required for RT4 only.

L. EMERGENCY

E0 Not required

E1 Emergency system - Integral¹

¹ A drawing will be required at the time of ordering to determine the required number and location of the emergency sections. ¹ Available upon request, consult factory for details. Not available with 347V.

M. CHICAGO PLENUM

CPO Not required

CP1 Chicago Plenum



FLUTE™ - CONTINUOUS RECESSED

TECHNICAL DATA

LUMINAIRE

Data shown based on max values, consult Performance Data download for more details. One power cord for every 50 linear feet.

Code	BLFR2R
Light Direction	Direct
Lms/Ft	1400
Watts/Ft	13
LPW	135


CEILING TRIM FINISH



Not required



White¹



Black Metallic - Textured¹

¹ Required for RT4 only.


APPROVALS



FLUTE™ - CONTINUOUS RECESSED

PERFORMANCE DATA

DIRECT COMFORT (DD4)

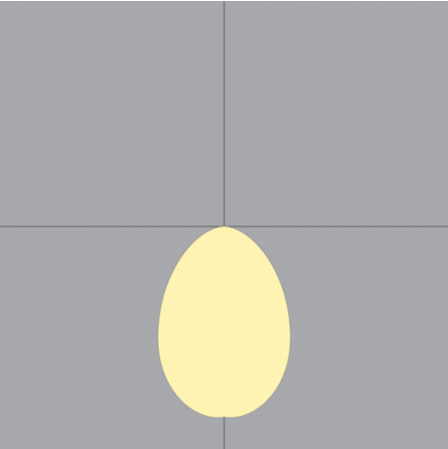

LUMEN/FT

1400
1200
1000
800
600
400
200

WATT/FT

13
11
9
7
5
3
2


LPW

109
112
115
118
123
128
135


FLUTE™ - CONTINUOUS RECESSED

DIMENSIONAL DIAGRAMS


Grid Ceiling - Tegular ceiling

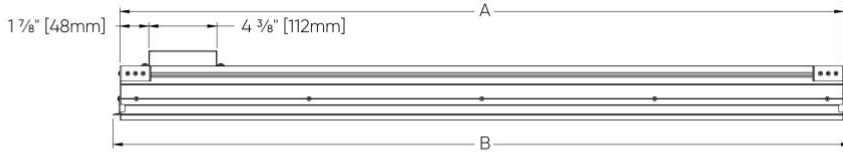


Max Length (Per section)	A	B
4ft	46 13/16" [1189mm]	47 11/16" [1212mm]
6ft	70 13/16" [1791mm]	71 11/16" [1821mm]
8ft	94 13/16" [2408mm]	95 11/16" [2431mm]
10ft	118 13/16" [3018mm]	119 11/16" [3040mm]
12ft	142 13/16" [3627mm]	143 11/16" [3650mm]




Grid Ceiling - T-bar ceiling

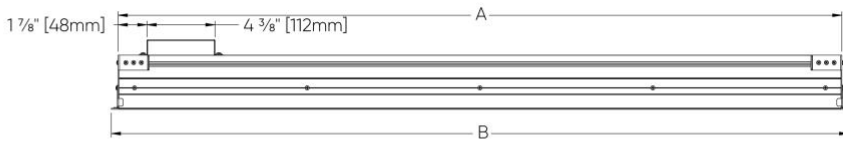


Max Length (Per section)	A	B
4ft	46 13/16" [1189mm]	47 11/16" [1212mm]
6ft	70 13/16" [1791mm]	71 11/16" [1821mm]
8ft	94 13/16" [2408mm]	95 11/16" [2431mm]
10ft	118 13/16" [3018mm]	119 11/16" [3040mm]
12ft	142 13/16" [3627mm]	143 11/16" [3650mm]




Hard Ceiling - Trimless

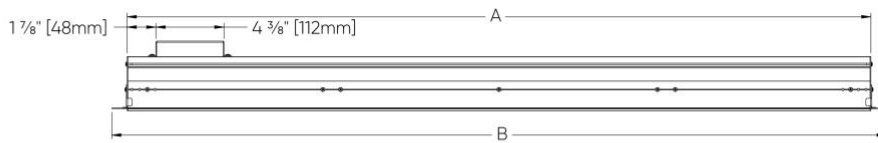

Max Length (Per section)	A	B
4ft	48 1/8" [1222mm]	50 1/8" [1273mm]
6ft	72 1/8" [1831mm]	74 1/8" [1882mm]
8ft	96 1/8" [2431mm]	98 1/8" [2492mm]
10ft	120 1/8" [3050mm]	122 1/8" [3040mm]
12ft	144 1/8" [3660mm]	146 1/8" [3711mm]



Hard Ceiling - Trim

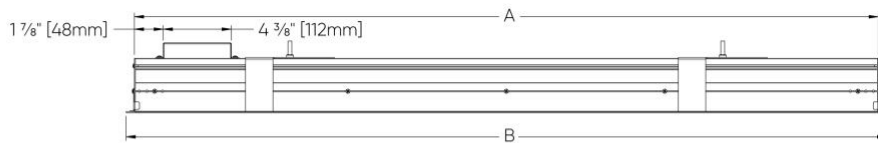

Max Length (Per section)	A	B
4ft	48 1/8" [1222mm]	50 1/8" [1273mm]
6ft	72 1/8" [1831mm]	74 1/8" [1882mm]
8ft	96 1/8" [2431mm]	98 1/8" [2492mm]
10ft	120 1/8" [3050mm]	122 1/8" [3040mm]
12ft	144 1/8" [3660mm]	146 1/8" [3711mm]

