




FLUTE™

FULL SPECIFICATION SHEET

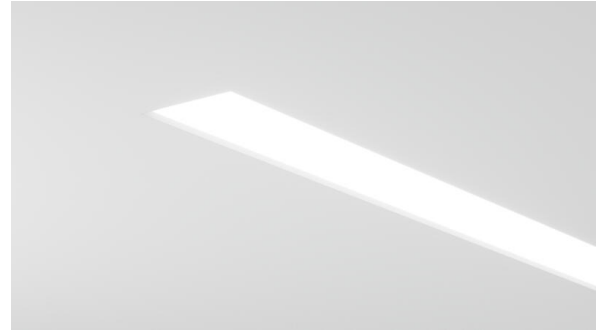

Fixture Type

Fixture Code

Quantities


1 DESCRIPTION

With a lens only 2" in width, **FLUTE** is our narrowest linear recessed yet. **FLUTE** Recessed offers a slimline aesthetic that does not compromise on performance and delivers up to 135 lumens per watt. Standalone lengths up to 12' are available, as well as continuous runs up to 50' on a single circuit. Use a combination of lengths to create digital-age design effects on the ceiling or long lines of light for ambient illumination or wayfinding.


2 OPTICS & FEATURES



Recessed



Direct DD2



Direct DD4



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminum.

FINISH

Powder coated.

POE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

BIOS

For circadian lighting, consult factory.

DIFFUSER

Opal acrylic. Supplied with a seamless roll (up to 24ft), to be trimmed and installed in the field.

REPORTED L70 @25°C (77°F)

>108000 hrs @1400 lms/ft (4600 lm/m)

REMOTE EMERGENCY

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

TUNABLE WHITE

Tunable White range from 2700K to 6500K is available; contact the factory for details.

DESIGN

US Pat. No. D967,491 US Pat. No. D969,389

DRIVERS

HPF electronic drivers for 120–277V, 347V (EU–240V). The driver is integral to the fixture housing.

ESTIMATED L70 @25°C (77°F)

>196000 hrs @1400 lms/ft (4600 lm/m)

DELIVERED LUMENS


Delivered lumens & LPW based on 4000K CRI 80+

APPROVALS


Damp Rated.

5 DESIGN OPTIONS

CEILING TRIM FINISH



Not required



White ¹



Black
Metallic –
Textured ¹

¹ Required for RT4 only.

6 HOW TO ORDER

1. LUMINAIRE

BLFR2R Direct

Data shown based on max values, consult Performance Data download for more details. One power cord for every 50 linear feet.

2. LENGTH OF RUN

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFG0400

Example: 10ft = SFG1000

Example: 50ft = SFG5000

For runs over 50ft in length, consult factory.

SFG_ _ _ _

Minimum length to order is 4ft and orders to be in 2ft increments.

Example: 4ft = SFG0400

Example: 10ft = SFG1000

Example: 50ft = SFG5000

For runs over 50ft in length, consult factory.

3. MAX LENGTH PER SECTION

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required, the longest available segment is 12ft and the run would consist of three 12ft segments and one 4ft. For special requirements, please contact sales@betacalco.com.

4. LUMENS/FT

LPF020 200 lm/ft

LPF040 400 lm/ft

LPF060 600 lm/ft

LPF080 800 lm/ft

LPF100 1000 lm/ft

LPF120 1200 lm/ft

LPF140 1400 lm/ft

5. CRI

CR80 CRI 80+

CR90 CRI 90+

6. CCT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

7. DIFFUSER

DD2 Batwing diffuser **DD4** Comfort Lens

Supplied with a seamless roll (up to 24ft), to be trimmed and installed in the field.

8. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ V2 not available in North America.

² V3 available with DA01 dimming only.

³ V4 available with DA45 dimming only.

9. DIMMING

DA01 0–10V Dimming 1.0% **DA02** 0–10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

10. CEILING TYPE & TRIM

RT1 Tegular ceiling ¹ **RT2** T-Bar ceiling ² **RT3** Trimless ³ **RT4** Trim ³

¹ Fixture designed to fit into a 9/16" or 15/16" standard tegular grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

² Fixture designed to fit into a 9/16" or 15/16" standard grid T-bar and through tile mount. Dimensions are nominal for grid ceiling fixtures. All fixture metalwork is white.

³ Fixture designed for drywall and concrete ceilings.

11. CEILING TRIM FINISH

FA00 Not required **FA01** White ¹ **FA02** Black Metallic – Textured ¹

¹ Required for RT4 only.

12. EMERGENCY

E0 Not required
 E1 Emergency system – Integral ¹

¹ A drawing will be required at the time of ordering to determine the required number and location of the emergency sections. ¹ Available upon request, consult factory for details. Not available with 347V.

13. CHICAGO PLENUM

CP0 Not required
 CP1 Chicago Plenum


7 TECHNICAL DATA

LUMINAIRE

Data shown based on max values, consult Performance Data download for more details. One power cord for every 50 linear feet.


Code	BLFR2R
Light Direction	Direct
Lms/Ft	1400
Watts/Ft	13
LPW	135

8 PERFORMANCE DATA

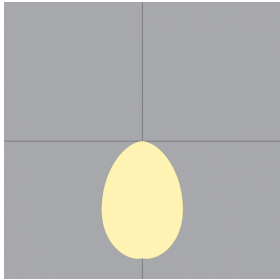DIRECT COMFORT (DD4)	LUMEN/FT	WATT/FT	LPW
	1400	13	109
	1200	11	112
	1000	9	115
	800	7	118
	600	5	123
	400	3	128
	200	2	135


9 TM-30 DATA

CCT 2700K

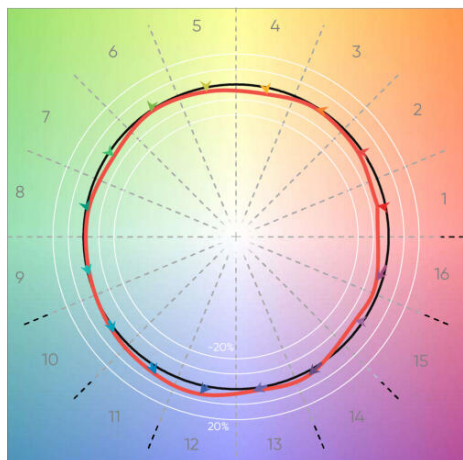


CRI (Ra)	93
CRI (R9)	61
TM30 Rf	91
TM30 Rg	98
Duv	-0.0022

CCT 3000K

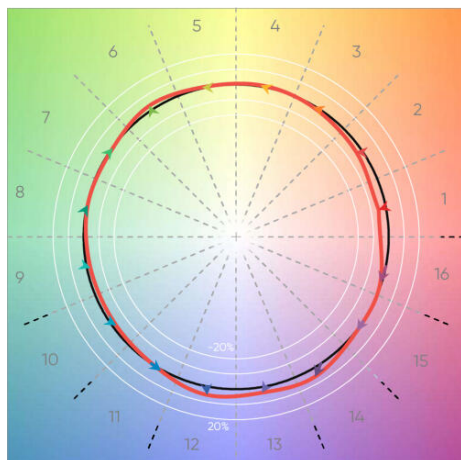


CRI (Ra)	92
CRI (R9)	58
TM30 Rf	92
TM30 Rg	100
Duv	-0.0003

CCT 3500K

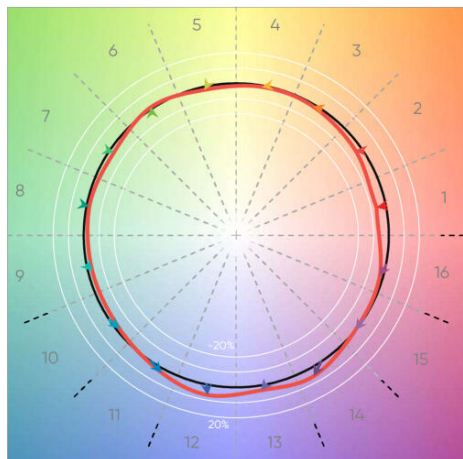

CRI (Ra)	91
CRI (R9)	53
TM30 Rf	90
TM30 Rg	99
Duv	-0.0007


CCT 4000K

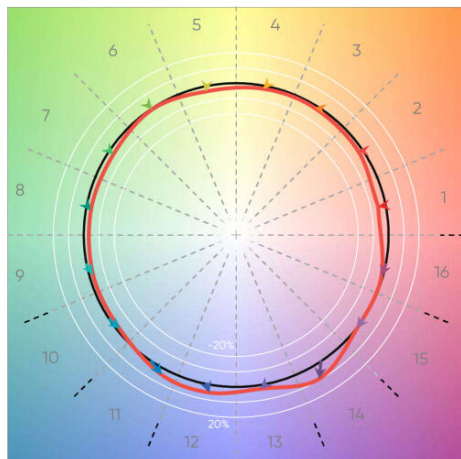


CRI (Ra)	93
CRI (R9)	64
TM30 Rf	90
TM30 Rg	98
Duv	0.0000

10 DIMENSIONAL DIAGRAMS


Grid Ceiling - Tegular ceiling

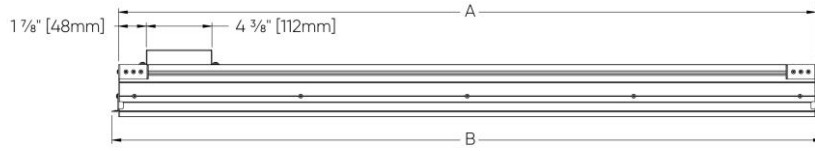


Max Length (Per section)	A	B
4ft	46 13/16" [1189mm]	47 11/16" [1212mm]
6ft	70 13/16" [1791mm]	71 11/16" [1821mm]
8ft	94 13/16" [2408mm]	95 11/16" [2431mm]
10ft	118 13/16" [3018mm]	119 11/16" [3040mm]
12ft	142 13/16" [3627mm]	143 11/16" [3650mm]




Grid Ceiling - T-bar ceiling

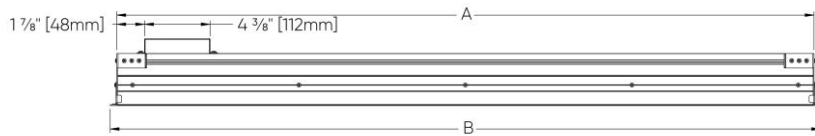


Max Length (Per section)	A	B
4ft	46 13/16" [1189mm]	47 11/16" [1212mm]
6ft	70 13/16" [1791mm]	71 11/16" [1821mm]
8ft	94 13/16" [2408mm]	95 11/16" [2431mm]
10ft	118 13/16" [3018mm]	119 11/16" [3040mm]
12ft	142 13/16" [3627mm]	143 11/16" [3650mm]




Hard Ceiling - Trimless

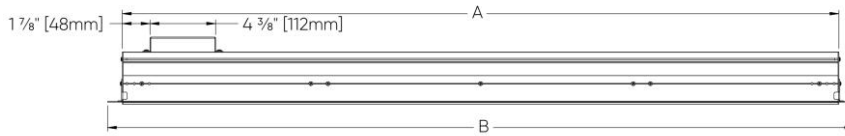

Max Length (Per section)	A	B
4ft	48 1/8" [1222mm]	50 1/8" [1273mm]
6ft	72 1/8" [1831mm]	74 1/8" [1882mm]
8ft	96 1/8" [2431mm]	98 1/8" [2492mm]
10ft	120 1/8" [3050mm]	122 1/8" [3040mm]
12ft	144 1/8" [3660mm]	146 1/8" [3711mm]



Hard Ceiling - Trim

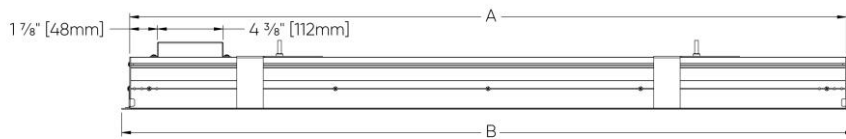

Max Length (Per section)	A	B
4ft	48 1/8" [1222mm]	50 1/8" [1273mm]
6ft	72 1/8" [1831mm]	74 1/8" [1882mm]
8ft	96 1/8" [2431mm]	98 1/8" [2492mm]
10ft	120 1/8" [3050mm]	122 1/8" [3040mm]
12ft	144 1/8" [3660mm]	146 1/8" [3711mm]

