



FRAMED™ - WALL

| | |
|---------------|---------------|
| Project Name: | Fixture Type: |
| Fixture Code: | Quantities: |

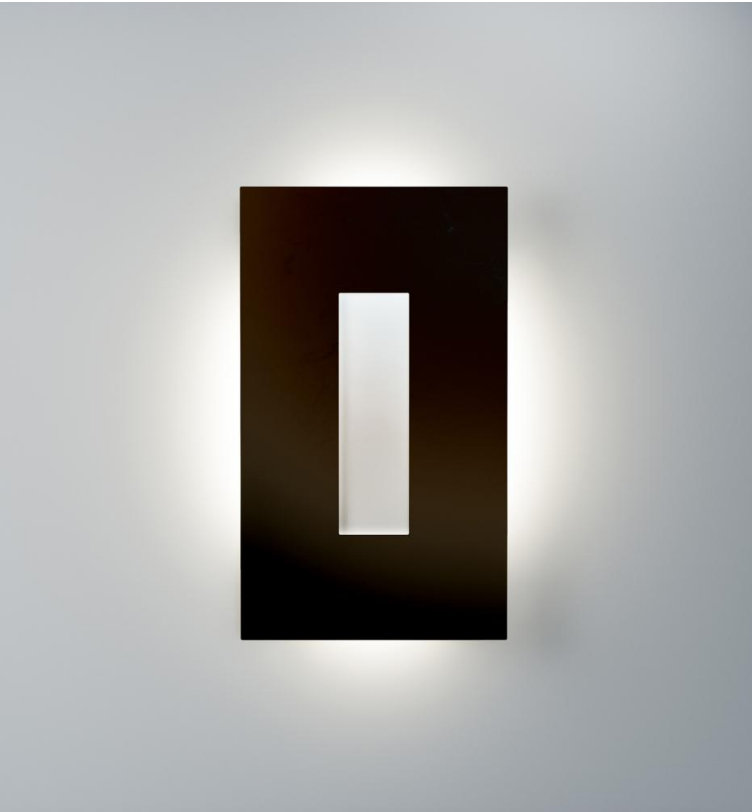

FRAMED™ - WALL

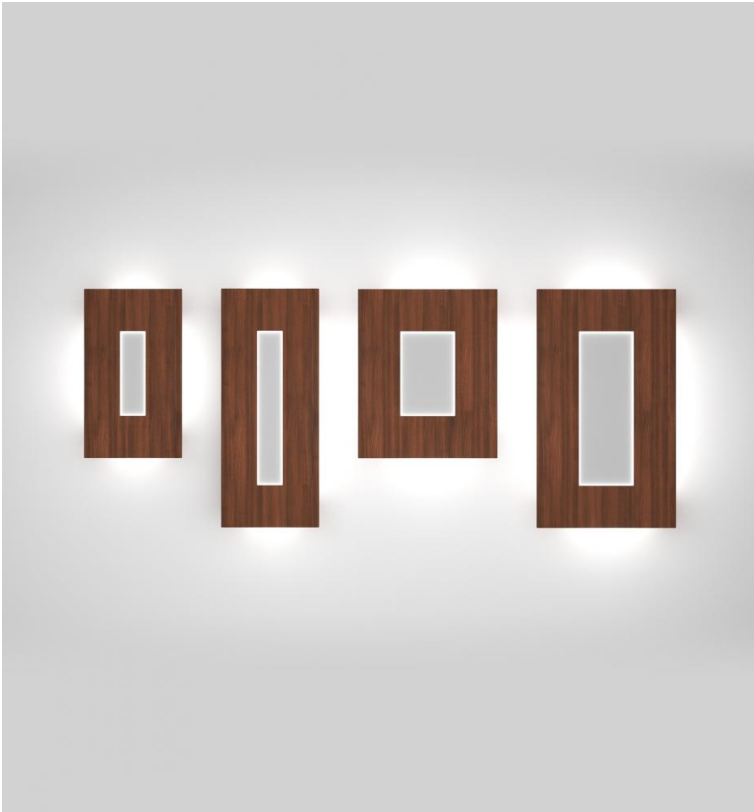

FRAMED™ - WALL

FRAMED is a low-profile exterior light that blends with facades and enhances building architecture. The combination of center and back illumination creates a 3-dimensional effect that embellishes plain walls while complementing the exterior landscape. A combination of 2 finishes can be selected: one for the center panel, and one for the perimeter panel, adding another dimension to the impact **FRAMED** can have on your exterior design. Built to withstand the elements, **FRAMED** combines an IP65 water and dust ingress rating with a minimum starting operating temperature of -20°C to ensure your fixture will provide optimal illumination in almost any environment.

GENERAL SPECIFICATION

Housing

Robust aluminum housing.

Gaskets

One piece silicone.

Lens

High impact acrylic with silicon gasket.

Minimum Starting Temperature

-20°C.

Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

Finish

Exterior grade, powder coated paint.

Reflector

Stainless Steel.

Drivers

HPF electronic, 120-277V (EU-240V).

Rating

IP65 wet location

Mechanical

Mounts directly over a standard electrical junction box (by others - North America only).

OPTICS & FEATURES



Ext-Wall (Framed)



General Diffuse



FRAMED™ - WALL

HOW TO ORDER

A. LUMINAIRE

| | | | |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| 130000 Type A, 1105 lms | 130010 Type B, 1874 lms | 130020 Type C, 1408 lms | 130030 Type D, 2179 lms |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|

Calculations based on Silver Metallic finish.

B. CCT

| | |
|------------------------------|------------------------------|
| 30 3000K (min 80 CRI) | 40 4000K (min 80 CRI) |
|------------------------------|------------------------------|

C. DIMMING

| |
|--|
| DB 0-10V Dimming (10%) ¹ |
|--|

¹ Dimming is equal to or less than 10%.

D. FIXTURE FINISH

| | | | |
|--|--|-------------------------------------|---|
| F2 Black Metallic Textured | F20 Silver Metallic Textured | F47 Bronze Metallic Textured | F27 Wood grain - Light Cherry ¹ |
| F28 Wood grain - Dark Walnut ¹ | F30 Wood grain - White Oak ¹ | F29 Stainless steel | |

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

E. CENTER PANEL FINISH

| | | | |
|--|---|---|------------------------------------|
| WH White | BL Black Metallic Textured | MS Silver Metallic Textured | BM Bronze Metallic Textured |
| Z1 Wood grain - Light Cherry ¹ | Z2 Wood grain - Dark Walnut ¹ | Z3 Wood grain - White Oak ¹ | SS Stainless steel |

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

F. REMOTE EMERGENCY

| |
|----------------------------|
| RE Remote Emergency |
|----------------------------|

FRAMED™ - WALL


TECHNICAL DATA

LUMINAIRE


Calculations based on Silver Metallic finish.

| Code | 130000 | 130010 | 130020 | 130030 |
|---------------|--------|--------|--------|--------|
| Style | Type A | Type B | Type C | Type D |
| Power (LED) | 21W | 35W | 28W | 42W |
| Delivered lms | 1105 | 1874 | 1408 | 2179 |
| LPW | 53 | 54 | 51 | 52 |


LUMINAIRE




Type A, 1105 lms



Type B, 1874 lms




Type C, 1408 lms




Type D, 2179 lms

Calculations based on Silver Metallic finish.


FIXTURE FINISH




Black Metallic
Textured




Silver Metallic
Textured




Bronze Metallic
Textured




Wood grain - Light
Cherry ¹



Wood grain - Dark
Walnut ¹



Wood grain - White Oak
¹



Stainless steel

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

PANEL FINISH




White



Black Metallic
Textured



Silver Metallic
Textured



Bronze Metallic
Textured



Wood grain - Light
Cherry ¹



Wood grain - Dark
Walnut ¹



Wood grain - White Oak
¹



Stainless steel

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

APPROVALS

ADA










IP65




FRAMED™ - WALL

DIMENSIONAL DIAGRAMS


TYPE A

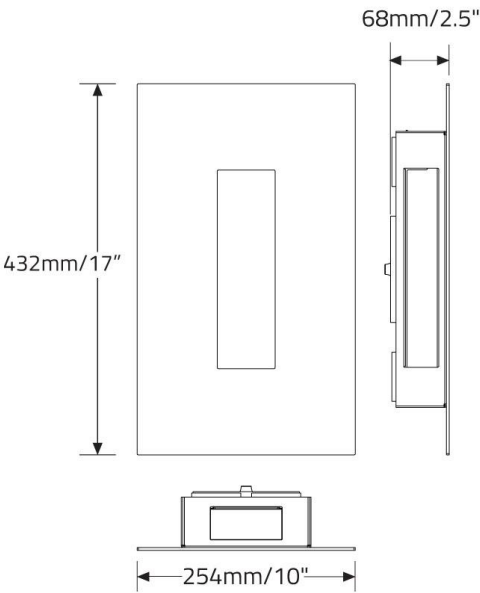

TYPE B

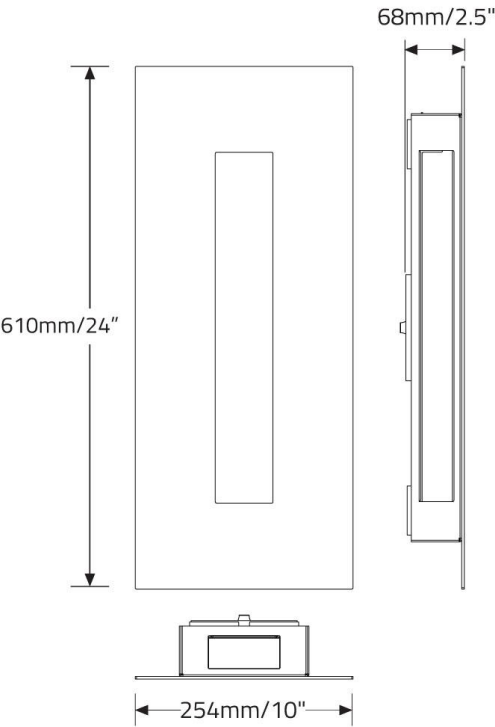

TYPE C

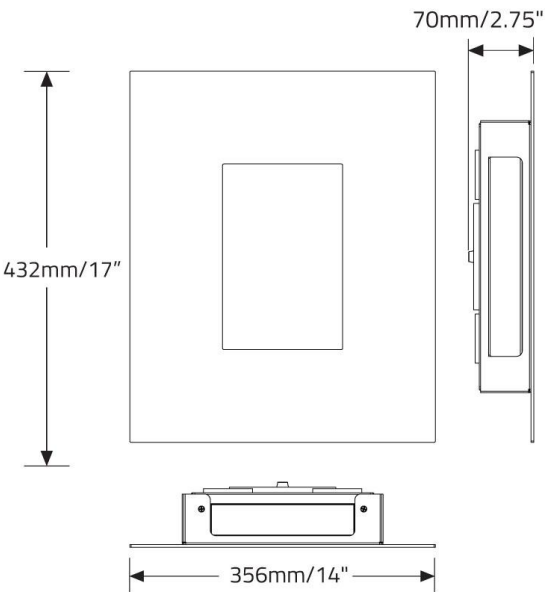

TYPE D

