
FRAMED™

FULL SPECIFICATION SHEET

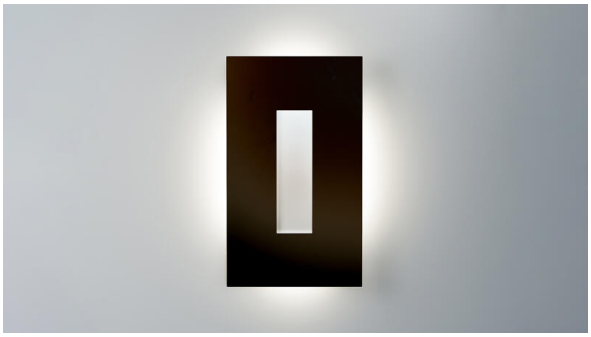

FIXTURE TYPE	FIXTURE CODE	QUANTITIES

1 DESCRIPTION

FRAMED is a low-profile exterior light that blends with facades and enhances building architecture. The combination of center and back illumination creates a 3-dimensional effect that embellishes plain walls while complementing the exterior landscape. A combination of 2 finishes can be selected: one for the center panel, and one for the perimeter panel, adding another dimension to the impact **FRAMED** can have on your exterior design. Built to withstand the elements, **FRAMED** combines an IP65 water and dust ingress rating with a minimum starting operating temperature of -20 °C to ensure your fixture will provide optimal illumination in almost any environment.

2 OPTICS & FEATURES



Ext-Wall (Framed)



General Diffuse

3 APPROVALS

ADA ETL Intertek CE F IP65 WET LOCATION

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

4 GENERAL SPECIFICATION

HOUSING
Robust aluminum housing.

FINISH
Exterior grade, powder coated paint.

GASKETS
One piece silicone.

REFLECTOR
Stainless Steel.

LENS
High impact acrylic with silicon gasket.

DRIVERS
HPF electronic, 120-277V (EU-240V).

MINIMUM STARTING TEMPERATURE
-20°C.

RATING
IP65 wet location

REMOTE EMERGENCY
Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

MECHANICAL
Mounts directly over a standard electrical junction box (by others - North America only).

DELIVERED LUMENS
Delivered lumens & LPW based on 4000K (min 80 CRI).

SUSTAINABILITY
Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS

LUMINAIRE


Type A, 1105 lms


Type B, 1874 lms


Type C, 1408 lms


Type D, 2179 lms

Calculations based on Silver Metallic finish.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice


FIXTURE FINISH



Black Metallic Textured | Silver Metallic Textured | Bronze Metallic Textured | Wood grain - Light Cherry [1] | Wood grain - Dark Walnut [1] | Wood grain - White Oak [1] | Stainless steel

[1] Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

PANEL FINISH

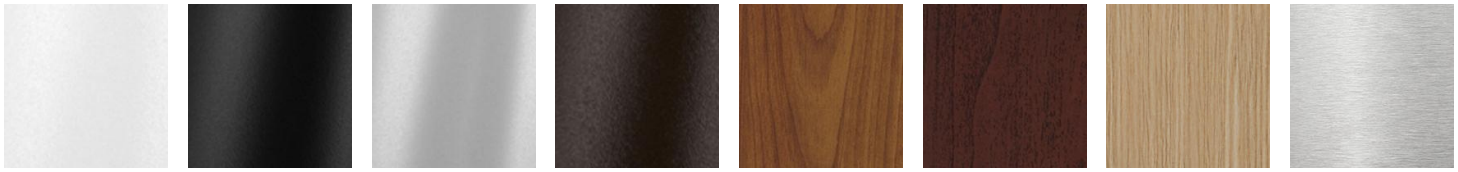

White | Black Metallic Textured | Silver Metallic Textured | Bronze Metallic Textured | Wood grain - Light Cherry [1] | Wood grain - Dark Walnut [1] | Wood grain - White Oak [1] | Stainless steel

[1] Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

6 HOW TO ORDER

LUMINAIRE

130000 Type A, 1105 lms
130010 Type B, 1874 lms
130020 Type C, 1408 lms
130030 Type D, 2179 lms

Calculations based on Silver Metallic finish.

CCT

30 3000K (min 80 CRI)
40 4000K (min 80 CRI)

DIMMING

DB 0-10V Dimming (10%) [1]

[1] Dimming is equal to or less than 10%.

FIXTURE FINISH

F2 Black Metallic Textured
F20 Silver Metallic Textured
F47 Bronze Metallic Textured
F27 Wood grain - Light Cherry [1]
F28 Wood grain - Dark Walnut [1]
F30 Wood grain - White Oak [1]
F29 Stainless steel

[1] Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

© 2026 Beta-Calco Inc. Specifications are subject to change without notice

CENTER PANEL FINISH

WH White
BL Black Metallic Textured
MS Silver Metallic Textured
BM Bronze Metallic Textured
Z1 Wood grain - Light Cherry [1]
Z2 Wood grain - Dark Walnut [1]
Z3 Wood grain - White Oak [1]
SS Stainless steel

[1] Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

REMOTE EMERGENCY

RE Remote Emergency

7 TECHNICAL DATA

LUMINAIRE


Calculations based on Silver Metallic finish.

Code	130000	130010	130020	130030
Style	Type A	Type B	Type C	Type D
Power (LED)	21W	35W	28W	42W
Delivered lms	1105	1874	1408	2179
LPW	53	54	51	52


© 2026 Beta-Calco Inc. Specifications are subject to change without notice

8 DIMENSIONAL DIAGRAMS


TYPE A

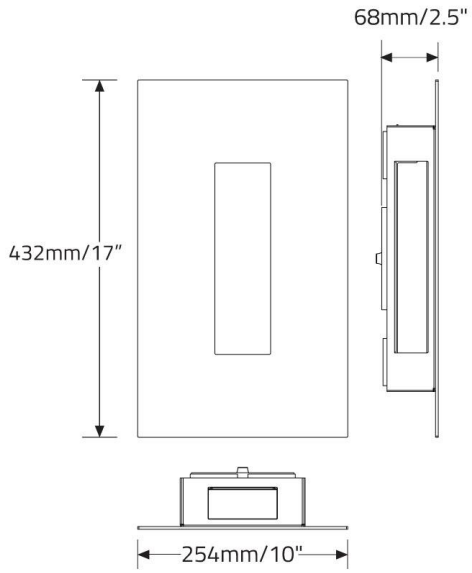


TYPE B

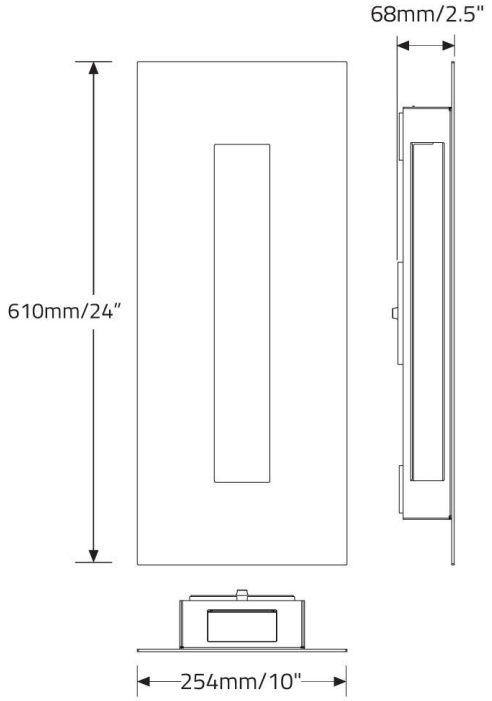

TYPE C

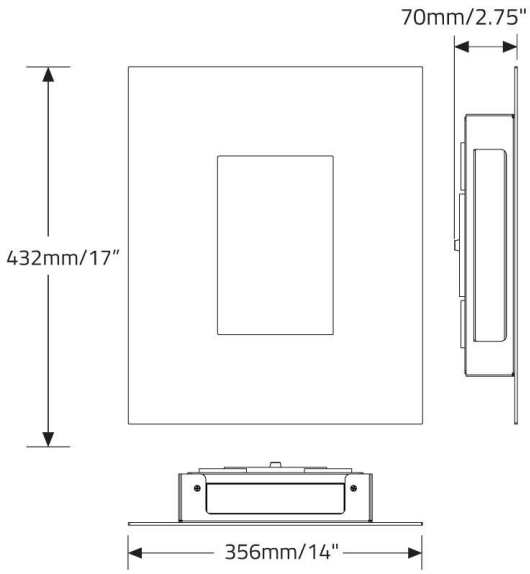

TYPE D

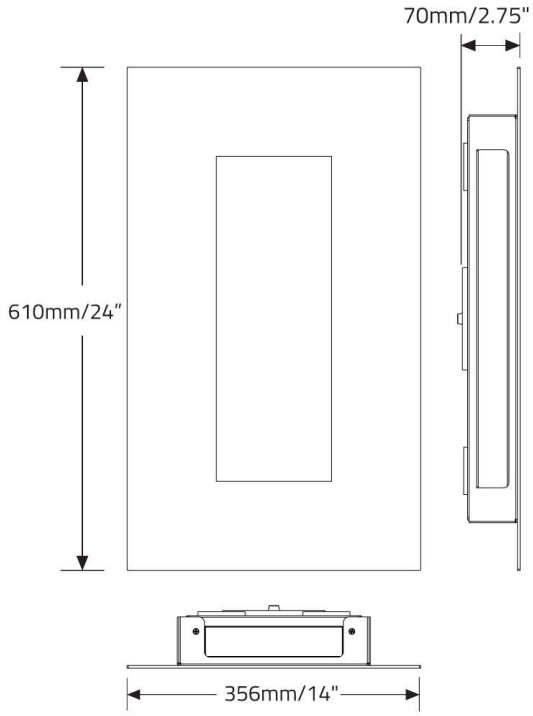

© 2026 Beta-Calco Inc. Specifications are subject to change without notice