Project Name: Fixture Type:

Fixture Code: Quantities:











The fluid lines of the Endless system transform into a closed-loop six-sided shape. With rounded edges and a hollow form, HEXAGON adds a serene visual element and a unique alternative to the perfectionist ring. As a strong geometrical shape, Hexagon remains minimalist while conveying stability and lightness. Available with an acoustic panel in 13 unique colors and sizes ranging from 2' to 7'. This statement piece is a balance between a polygon and a circle, symbolizing harmony.

GENERAL SPECIFICATION

Body

Extruded and die-cast aluminum.

Lens

Opal polycarbonate.

Drivers

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

Acoustic Panels Fire Rating

ASTM E84-2018 Class A.

Acoustic Panels Thickness

12mm (0.5")

Sensors

Consult factory regarding sensor compatibility.

Approvals

Damp Rated.

Acoustic Panel Maintenance

Durable and easy to maintain. Dust regularly and clean marks with mild detergent, rinse, and blot.

Finish

Powder coated.

Mechanical

Luminaires mount directly over J box (by others).

Acoustic Panels NRC Rating

0.80

Acoustic Panels Material

100% recycled polyester fiber (PET).

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 90+

Reported L70 @25°C (77°F)

>102,000 hrs @ 700 lumens/ft (2300 lumens/m)

Designed by

Serge Cornelissen

DESIGN

US Pat. No. D1,042,936

OPTICS & FEATURES









Ceiling Direct

Acoustic

Direct

Declare

HOW TO ORDER

A. LUMINAIRE

HEXG1C02 2ft HEXG1C03 3ft HEXG1C04 4ft HEXG1C05 5ft

HEXG1C06 6ft HEXG1C07 7ft

B. LM/FT

LPF030 300 lm/ft ¹ **LPF050** 500 lm/ft ² **LPF070** 700 lm/ft ³

Black Metallic Textured is only available with 300 lm/ft and 500 lm/ft.

C. CRI

CR90 CRI 90+

D. CCT

CTA30 3000K CTA35 3500K CTA40 4000K

E. VOLTAGE

V1 120/277V

F. DIMMING

DA01 0-10V Dimming 1.0%

G. FIXTURE FINISH

FA01 White FA02 Black Metallic Textured ¹ FA20 Silver Metallic Textured

H. ACOUSTIC PANEL COLOR

AP00 Not requiredAP02 CitrusAP04 WhiteAP08 Red CoffeeAP11 Light GrayAP13 Apple GreenAP22 BlueAP26 Sesame GrayAP27 BlackAP47 Navy PeonyAP60 Pure RedAP73 Cloudburst

AP89 Douglas Fir APW01 Oak

Acoustic panels exceeding 48" will have one seam. All other dimensions will be seamless. For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages. Contact factory for larger sizes and additional colors.

¹ Black Metallic Textured is only available with 300 lm/ft and 500 lm/ft.

TECHNICAL DATA

LUMINAIRE

Code	HEXG1C02	HEXG1C03	HEXG1C04	HEXG1C05	HEXG1C06	HEXG1C07
Size	2ft	3ft	4ft	5ft	6ft	7ft
Light Direction	Direct	Direct	Direct	Direct	Direct	Direct
Wattage	69	106	138	175	207	244
Direct Ims	4300	6500	8500	10800	12700	15000
LPW	61	61	61	61	61	61

FIXTURE FINISH







White Black Metallic Textured ¹ Silver Metallic Textured

ACOUSTIC PANEL COLOR



Acoustic panels exceeding 48" will have one seam. All other dimensions will be seamless.

For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages. Contact factory for larger sizes and additional colors.

APPROVALS












¹ Black Metallic Textured is only available with 300 lm/ft and 500 lm/ft.


PERFORMANCE DATA

DIRECT (WHITE/SILVER METALLIC TEXTURED) DIFFUSED (DD3)	LUMEN/FT	WATT/FT	LPW
	700	12	61
	500	8	66
	300	5	73
DIRECT (BLACK METALLIC TEXTURED) DIFFUSED (DD3)	LUMEN/FT	WATT/FT	LPW
	LUMEN/FT 500 300	WATT/FT 12 8	LPW 38 41


DIMENSIONAL DIAGRAMS


2 FT

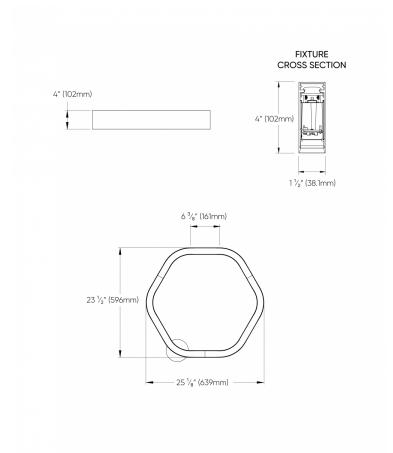

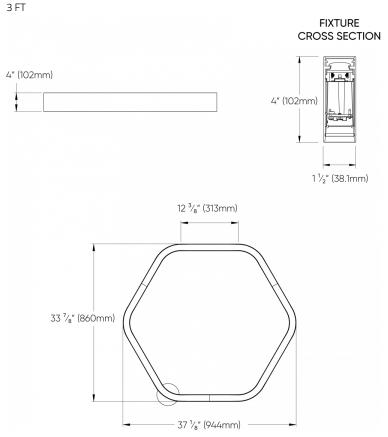

4FT 5FT

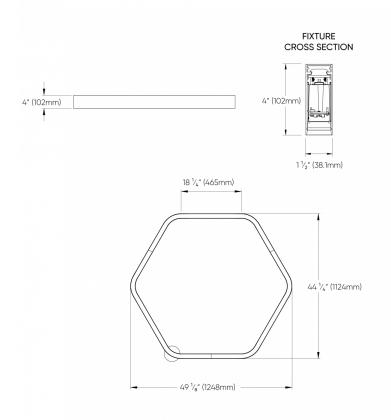

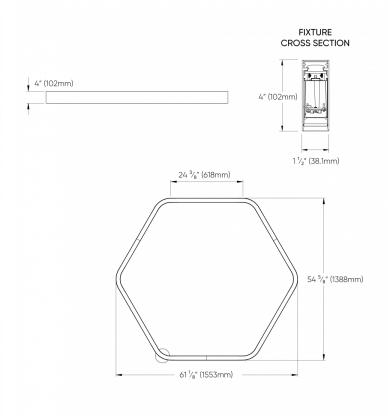

6 FT 7 FT

