




LE LOUVRE™

FULL SPECIFICATION SHEET

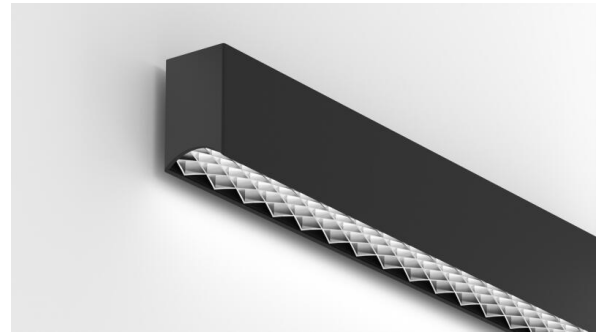

FIXTURE TYPE



FIXTURE CODE



QUANTITIES

1 DESCRIPTION

The striking new concept in louver technology is disrupting the linear lighting category, and taking glare control to new heights with a UGR <19. Our award-winning design with diagonal cross-hatched construction of the louver in a soft concave shape provides not just visual comfort but a touch of panache unseen in traditional linear lighting. Louvers are available in white for higher performance, black for the highest glare control, and rich satinized finishes – chrome, gold, champagne, for elegant interior designs. The selection of louvers can offer either a monochromatic appearance to blend into the space or create contrast to highlight the structure and uniqueness of the **LE LOUVRE** in a space. This stunning luminaire can also deliver up to 130 lumens per watt while controlling glare so effectively.

2 OPTICS & FEATURES

Wall - Direct/Indirect	Indirect UD2	Indirect UD3	Direct DD4	Bios	Declare.	PoE	TUNABLE WHITE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY
Aluminum.

FINISH
Powder coated

DRIVERS

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

POE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K CRI 80+

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

REPORTED L70 @25°C (77°F)

> 60,000 hrs @ 2000 lumens/ft (6000 lumens/m)

TUNABLE WHITE

Tunable White range from 2700K to 6500K is available; contact the factory for details.

APPROVALS

Damp Rated.

DESIGN

US Pat. No. D959,043.

LENS

Opal acrylic. 2.4" width.

BIOS

For circadian lighting, consult factory.

MECHANICAL

Luminaires mount directly over J box (by others).

SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

ESTIMATED L70 @25°C (77°F)

> 165,000 hrs @ 2000 lumens/ft (6000 lumens/m)

RGBW

RGBW available, consult factory.

DESIGNED BY


Serge Cornelissen.

SUSTAINABILITY

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

5 DESIGN OPTIONS


LOUVER

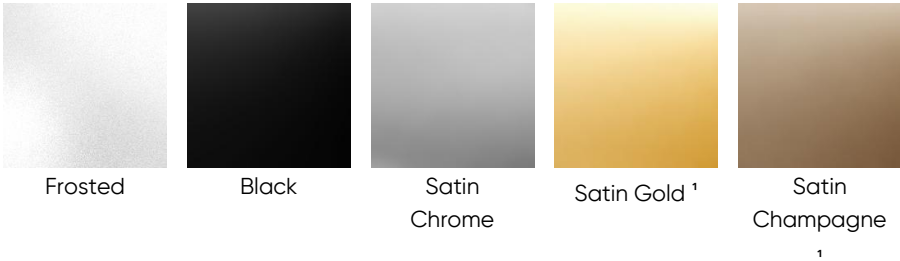

Refer to the performance data for the output specifications of each louver option.

¹ There will be a slight color cast on the wall when using the Satin Gold or Satin Champagne louvers.

FINISH

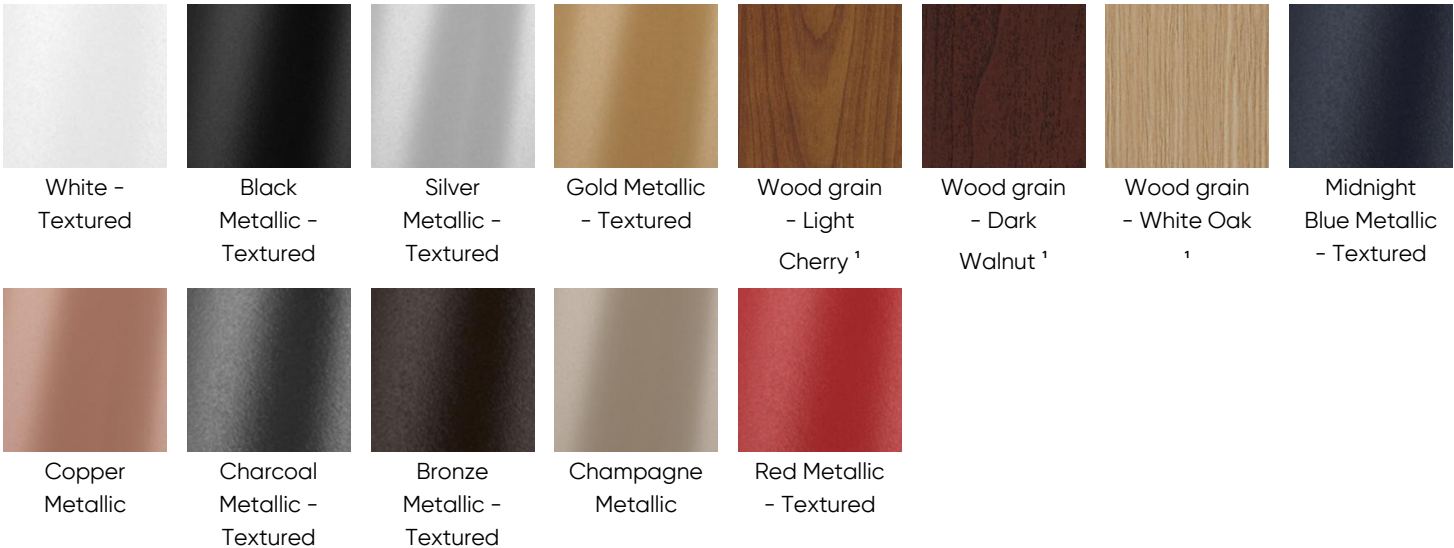

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

6 HOW TO ORDER

1. LUMINAIRE

LELW1W Direct **LELW2W** Direct/Indirect

One power cord for every 50 linear feet.

2. LENGTH OF RUN

The minimum length of order is 4'. Lengths are to be in 2' increments. Example:

4' = SFA040, 10' = SFA100, 50' = SFA500

For runs over 50' in length, consult factory.

SFA_ _ _

3. MAX LENGTH PER SECTION

SL04 4ft	SL06 6ft	SL08 8ft	SL10 10ft
SL12 12ft			

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40' run is required and SL12 (12') is selected, we would provide 4 10' segments. For special requirements, please contact sales@betacalco.com.

4. LOUVER

LV1 Frosted	LV2 Black	LV4 Satin Chrome	LV6 Satin Gold ¹
LV9 Satin Champagne ¹			

Refer to the performance data for the output specifications of each louver option.

¹ There will be a slight color cast on the wall when using the Satin Gold or Satin Champagne louvers.

5. LM/FT (DIRECT)

LPF010 100 lm/ft	LPF020 200 lm/ft	LPF030 300 lm/ft	LPF040 400 lm/ft
LPF050 500 lm/ft	LPF060 600 lm/ft	LPF070 700 lm/ft	LPF080 800 lm/ft
LPF100 1000 lm/ft	LPF120 1200 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft. based on selected louver.

6. LM/FT (INDIRECT)

LPG000 Not required	LPG025 250 lm/ft	LPG050 500 lm/ft	LPG075 750 lm/ft
LPG100 1000 lm/ft	LPG120 1200 lm/ft	LPG160 1600 lm/ft	

Consult website for available lumens/ft based on selected louvers.

7. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

8. CCT (DIRECT)

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
CTA60 Tunable White ¹			

¹ Consult factory.

9. CCT (INDIRECT)

CTB00 Not required	CTB27 2700K	CTB30 3000K	CTB35 3500K
CTB40 4000K	CTB60 Tunable White ¹		

¹ Consult factory.

10. DIRECT LENS

DD1 Asymmetric ¹	DD4 Comfort
------------------------------------	--------------------

¹ Recommended for use with Frosted louver only. When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

11. INDIRECT LENS

UD0 Not required	UD2 Opal	UD3 Asymmetric ¹
-------------------------	-----------------	------------------------------------

¹ Available up to 1200 lm/ft. The asymmetric distribution will be directed away from the wall.

12. BLACKOUT PLATE

UB00 Not required	UB_ _ Blackout plate ¹
--------------------------	--

¹ Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.

13. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ Not available in North America. ² Only available with DA01 dimming. ³ Only available with DA45 dimming.

14. DIMMING

DA01 0-10V Dimming 1.0%	DA02 0-10V Dimming 0.1% ¹	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²	DA45 PoE ³		

¹ Not available with 347V. ² Not available in North America. ³ Only available with V4.

15. FIXTURE FINISH

FA01 White – Textured	FA02 Black Metallic – Textured	FA20 Silver Metallic – Textured	FA25 Gold Metallic – Textured
FA27 Wood grain – Light Cherry ¹	FA28 Wood grain – Dark Walnut ¹	FA30 Wood grain – White Oak ¹	FA44 Midnight Blue Metallic – Textured
FA45 Copper Metallic	FA46 Charcoal Metallic – Textured	FA47 Bronze Metallic – Textured	FA52 Champagne Metallic
FA53 Red Metallic – Textured			

¹ Wood grain finishes may incur longer lead times and setup charges. Consult factory for details.

16. EMERGENCY

E0 Not required	E1 Emergency system – Integral ¹	E3 Emergency generator circuit ¹
------------------------	--	--

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Available upon request, consult factory for details. Not available with 347V.

17. CIRCUITS

CS1 Single circuit	CS2 Dual circuit ¹
---------------------------	--------------------------------------

18. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

7 TECHNICAL DATA

LUMINAIRE

One power cord for every 50 linear feet.

Code	LELW1W	LELW2W
Light Direction	Direct	Direct/Indirect

8 PERFORMANCE DATA

DIRECT FROSTED LOUVER WITH COMFORT LENS (DD4)

	LUMEN/FT	WATT/FT	LPW
	1200	13	101
	1000	9	107
	800	7	109
	700	6	111
	600	5	115
	500	4	115
	400	3	115
	300	2	116
	200		121

DIRECT BLACK LOUVER WITH COMFORT LENS (DD4)

	LUMEN/FT	WATT/FT	LPW
	500	13	40
	400	9	42
	300	7	43
	200	5	45
	100	2	47

DIRECT SATIN CHROME LOUVER WITH COMFORT LENS (DD4)

	LUMEN/FT	WATT/FT	LPW
	800	13	60
	700	11	60
	600	9	63
	500	7	65
	400	5	68
	300	3	68
	200	3	68
	100	2	69

DIRECT SATIN GOLD LOUVER WITH COMFORT LENS (DD4)

	LUMEN/FT	WATT/FT	LPW
	800	13	59
	700	11	59
	600	9	62
	500	7	63
	400	5	66
	300	3	66
	200	3	66
	100	2	68

DIRECT SATIN CHAMPAGNE LOUVER WITH COMFORT LENS (DD4)

	LUMEN/FT	WATT/FT	LPW
	800	13	60
	700	11	60
	600	9	63
	500	7	65
	400	5	68
	300	3	68
	200	3	68
	100	2	69

INDIRECT OPAL (UD2)


	LUMEN/FT	WATT/FT	LPW
	1600	13	128
	1200	9	132
	1000	7	136
	750	5	144
	500	3	144
	250	2	147

INDIRECT ASYMMETRIC (UD3)

	LUMEN/FT	WATT/FT	LPW
	1200	13	97
	1000	10	100
	750	8	103
	500	5	107
	250	2	112


9 TM-30 DATA

CCT 2700K

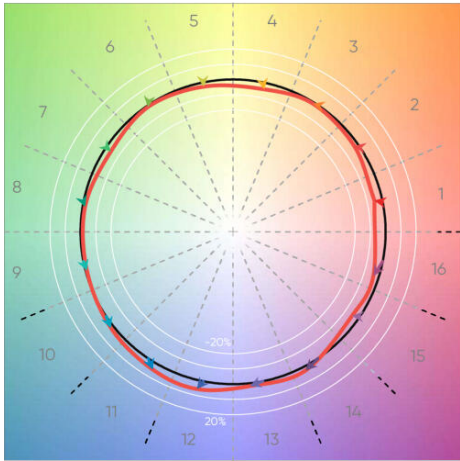


CRI(Ra)	93
CRI(R9)	61
TM30(Rf)	91
TM30(Rg)	98
Duv	-0.0022

CCT 3000K

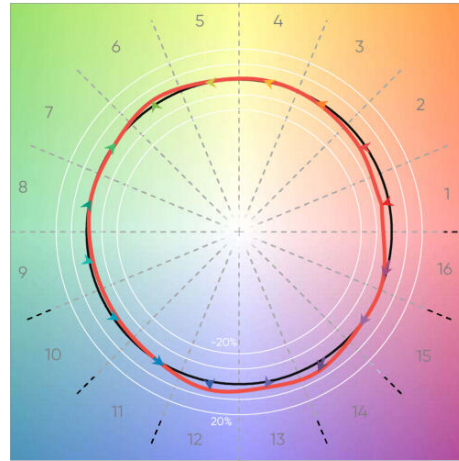


CRI(Ra)	92
CRI(R9)	58
TM30(Rf)	92
TM30(Rg)	100
Duv	-0.0003

CCT 3500K

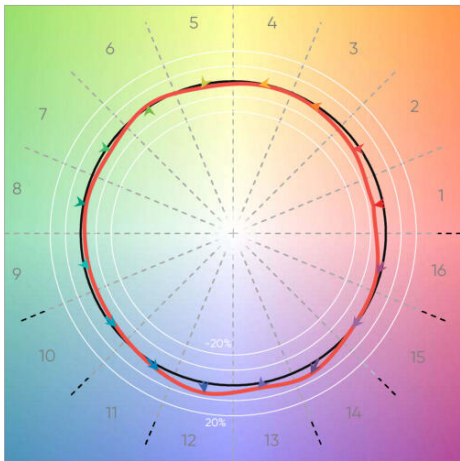

CRI(Ra)	91
CRI(R9)	53
TM30(Rf)	90
TM30(Rg)	99
Duv	-0.0007





CCT 4000K

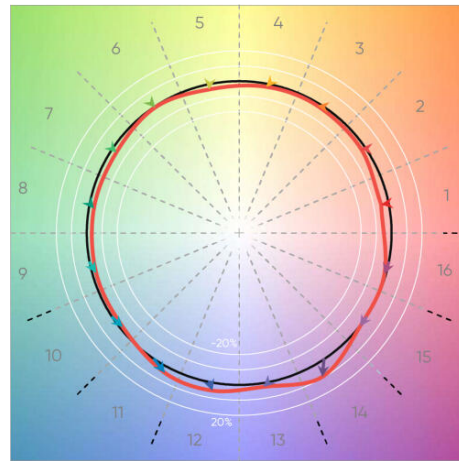


CRI(Ra)	93
CRI(R9)	64
TM30(Rf)	90
TM30(Rg)	98
Duv	0.0000

10 DIMENSIONAL DIAGRAMS

Isometric Views

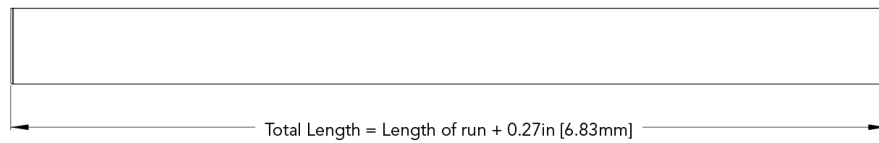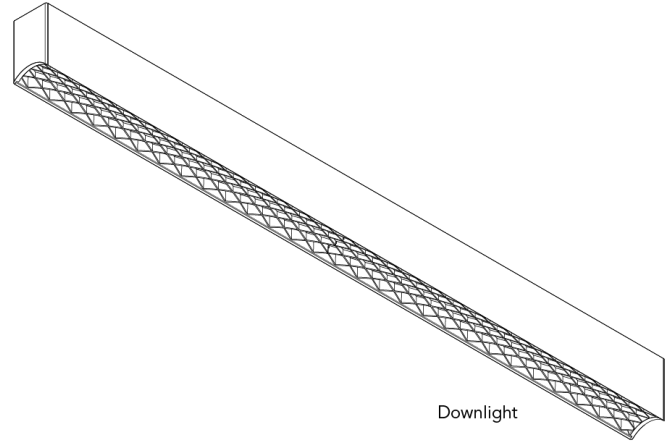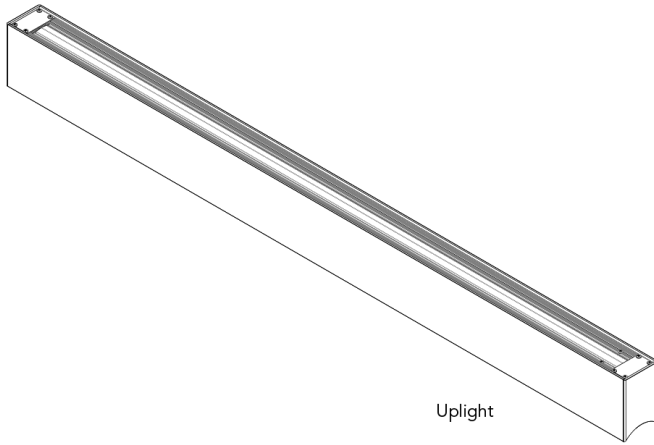


Top View [Uplight]




Bottom View [Downlight]

WALL MOUNT CONFIGURATIONS

4FT

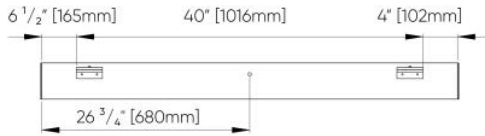


6FT

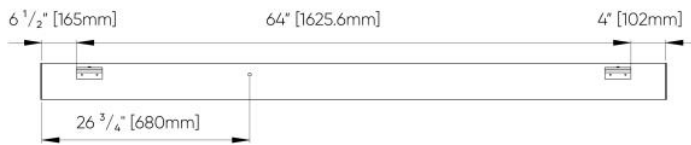

8FT



10FT

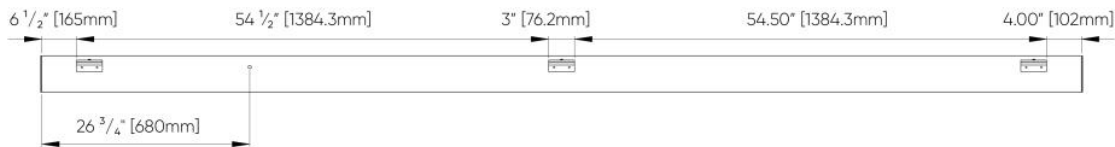

12FT

