




LE LOUVRE™

SHORT SPECIFICATION SHEET

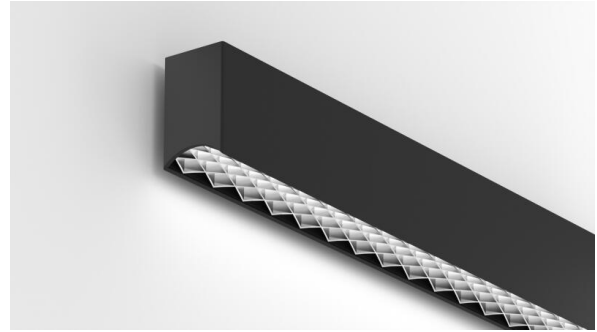

Fixture Type

Fixture Code

Quantities

1 HOW TO ORDER

1. LUMINAIRE

LELW1W Direct

LELW2W Direct/Indirect

One power cord for every 50 linear feet.

2. LENGTH OF RUN

The minimum length of order is 4ft. Lengths are to be in 2ft increments.

Example: 4ft = SFA040

Example: 10ft = SFA100

Example: 50ft = SFA500

For runs over 50ft in length, consult factory.

SFA_ _ _

The minimum length of order is 4ft. Lengths are to be in 2ft increments.

Example: 4ft = SFA040

Example: 10ft = SFA100

Example: 50ft = SFA500

For runs over 50ft in length, consult factory.

3. MAX LENGTH PER SECTION

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

4. LOUVER

LV1 Frosted

LV2 Black

LV4 Satin Chrome

LV6 Satin Gold ¹

LV9 Satin Champagne ¹

Refer to the performance data for the output specifications of each louver option.

¹ There will be a slight color cast on the wall when using the Satin Gold or Satin Champagne louvers.

5. LM/FT (DIRECT)

LPF010 100 lm/ft	LPF020 200 lm/ft	LPF030 300 lm/ft	LPF040 400 lm/ft
LPF050 500 lm/ft	LPF060 600 lm/ft	LPF070 700 lm/ft	LPF080 800 lm/ft
LPF100 1000 lm/ft	LPF120 1200 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft. based on selected louver.

6. LM/FT (INDIRECT)

LPG000 Not required	LPG025 250 lm/ft	LPG050 500 lm/ft	LPG075 750 lm/ft
LPG100 1000 lm/ft	LPG120 1200 lm/ft	LPG160 1600 lm/ft	

Consult website for available lumens/ft based on selected louvers.

7. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

8. CCT (DIRECT)

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

9. CCT (INDIRECT)

CTB00 Not required	CTB27 2700K	CTB30 3000K	CTB35 3500K
CTB40 4000K			

10. DIRECT DIFFUSER

DD1 Asymmetric diffuser ¹	DD4 Comfort diffuser
---	-----------------------------

¹ Recommended for use with Frosted louver only. When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

11. UPLIGHT DIFFUSER

UD0 Not required	UD2 Opal diffuser	UD3 Asymmetric diffuser ¹
-------------------------	--------------------------	---

¹ Available up to 1200 lm/ft. The asymmetric distribution will be directed away from the wall.

12. BLACKOUT PLATE

UB00 Not required **UB_ _** Blackout plate ¹

¹ Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.

13. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ Not available in North America.

² Only available with DA01 dimming.

³ Only available with DA45 dimming.

14. DIMMING

DA01 0–10V Dimming 1.0% **DA02** 0–10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with 347V.

² Not available in North America.

³ Only available with V4.

15. FIXTURE FINISH

FA01 White – Textured **FA02** Black Metallic – Textured **FA20** Silver Metallic – Textured **FA25** Gold Metallic – Textured
FA27 Wood grain – Light Cherry ¹ **FA28** Wood grain – Dark Walnut ¹ **FA44** Midnight Blue Metallic – Textured **FA45** Copper Metallic
FA46 Charcoal Metallic – Textured **FA47** Bronze Metallic – Textured **FA52** Champagne Metallic **FA53** Red Metallic – Textured

¹ Longer than normal lead times may apply, consult factory.

16. EMERGENCY

E0 Not required **E1** Emergency system – Integral ¹ **E3** Emergency generator circuit ¹

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. ¹ Available upon request, consult factory for details. Not available with 347V.

17. CIRCUITS

CS1 Single circuit

CS2 Dual circuit ¹

18. SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.