


MATREX SINGLE™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:



MATREX SINGLE™ - SUSPENDED

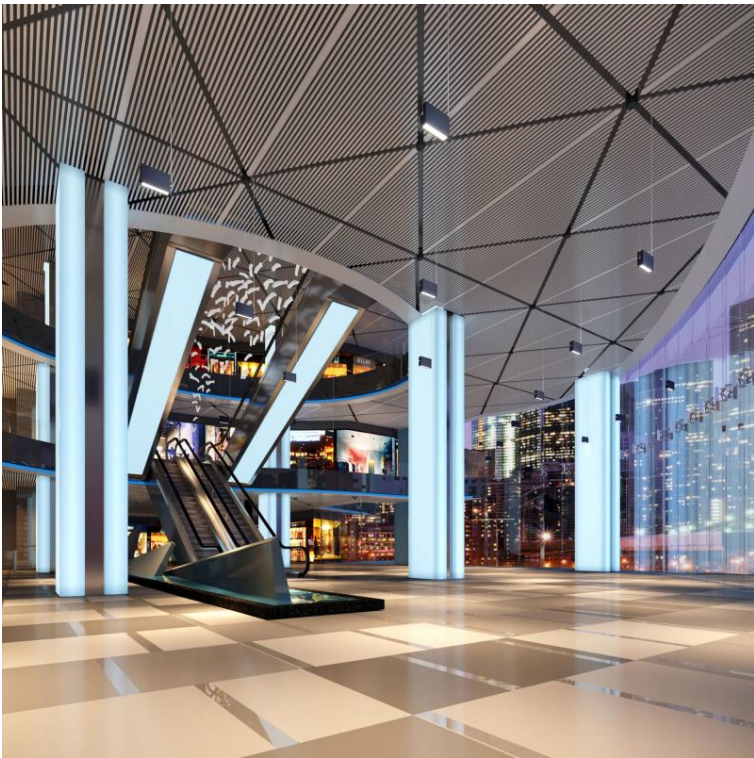

MATREX SINGLE™ - SUSPENDED

MATREX is a family of spotlights packed with power for projecting light at great distances. With best-in-class thermal management and hidden heat sinks, **MATREX's** form factor is significantly smaller than traditional spotlights. Multiple mounting systems are available, providing a variety of functions that work in a range of applications, especially those with multiple ceiling heights. Suspension points originate from the sides allowing for unobstructed uplight. The revolutionary design delivers industry-leading performance from a significantly reduced form factor. The snoots are effective in controlling light spill and reducing glare.

GENERAL SPECIFICATION

Body and trim

Steel and aluminum.

Suspension

Steel cables.

Integral emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Integral emergency EU luminaires have a 17" (434mm) x 8.3" (210mm) x 2.3" (58mm) canopy with LED charge indicator. Not available with a 347V supply. Drivers are in the canopy.

Mechanical

Luminaires mount to a junction box or switch box (by others - North America only), depending on canopy selection.

Delivered lumens

Delivered lumens & lpw based on 4000K, CRI 80+.

Reported L70 @25°C (77°F)

> 60,000 hrs.

Designed by

Serge Cornelissen.

Finish

Powder coated as specified. Custom paint finishes available to special order.

Power cable

Silver braided.

Drivers

HPF, electronic, 120-277V, 347V (EU-240V). The driver is integral to the fixture housing, except when ordering emergency and then the driver is integral in the canopy.

Sensors

Consult factory regarding sensor compatibility.

Approvals

Damp Rated.


Estimated L70 @25°C (77°F)

> 171,000 hrs.

Design

US Pat. No. D917,765.

OPTICS & FEATURES

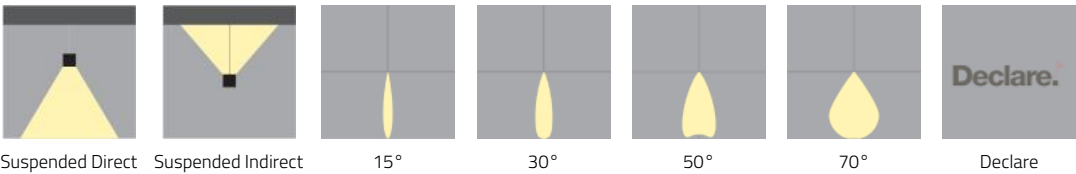

MATREX SINGLE™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

MATP1P01 Direct, 9200 lms **MATP2P01** Indirect, 9200 lms

All data shown at max output and nominal values.

B. LUMENS

LMA0230 2300 **LMA0460** 4600 **LMA0690** 6900 **LMA0920** 9200

* Max lumen values shown, refer to IES files for the different snoot and beam options.

C. CRI

CR80 CRI 80+ **CR90** CRI 90+

D. CCT

CTA30 3000K **CTA35** 3500K **CTA40** 4000K **CTA27** 2700K ¹

¹ 2700K is only available with CRI 80+

E. BEAM ANGLE

BA15 15° **BA30** 30° **BA50** 50° **BA70** 70°
BA80 50°x80° ¹

¹ For use with NT8 Ladder Louver only.

F. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ²

¹ Not available in North America.
² Only available with DA01 dimming.

G. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ^{1 2} **DA40** DMX Dimming ^{1 3}

¹ Not available with 347V.
² Not available in North America.
³ Must be used with CN4 canopy only.

H. FIXTURE FINISH

FA01 White **FA02** Black Metallic - Textured **FA20** Silver Metallic - Textured **FA25** Gold Metallic - Textured
FA44 Midnight Blue Metallic - Textured **FA46** Charcoal Metallic - Textured **FA47** Bronze Metallic - Textured **FA53** Red Metallic - Textured

I. CANOPY

CN1 Canopy A ¹ **CN2** Canopy B ² **CN3** Canopy C ^{1 3} **CN4** Canopy D ^{1 *}

¹ Fits over a standard j-box (provided by others)
² Fits over a switch box (provided by others, 4"x2.125")
³ For use with V2 (240V) only.
* To be ordered with E1 (Emergency Integral) or DA40 (DMX Dimming)

MATREX SINGLE™ - SUSPENDED

J. CANOPY FINISH

CF01 White	CF02 Black Metallic - Textured	CF20 Silver Metallic - Textured	CF25 Gold Metallic - Textured
CF44 Midnight Blue Metallic - Textured	CF46 Charcoal Metallic - Textured	CF47 Bronze Metallic - Textured	CF53 Red Metallic - Textured

K. SNOOTS AND LOUVERS

NT1 Standard Snoot - Black ¹	NT2 Standard Snoot - White ¹	NT3 Long Snoot - Black ¹	NT4 Long Snoot - White ¹
NT7 Hex Louver - Black ²	NT8 Ladder Louver - Black ³		

For precise beam angle and lumen output, please refer to the IES files. Note that using snoots and louvers may decrease overall efficacy.

¹ A snoot must be picked at time of order, if you are not ordering a louver.

² Not available with BA70 beam angle or indirect.

³ Available with BA80 beam angle and 2300 lumens only and Direct only.

L. EMERGENCY

E0 Emergency system not required	E1 Emergency system - Integral ^{1 2}
---	--

¹ Drivers are in the canopy. Not available with 347V. Two power cables will be supplied.

² CN4 canopy only used when ordering emergency or DMX.

MATREX SINGLE™ - SUSPENDED








TECHNICAL DATA

LUMINAIRE




All data shown at max output and nominal values.

Code	MATP1P01	MATP2P01
Light Direction	Direct	Indirect
Wattage	82W	82W
Delivered lms	9200	9200
LPW	130	130

FINISH - FIXTURE

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Charcoal Metallic - Textured	Bronze Metallic - Textured	Red Metallic - Textured

FINISH - CANOPY

							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Midnight Blue Metallic - Textured	Charcoal Metallic - Textured	Bronze Metallic - Textured	Red Metallic - Textured


APPROVALS



MATREX SINGLE™ - SUSPENDED

PERFORMANCE DATA

DIRECT 15° BEAM ANGLE

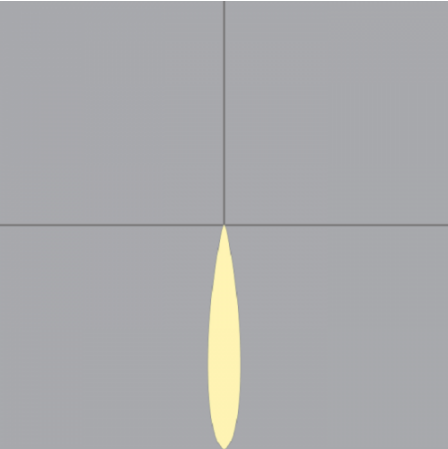


WATTS
16
36
57
82

LUMENS
2300
4500
6800
9000

LPW
138
127
118
110

DIRECT 30° BEAM ANGLE

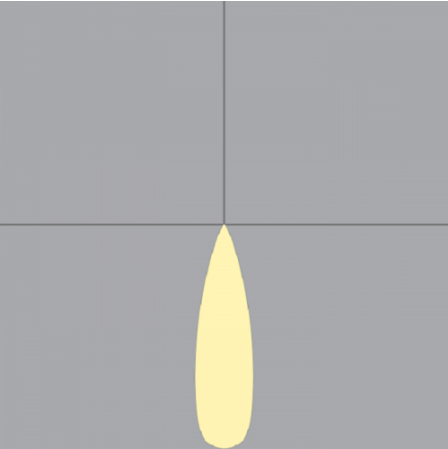


WATTS
16
36
57
82

LUMENS
2200
4600
6900
9200

LPW
140
127
118
110

DIRECT 50° BEAM ANGLE

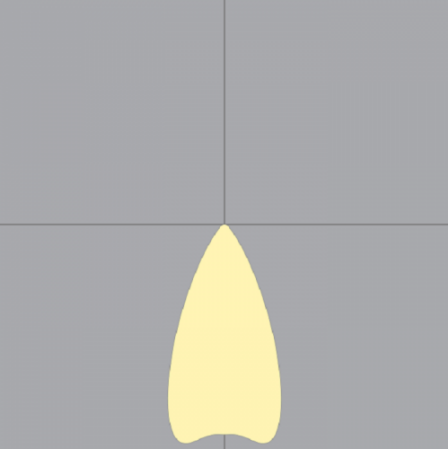


WATTS
16
36
57
82

LUMENS
2200
4400
6500
8700

LPW
133
123
114
107

MATREX SINGLE™ - SUSPENDED

DIRECT 70° BEAM ANGLE

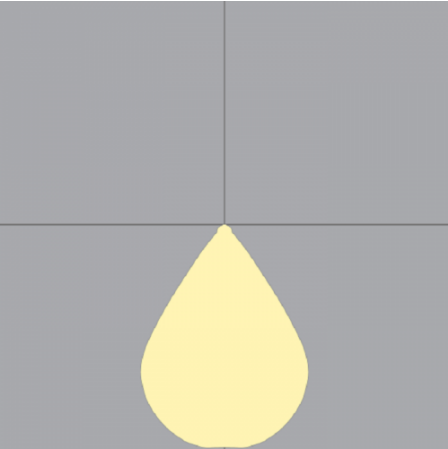

WATTS
16
36
57
82


LUMENS
2200
4400
6600
8800

LPW
134
123
115
107


MATREX SINGLE™ - SUSPENDED

DIMENSIONAL DIAGRAMS

PROFILE

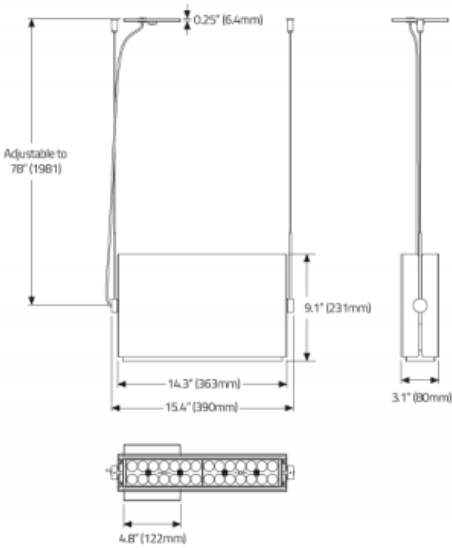

DIRECT

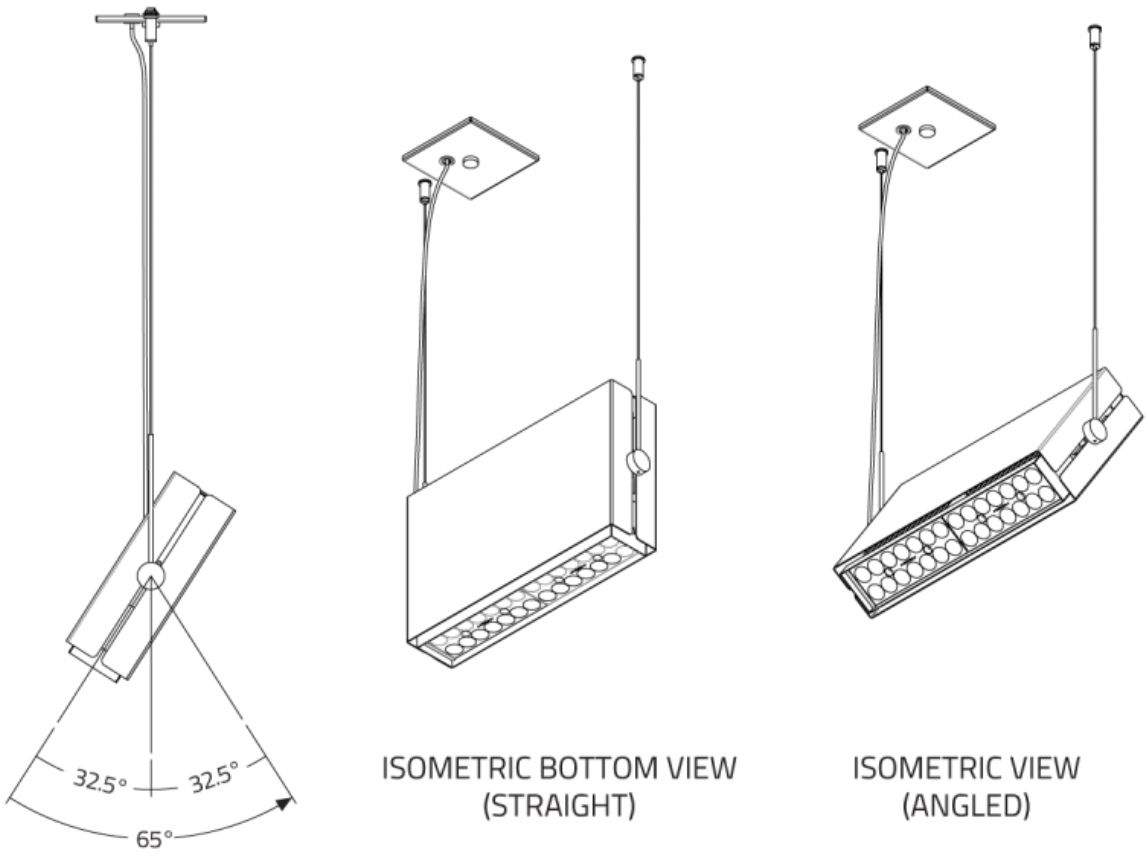


ISOMETRIC BOTTOM VIEW
(STRAIGHT)


ISOMETRIC VIEW
(ANGLED)

MATREX SINGLE™ - SUSPENDED

INDIRECT

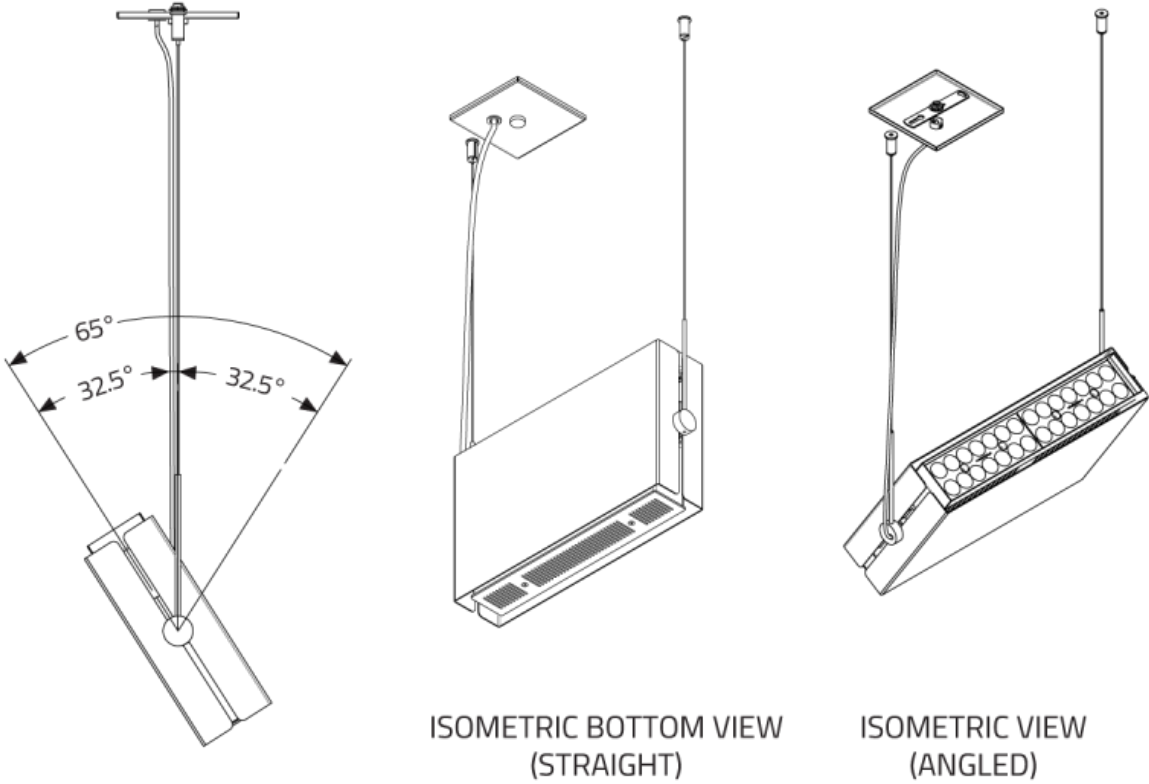


CANOPIES

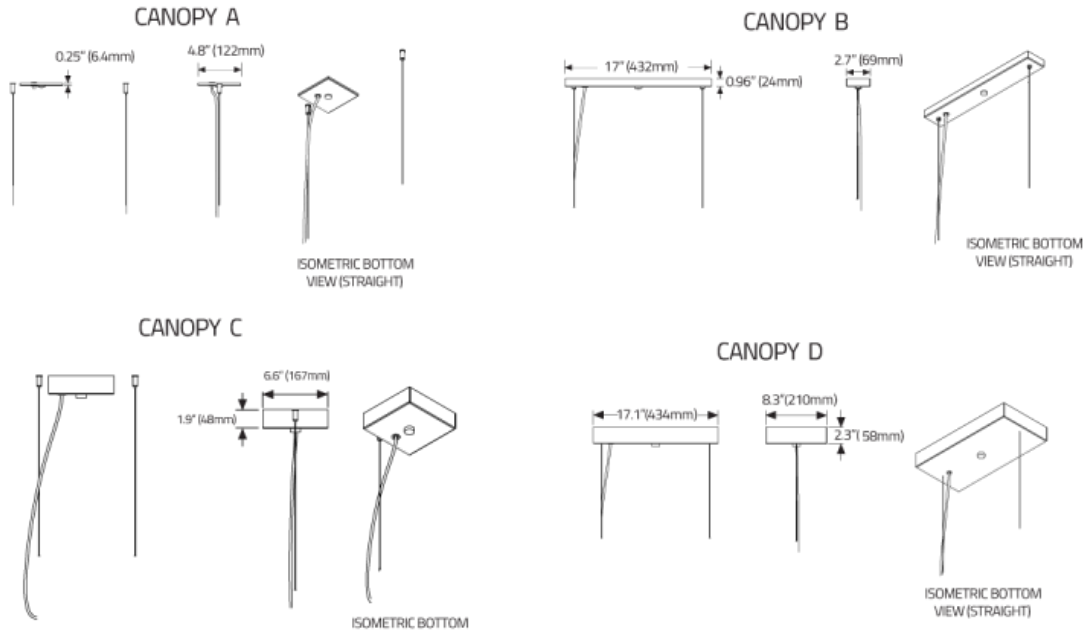


MATREX SINGLE™ - SUSPENDED

STANDARD SNOOT

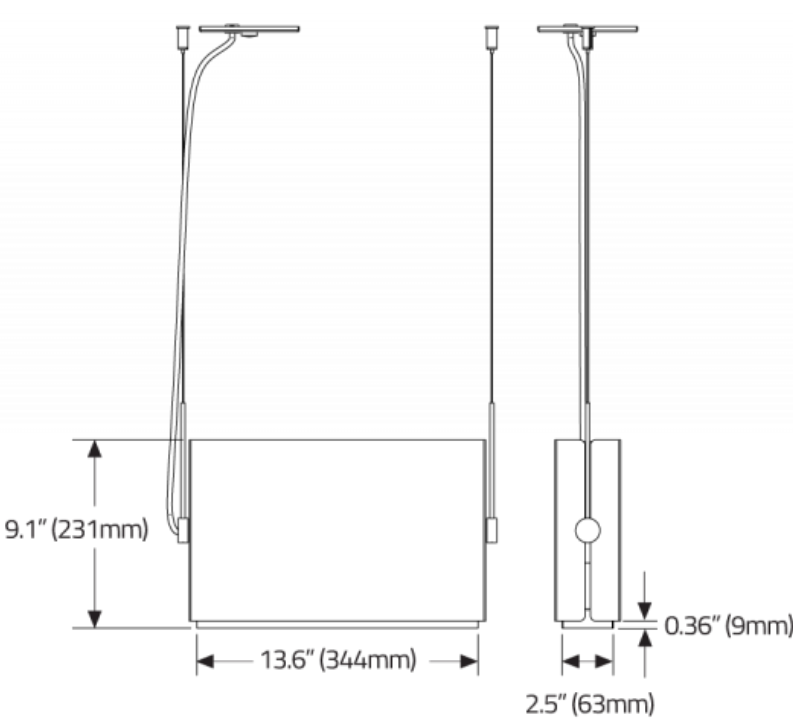


STANDARD SNOOT

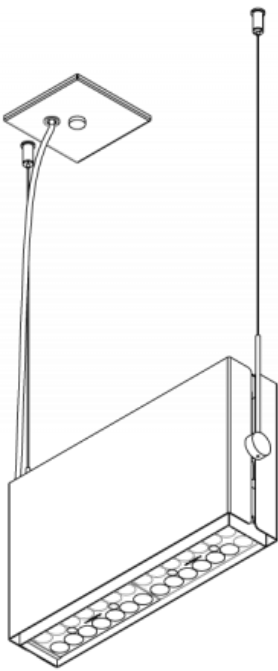

ISOMETRIC BOTTOM VIEW
(STANDARD SNOOT)

MATREX SINGLE™ - SUSPENDED


LONG SNOOT

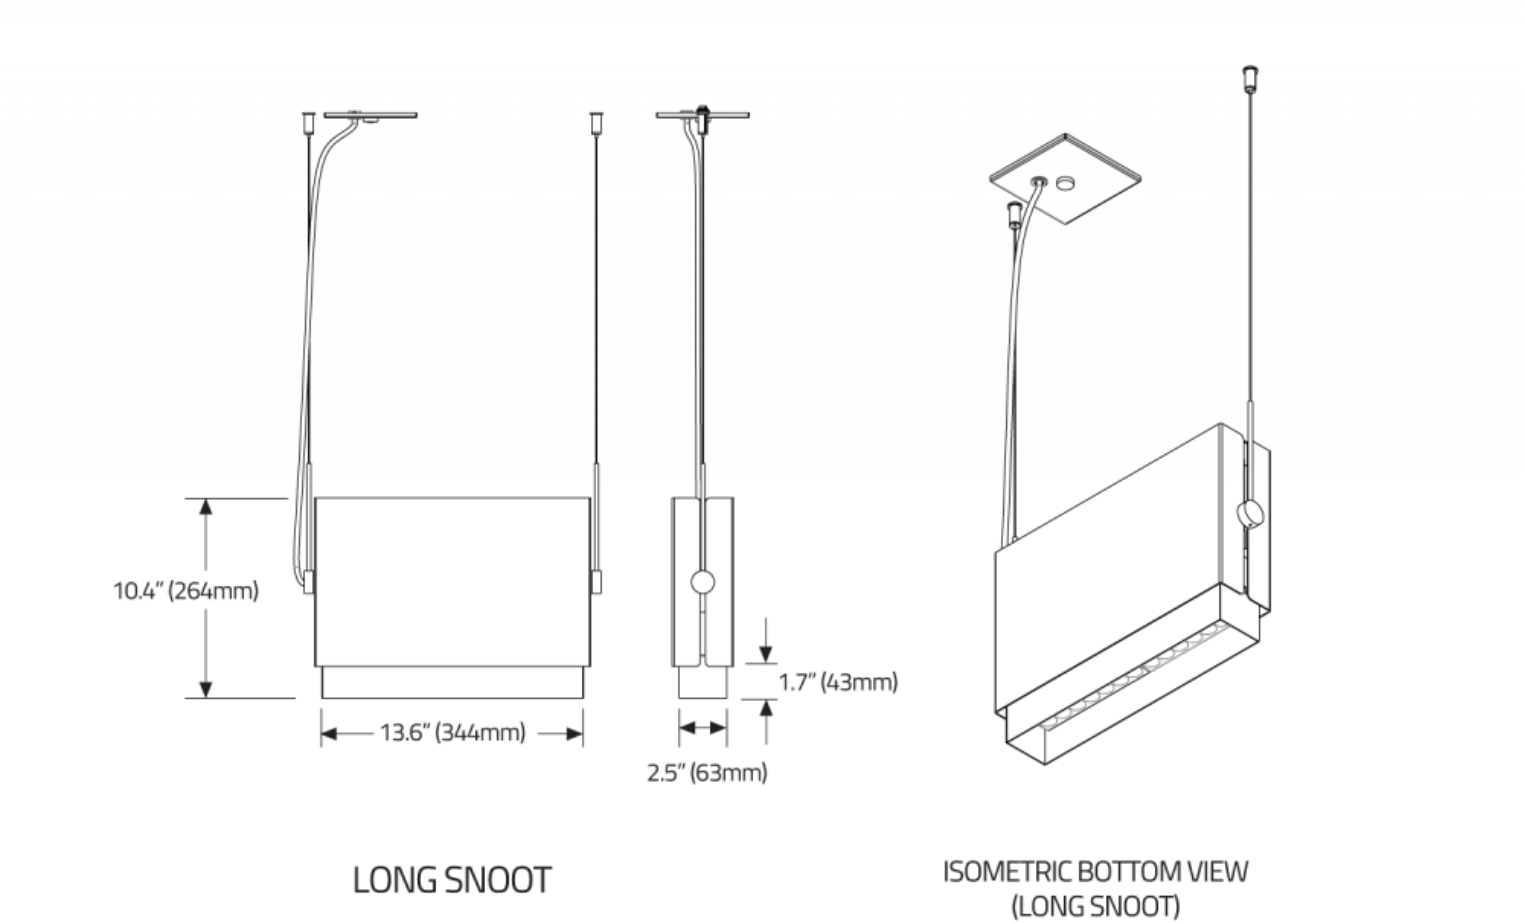

MATREX SINGLE™ - SUSPENDED

LOUVRES

HEX CELL LOUVRE

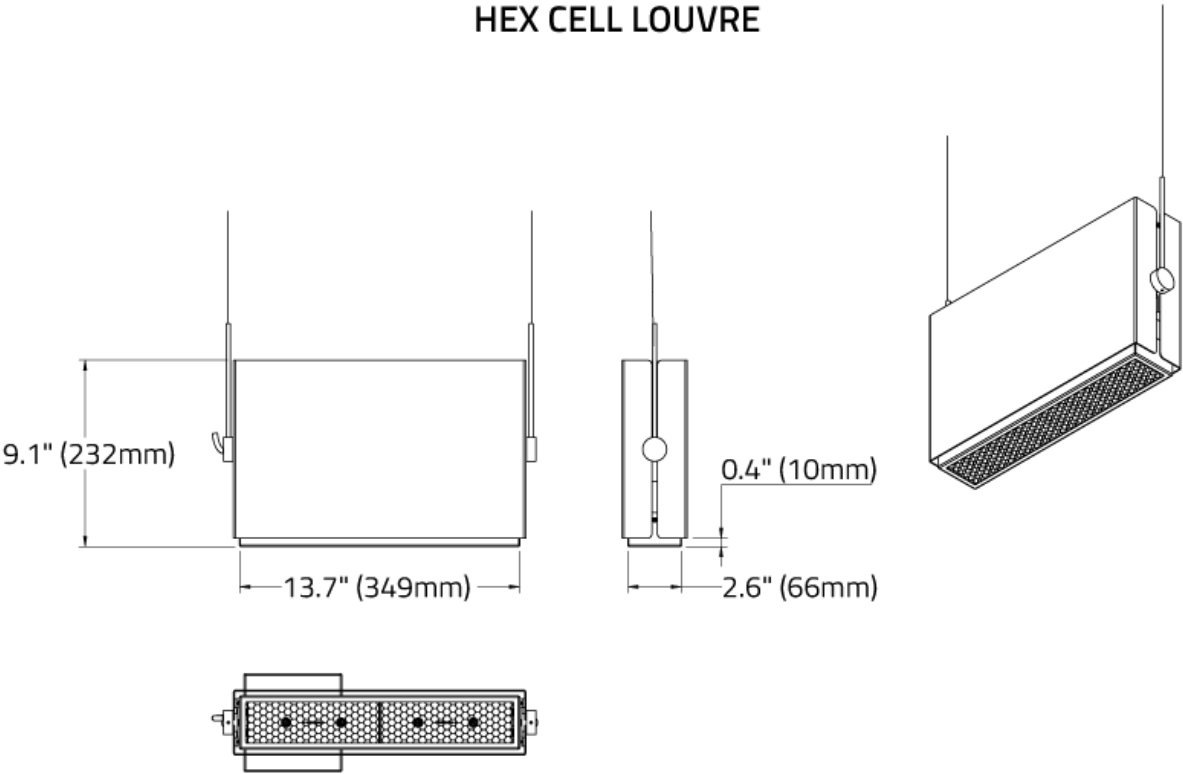

LADDER LOUVRE

