

MICRO CYLINDER 2.5™ - CEILING SURFACE



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINAIRE

MCYL2C12 12", 1700 lms

MCYL2C18 18", 1700 lms

MCYL2C24 24", 2200 lms

MCYL2C36 36", 2200 lms

Data shown based on 45° beam angle. See performance data page in the download section for 20° beam angle.

B. CRI

CR90 CRI 90+

C. CCT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

D. BEAM ANGLE

BA20 20°

BA45 45°

E. VOLTAGE

V1 120/277V

V2 240V¹

V3 347V²

¹ Not available in North America.

² Only available with DA01 dimming.

F. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%¹

DA02 0-10V Dimming 0.1%²

DA20 DALI Dimming 0.1%²

DA21 DALI Dimming 1.0%²

DA30 DSI/switchDim^{2 3}

¹ If V1 and DA01 are required in conjunction, the driver will be inside the junction box. For all other voltage and dimming options, the driver will be in a remote box.

² Not available with V3.

³ Not available in North America.

G. FIXTURE FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA27 Wood grain - Light Cherry¹

FA28 Wood grain - Dark Walnut¹

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

The canopy finish matches the fixture housing finish.

¹ Longer than normal lead times may apply, consult factory.

H. BEZEL FINISH

FB24 Black Anodized



FB58 Silver Anodized

FB59 Gold Anodized



MICRO CYLINDER 2.5™ - CEILING SURFACE

DIMENSIONAL DIAGRAMS

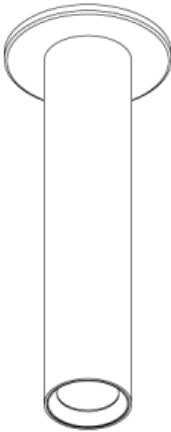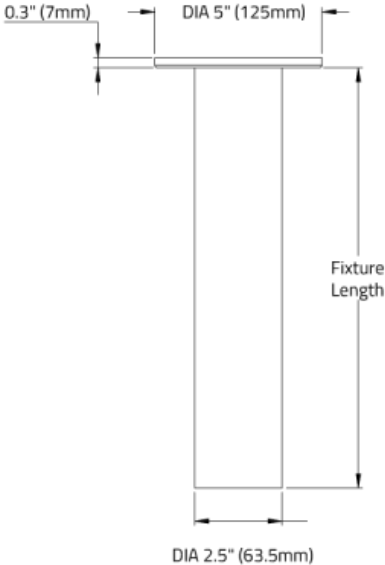

ISOMETRIC VIEW

Fixture Length:	(A)
12" (MCYL2C12)	12" (304.8mm)
18" (MCYL2C18)	18" (457.2mm)
24" (MCYL2C24)	24" (609.6mm)
36" (MCYL2C36)	36" (914.4mm)

