


MICRO CYLINDER 2.5™ - CEILING SURFACE



Project Name:	Fixture Type:
Fixture Code:	Quantities:

A. LUMINAIRE

MCYL2C12 12", 1700 lms	MCYL2C18 18", 1700 lms	MCYL2C24 24", 2200 lms	MCYL2C36 36", 2200 lms
------------------------	------------------------	------------------------	------------------------

Data shown based on 45° beam angle. See performance data page in the download section for 20° beam angle.

B. CRI

CR90 CRI 90+

C. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
-------------	-------------	-------------	-------------

D. BEAM ANGLE

BA20 20°	BA45 45°
----------	----------

E. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²
-------------	----------------------	----------------------

¹ Not available in North America.
² Only available with DA01 dimming.

F. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0% ¹	DA02 0-10V Dimming 0.1% ²	DA20 DALI Dimming 0.1% ²	DA21 DALI Dimming 1.0% ²
DA30 DSI/switchDim ^{2 3}			

¹ If V1 and DA01 are required in conjunction, the driver will be inside the junction box. For all other voltage and dimming options, the driver will be in a remote box.
² Not available with V3.
³ Not available in North America.

G. FIXTURE FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA25 Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹	FA28 Wood grain - Dark Walnut ¹	FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic
FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	FA52 Champagne Metallic	FA53 Red Metallic - Textured


The canopy finish matches the fixture housing finish.
¹ Longer than normal lead times may apply, consult factory.

H. BEZEL FINISH

FB24 Black Anodized	FB58 Silver Anodized	FB59 Gold Anodized
---------------------	----------------------	--------------------

MICRO CYLINDER 2.5™ - CEILING SURFACE

DIMENSIONAL DIAGRAMS

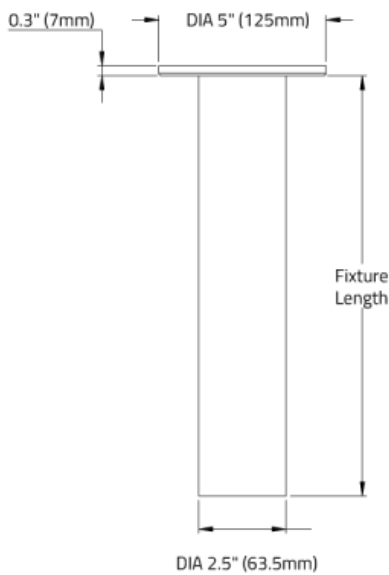

Fixture Length:	(A)
12" (MCYL2C12)	12" (304.8mm)
18" (MCYL2C18)	18" (457.2mm)
24" (MCYL2C24)	24" (609.6mm)
36" (MCYL2C36)	36" (914.4mm)

