

MICRO CYLINDER 2.5™ - SUSPENDED



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINAIRE

MCYL2P12 12", 1700 lms

MCYL2P18 18", 1700 lms

MCYL2P24 24", 2200 lms

MCYL2P36 36", 2200 lms

Data shown based on 45° beam angle. See performance data page in the download section for 20° beam angle.

B. CRI

CR90 CRI 90+

C. CCT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

D. BEAM ANGLE

BA20 20°

BA45 45°

E. VOLTAGE

V1 120/277V

V2 240V¹

V3 347V²

¹ Not available in North America.

² Only available with DA01 dimming.

F. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%¹

DA02 0-10V Dimming 0.1%²

DA20 DALI Dimming 0.1%²

DA21 DALI Dimming 1.0%²

DA30 DSI/switchDim^{2 3}

¹ If V1 and DA01 are required in conjunction, the driver will be inside the junction box. For all other voltage and dimming options, the driver will be in a remote box.

² Not available with V3.

³ Not available in North America.

G. FIXTURE FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA27 Wood grain - Light Cherry¹

FA28 Wood grain - Dark Walnut¹

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

H. CANOPY FINISH

CF01 White

CF02 Black Metallic - Textured

CF20 Silver Metallic - Textured

CF25 Gold Metallic - Textured

CF44 Midnight Blue Metallic - Textured

CF45 Copper Metallic

CF46 Charcoal Metallic - Textured

CF47 Bronze Metallic - Textured

CF52 Champagne Metallic

CF53 Red Metallic - Textured

I. BEZEL FINISH

FB24 Black Anodized

FB58 Silver Anodized

FB59 Gold Anodized



MICRO CYLINDER 2.5™ - SUSPENDED

J. SUSPENSION

HLA03 3ft cable suspension

HLA06 6ft cable suspension


HLA09 9ft cable suspension

Custom lengths up to 20ft are available, consult factory.



MICRO CYLINDER 2.5™ - SUSPENDED

DIMENSIONAL DIAGRAMS

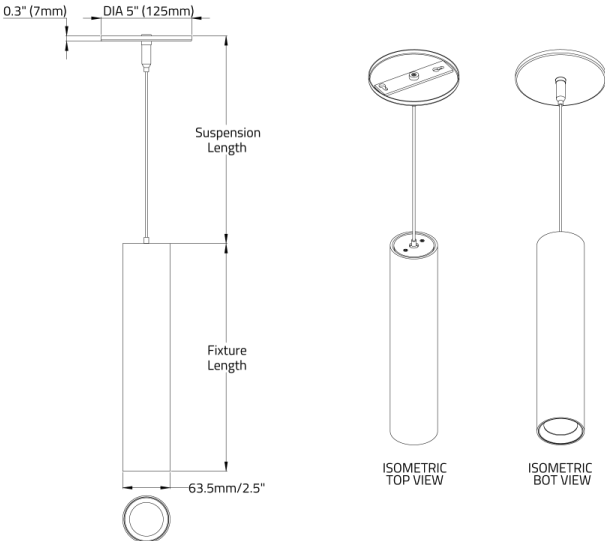

| Fixture Length: | (A) |
|-----------------|---------------|
| 12" (MCYL2P12) | 12" (304.8mm) |
| 18" (MCYL2P18) | 18" (457.2mm) |
| 24" (MCYL2P24) | 24" (609.6mm) |
| 36" (MCYL2P36) | 36" (914.4mm) |