

MICRO CYLINDER 1.5™ - SUSPENDED

Project Name:


Fixture Type:

Fixture Code:

Quantities:



MICRO CYLINDER 1.5™ - SUSPENDED

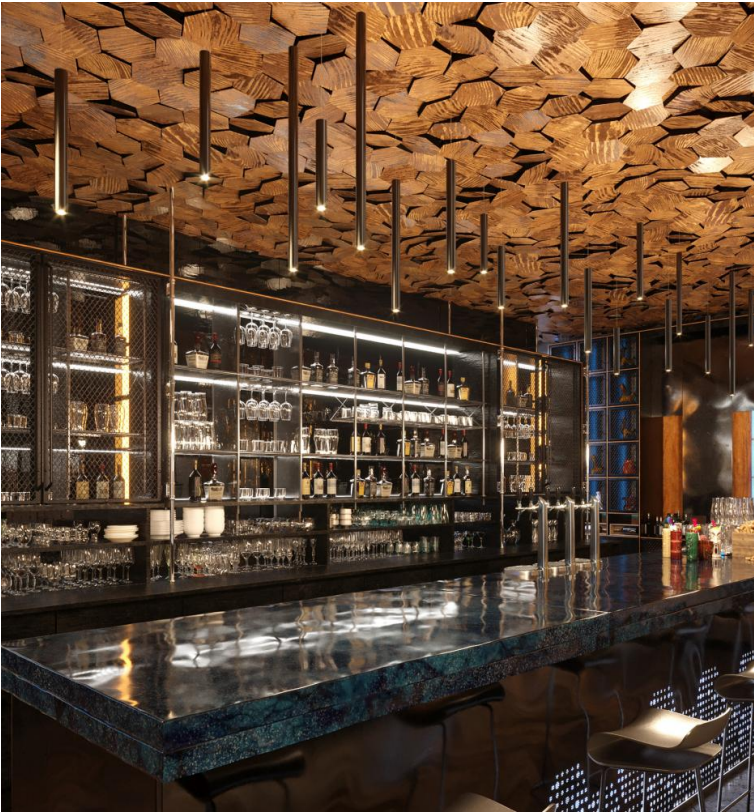

MICRO CYLINDER 1.5™ - SUSPENDED

Micro Cylinder dabs elegance to minimalism. Lustrous anodized bezels revamp a modest shape into a dashing pendant. With lengths ranging from 12" to 36", Micro Cylinder lends itself to large-scale cascades without being obtrusive or overwhelming to a space. The light output is optimized according to the length of the cylinder allowing more lumen package options for various performance requirements. Regressed optics combined with bezels and a slender profile offer visual and aesthetic comfort.

GENERAL SPECIFICATION

Body

Extruded aluminum.

Suspension/power cable

Power over aircraft cable.

Driver

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture canopy.

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 90+.

Reported L70 @25°C (77°F)

> 55,000 hrs

Approvals

Damp Rated.

Finish

Powder coated.

Bezel

Silver, black or gold anodized.

Mechanical

Luminaires mount directly over J box (by others).

Sensors

Consult factory regarding sensor compatibility.


Estimated L70 @25°C (77°F)

> 200,000 hrs

Design

US Design Patent Pending.

MOUNTING & OPTICS

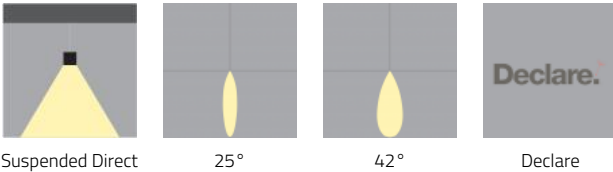

Suspended Direct

25°

42°

Declare

MICRO CYLINDER 1.5™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

MCYL1P12 12", 800 lms

MCYL1P18 18", 800 lms

MCYL1P24 24", 900 lms

MCYL1P36 36", 900 lms

Data shown based on 42° beam angle. See performance data page in the download section for 25° beam angle.

B. CRI

CR90 CRI 90+

C. CCT

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

D. BEAM ANGLE

BA25 25°

BA42 42°

E. VOLTAGE

V1 120/277V

V2 240V¹

V3 347V²

¹ Not available in North America.

² Only available with DA01 dimming.

F. DIMMING

DA01 0-10V Dimming 1.0%¹

DA02 0-10V Dimming 0.1%²

DA20 DALI Dimming 0.1%²

DA21 DALI Dimming 1.0%²

DA30 DSI/switchDim^{2 3}

¹ If V1 and DA01 are required in conjunction, the driver will be inside the junction box. For all other voltage and dimming options, the driver will be in a remote box.

² Not available with V3.

³ Not available in North America.

G. FIXTURE FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA27 Wood grain - Light Cherry¹

FA28 Wood grain - Dark Walnut¹

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

H. CANOPY FINISH

CF01 White

CF02 Black Metallic - Textured

CF20 Silver Metallic - Textured

CF25 Gold Metallic - Textured

CF44 Midnight Blue Metallic - Textured

CF45 Copper Metallic

CF46 Charcoal Metallic - Textured

CF47 Bronze Metallic - Textured

CF52 Champagne Metallic

CF53 Red Metallic - Textured

I. BEZEL FINISH

FB24 Black Anodized

FB58 Silver Anodized

FB59 Gold Anodized

J. SUSPENSION

HLA03 3ft cable suspension

HLA06 6ft cable suspension

HLA09 9ft cable suspension

Custom lengths up to 20ft are available, consult factory.



MICRO CYLINDER 1.5™ - SUSPENDED

TECHNICAL DATA

LUMINAIRE


Data shown based on 42° beam angle. See performance data page in the download section for 25° beam angle.

Code	MCYL1P12	MCYL1P18	MCYL1P24	MCYL1P36
Length	12"	18"	24"	36"
Wattage	17	17	20	20
Delivered lms	800	800	900	900
LPW	45	45	44	44

FIXTURE FINISH



White




Black Metallic -
Textured



Silver Metallic -
Textured



Gold Metallic -
Textured



Wood grain - Light
Cherry ¹




Wood grain - Dark
Walnut ¹



Midnight Blue Metallic -
Textured



Copper Metallic



Charcoal Metallic -
Textured



Bronze Metallic -
Textured




Champagne Metallic




Red Metallic -
Textured

¹ Longer than normal lead times may apply, consult factory.

CANOPY FINISH



White




Black Metallic -
Textured




Silver Metallic -
Textured




Gold Metallic -
Textured



Midnight Blue Metallic -
Textured




Copper Metallic



Charcoal Metallic -
Textured



Bronze Metallic -
Textured



Champagne Metallic



Red Metallic -
Textured

MICRO CYLINDER 1.5™ - SUSPENDED

BEZEL FINISH



Black Anodized



Silver Anodized



Gold Anodized

APPROVALS



MICRO CYLINDER 1.5™ - SUSPENDED


PERFORMANCE DATA

BEAM 25°	LENGTH	DELIVERED LUMENS	WATTS / LPW
	12:	700	17 / 43
	18"	700	17 / 43
	24"	800	20 / 43
	36"	800	20 / 43

BEAM 42°	LENGTH	DELIVERED LUMENS	WATTS / LPW
	12:	800	17 / 45
	18"	800	17 / 45
	24"	900	20 / 44
	36"	900	20 / 44

MICRO CYLINDER 1.5™ - SUSPENDED

DIMENSIONAL DIAGRAMS

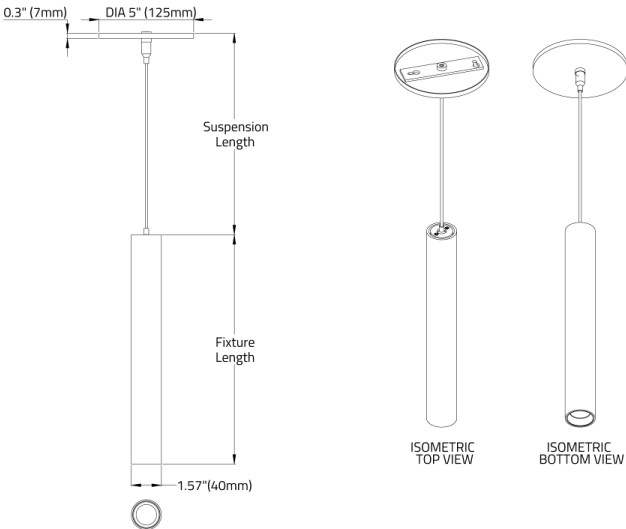

Fixture Length:	(A)
12" (MCYL1P12)	12" (304.8mm)
18" (MCYL1P18)	18" (457.2mm)
24" (MCYL1P24)	24" (609.6mm)
36" (MCYL1P36)	36" (914.4mm)

ISOMETRIC TOP VIEW

ISOMETRIC BOTTOM VIEW