

MICRO ELLIPSE II™ - WALL OR CEILING SURFACE



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINAIRE

METC1C03 3ft, 2300 lms

METC1C04 4ft, 3200 lms

METC1C05 5ft, 4100 lms

METC1C06 6ft, 4800 lms

B. LUMENS

LMA17 175 lm/ft

LMA26 260 lm/ft

LMA35 350 lm/ft

¹ 50% of total output.

² 75% of total output.

³ 100% total output.

C. CRI

CR80 CRI 80+

CR90 CRI 90+

D. CCT

CTA27 2700K ¹

CTA30 3000K

CTA35 3500K

CTA40 4000K

¹ Longer than normal lead times may apply, consult factory.

E. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

V4 Low Voltage ³

¹ Not available in North America.

² Available with DA01 dimming only.

³ Available with DA45 dimming only.

F. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

DA45 PoE ²

¹ Not available with V3.

² Available with V4 only.

G. FIXTURE FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic - Textured

FA25 Gold Metallic - Textured

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

H. EMERGENCY



E0 Not required

E2 Emergency system - Remote



MICRO ELLIPSE II™ - WALL OR CEILING SURFACE

DIMENSIONAL DIAGRAMS

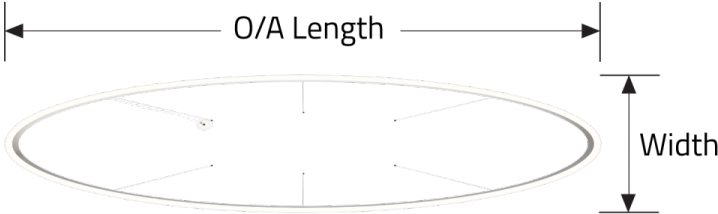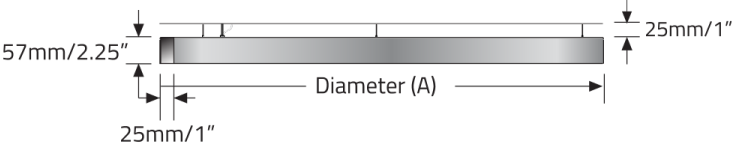

- O/A Length X Width:**
- 914mm/36" X 406mm/16"
 - 1219mm/48" X 483mm/19"
 - 1524mm/60" X 559mm/22"
 - 1829mm/72" X 635mm/25"