

# MICRO FLARE™ - CONTINUOUS

Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

**MFLR1P** Direct

**MFLR2P** Direct/Indirect

All data based on max values, consult Performance Data download for more details.  
One power cord for every 50 linear feet.

## B. LENGTH OF RUN

SFA \_ \_ \_ \_

Order in 2ft increments starting at 4ft

## C. MAX LENGTH PER SECTION

**SL04** 4ft

**SL06** 6ft

**SL08** 8ft

**SL10** 10ft

**SL12** 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (3658mm) is selected, we would provide 4 3048mm segments. For special requirements, please contact [sales@betacalco.com](mailto:sales@betacalco.com).

\* Total length = length of run + 2.35in

## D. LM/FT (DIRECT)

**LPF010** 100 lm/ft

**LPF020** 200 lm/ft

**LPF030** 300 lm/ft

**LPF040** 400 lm/ft

## E. LM/FT (INDIRECT)

**LPG000** Not required

**LPG020** 200 lm/ft

**LPG040** 400 lm/ft

**LPG060** 600 lm/ft

**LPG080** 800 lm/ft

**LPG100** 1000 lm/ft

**LPG120** 1200 lm/ft

**LPG140** 1400 lm/ft

## F. CRI

**CR90** CRI 90+

## G. CCT

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

## H. DIRECT DIFFUSER

**DD3** Diffused Light Diffuser

## I. UPLIGHT DIFFUSER

**UD0** Not required

**UD1** Clear diffuser (Batwing distribution) **UD3** Asymmetric diffuser <sup>1</sup>

<sup>1</sup> Available up to 1000 lms/ft.

## J. UPLIGHT BLACKOUT PLATE

**UB00** Not required

**UB\_ \_** Blackout plate <sup>1</sup>

<sup>1</sup> Available on a per foot basis. May be required to prevent lighting up of duct work in loft style applications.

# MICRO FLARE™ - CONTINUOUS

## K. VOLTAGE

**V1** 120/277V

**V2** 240V<sup>1</sup>

**V3** 347V<sup>2</sup>

**V4** Low Voltage<sup>3</sup>

<sup>1</sup> Not available in North America.

<sup>2</sup> Only available with DA01 dimming.

<sup>3</sup> Only available with DA45 dimming.

## L. DIMMING

**DA01** 0-10V Dimming 1.0%

**DA02** 0-10V Dimming 0.1%<sup>1</sup>

**DA20** DALI Dimming 0.1%<sup>1</sup>

**DA21** DALI Dimming 1.0%<sup>1</sup>

**DA30** DSI/switchDim<sup>2</sup>

**DA45** PoE<sup>3</sup>

<sup>1</sup> Not available with V3.

<sup>2</sup> Not available in North America.

<sup>3</sup> Only available with V4.

## M. CEILING TYPE

**G1** Grid ceiling<sup>1</sup>

**H1** Hard ceiling<sup>2</sup>

<sup>1</sup> Combo kit includes installation to T-bar and through tile mount.

<sup>2</sup> Designed for drywall ceilings.

## N. SUSPENSION

**HLA03** 3ft cable suspension

**HLA06** 6ft cable suspension

**HLA09** 9ft cable suspension

## O. FIXTURE FINISH

**FA01** White - Textured

**FA02** Black Metallic - Textured

**FA20** Silver Metallic - Textured

**FA53** Red Metallic Textured

## P. INSIDE TRIM FINISH

**FB01** White

**FB02** Black Metallic - Textured

**FB20** Silver Metallic - Textured

**FB25** Gold Metallic - Textured

**FB53** Red Metallic - Textured

## Q. CANOPY FINISH

**CF01** White

**CF02** Black Metallic - Textured

**CF20** Silver Metallic - Textured

**CF53** Red Metallic Textured

## R. EMERGENCY

**E0** Not required

**E2** Emergency system - Remote<sup>1</sup>

**E3** Emergency generated circuit<sup>2</sup>

<sup>1</sup> Only available with 0-10V 1% dimming. An extra power cord will be supplied to each section of the fixture when ordering emergency.

<sup>2</sup> Available upon request, consult factory for details. Not available with 347V.

## S. CIRCUITS


**CS1** Single circuit

**CS2** Dual circuit<sup>1</sup>


## T. SENSORS

# MICRO FLARE™ - CONTINUOUS

## DIMENSIONAL DIAGRAMS

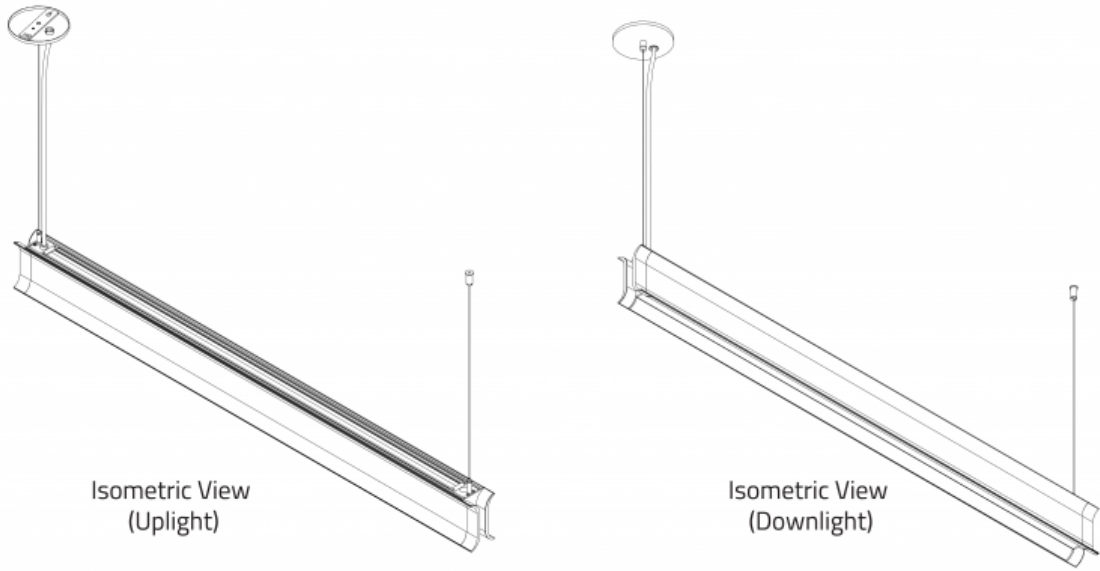

Top View (Uplight)

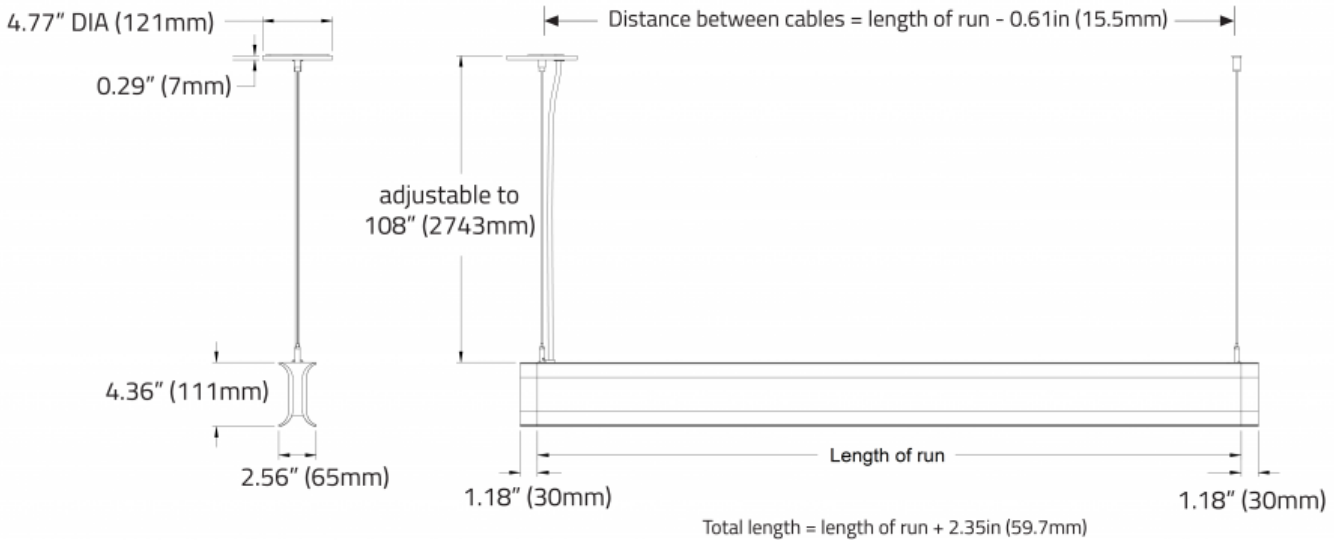

Bottom View (Downlight)