






MICRO FLARE™


SHORT SPECIFICATION SHEET

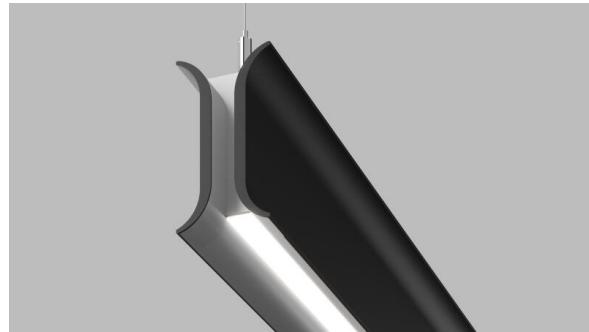

Fixture Type



Fixture Code



Quantities

1 HOW TO ORDER

1. LUMINAIRE

MFLR1P Direct

MFLR2P Direct/Indirect

All data based on max values, consult Performance Data download for more details. One power cord for every 50 linear feet.

2. LENGTH OF RUN

Order in 2' increments starting at 4'. For runs over 50' in length, consult factory.

SFA_---

Order in 2' increments starting at 4'. For runs over 50' in length, consult factory.

3. MAX LENGTH PER SECTION

SL04 4ft

SL06 6ft

SL08 8ft

SL10 10ft

SL12 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (3658mm) is selected, we would provide 4 3048mm segments. For special requirements, please contact sales@betacalco.com.

* Total length = length of run + 2.35in

4. LM/FT (DIRECT)

LPF010 100 lm/ft **LPF020** 200 lm/ft **LPF030** 300 lm/ft **LPF040** 400 lm/ft

5. LM/FT (INDIRECT)

LPG000 Not required **LPG020** 200 lm/ft **LPG040** 400 lm/ft **LPG060** 600 lm/ft
LPG080 800 lm/ft **LPG100** 1000 lm/ft **LPG120** 1200 lm/ft **LPG140** 1400 lm/ft

6. CRI

CR90 CRI 90+

7. CCT

CTA27 2700K **CTA30** 3000K **CTA35** 3500K **CTA40** 4000K

8. DIRECT LENS

DD3 Diffused Light

9. INDIRECT LENS

UD0 Not required **UD1** Clear (Batwing distribution) **UD3** Asymmetric ¹

¹ Available up to 1000 lms/ft.

10. INDIRECT BLACKOUT PLATE

UB00 Not required **UB_** Blackout plate ¹

¹ Available on a per foot basis. May be required to prevent lighting up of duct work in loft style applications.

11. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ Not available in North America. ² Only available with DA01 dimming. ³ Only available with DA45 dimming.

12. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with V3. ² Not available in North America. ³ Only available with V4.

13. CEILING TYPE**G1** Grid ceiling ¹ **H1** Hard ceiling ²¹ Combo kit includes installation to T-bar and through tile mount. ² Designed for drywall ceilings.**14. SUSPENSION****HLA03** 3ft cable suspension **HLA06** 6ft cable suspension **HLA09** 9ft cable suspension**15. FIXTURE FINISH****FA01** White - Textured **FA02** Black Metallic - Textured **FA20** Silver Metallic - Textured **FA53** Red Metallic Textured**16. INSIDE TRIM FINISH****FB01** White **FB02** Black Metallic - Textured **FB20** Silver Metallic - Textured **FB25** Gold Metallic - Textured
FB53 Red Metallic - Textured**17. CANOPY FINISH****CF01** White **CF02** Black Metallic - Textured **CF20** Silver Metallic - Textured **CF53** Red Metallic Textured**18. EMERGENCY****E0** Not required **E2** Emergency system - Remote ¹ **E3** Emergency generated circuit ²¹ Only available with 0-10V 1% dimming. An extra power cord will be supplied to each section of the fixture when ordering emergency.² Available upon request, consult factory for details. Not available with 347V.**19. CIRCUITS****CS1** Single circuit **CS2** Dual circuit ¹**20. SENSORS**

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.