


# MICRO QUAD DE™ - SURFACE



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE LENGTH

<b>982510</b> 25", 2510 lms	<b>982520</b> 36", 3764 lms	<b>982530</b> 48", 5018 lms	<b>982540</b> 60", 6272 lms
<b>982550</b> 72", 7528 lms	<b>982560</b> 84", 8782 lms		

Calculate total lumens and wattage by adding the Length lumens to the Width lumens. For example: 36" length + 48" width = 3584 + 4780 = 8364 total lumens.

## B. WIDTH

<b>W25</b> 25", 2390 lms	<b>W36</b> 36", 3584 lms	<b>W48</b> 48", 4780 lms	<b>W60</b> 60", 5974 lms
<b>W72</b> 72", 7168 lms	<b>W84</b> 84", 8364 lms		

## C. CCT/COLOR (OUTSIDE)

<b>T27</b> 2700K (min 80 CRI) <sup>1</sup>	<b>T30</b> 3000K (min 80 CRI)	<b>T35</b> 3500K (min 80 CRI)	<b>T40</b> 4000K (min 80 CRI)
<b>TRD</b> Red	<b>TGN</b> Green	<b>TBL</b> Blue	

CR90 (CRI 90+) available upon request, consult factory.

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## D. CCT/COLOR (INSIDE)

<b>S27</b> 2700K (min 80 CRI) <sup>1</sup>	<b>S30</b> 3000K (min 80 CRI)	<b>S35</b> 3500K (min 80 CRI)	<b>S40</b> 4000K (min 80 CRI)
<b>SRD</b> Red	<b>SGN</b> Green	<b>SBL</b> Blue	

CR90 (CRI 90+) available upon request, consult factory.

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## E. DIMMING (REMOTE ONLY)

<b>D1</b> 0-10V Dimming 1.0%	<b>D4</b> DALI Dimming 0.1%	<b>D5</b> DALI Dimming 1.0%	<b>DA45</b> PoE
------------------------------	-----------------------------	-----------------------------	-----------------

0-10V, 1% dimming standard.

DA45 must be used with EV only.

## F. FINISH

<b>WH</b> White	<b>BL</b> Black Metallic Textured	<b>MS</b> Silver Metallic Textured	<b>FA25</b> Gold Metallic - Textured
<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic	<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured
<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured		

## G. LUMEN & WATTAGE REDUCTION

<b>PRO</b> Lumen & Wattage Reduction to approximately 25% of standard output	<b>PR1</b> Lumen & Wattage Reduction to approximately 50% of standard output	<b>PR2</b> Lumen & Wattage Reduction to approximately 75% of standard output
--	--	--

PRO is not available with 982510. Custom reduction percentages available upon request.

# MICRO QUAD DE™ - SURFACE

## H. SURFACE MOUNTING KITS

**BJ3** Surface mounting kit 1.25"  
extension c/w 4 spacers

**BK3** Surface mounting kit 2.75"  
extension c/w 4 spacers

---

Note: BJ3 is standard, BK3 is optional

## I. OPTIONAL LOW VOLTAGE

**EV** Low Voltage


---

To be used with DA45 only.




# MICRO QUAD DE™ - SURFACE

## DIMENSIONAL DIAGRAMS

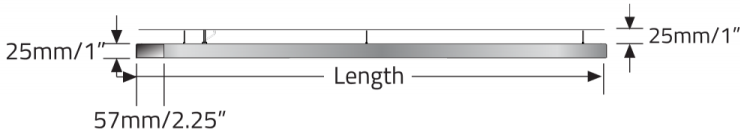

**Note:** The diffuser protrudes by 4.8mm/0.19"

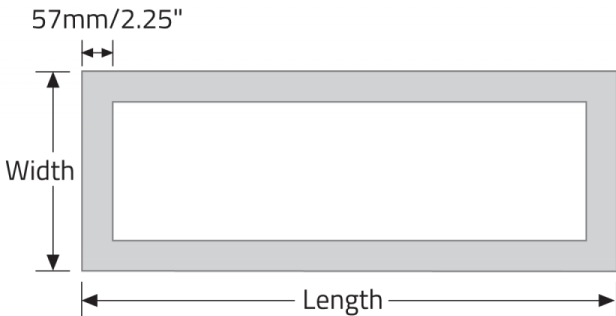

**Note:** The diffuser protrudes by 4.8mm/0.19"