


MICRO QUAD DE™ - SURFACE



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINAIRE LENGTH

982510 25", 2510 lms	982520 36", 3764 lms	982530 48", 5018 lms	982540 60", 6272 lms
982550 72", 7528 lms	982560 84", 8782 lms		

Calculate total lumens and wattage by adding the Length lumens to the Width lumens. For example: 36" length + 48" width = 3584 + 4780 = 8364 total lumens.

B. WIDTH

W25 25", 2390 lms	W36 36", 3584 lms	W48 48", 4780 lms	W60 60", 5974 lms
W72 72", 7168 lms	W84 84", 8364 lms		

C. CCT/COLOR (OUTSIDE)

T27 2700K (min 80 CRI) ¹	T30 3000K (min 80 CRI)	T35 3500K (min 80 CRI)	T40 4000K (min 80 CRI)
TRD Red	TGN Green	TBL Blue	

CR90 (CRI 90+) available upon request, consult factory.

¹ Longer than normal lead times may apply, consult factory.

D. CCT/COLOR (INSIDE)

S27 2700K (min 80 CRI) ¹	S30 3000K (min 80 CRI)	S35 3500K (min 80 CRI)	S40 4000K (min 80 CRI)
SRD Red	SGN Green	SBL Blue	

CR90 (CRI 90+) available upon request, consult factory.

¹ Longer than normal lead times may apply, consult factory.

E. DIMMING (REMOTE ONLY)

D1 0-10V Dimming 1.0%	D4 DALI Dimming 0.1%	D5 DALI Dimming 1.0%	DA45 PoE
------------------------------	-----------------------------	-----------------------------	-----------------

0-10V, 1% dimming standard.

DA45 must be used with EV only.

F. FINISH

WH White	BL Black Metallic Textured	MS Silver Metallic Textured	FA25 Gold Metallic - Textured
FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured
FA52 Champagne Metallic	FA53 Red Metallic - Textured		

G. LUMEN & WATTAGE REDUCTION

PRO Lumen & Wattage Reduction to approximately 25% of standard output	PR1 Lumen & Wattage Reduction to approximately 50% of standard output	PR2 Lumen & Wattage Reduction to approximately 75% of standard output
--	--	--

PRO is not available with 982510. Custom reduction percentages available upon request.

MICRO QUAD DE™ - SURFACE

H. SURFACE MOUNTING KITS

BJ3 Surface mounting kit 1.25"
extension c/w 4 spacers

BK3 Surface mounting kit 2.75"
extension c/w 4 spacers

Note: BJ3 is standard, BK3 is optional


I. OPTIONAL LOW VOLTAGE

EV Low Voltage


To be used with DA45 only.

MICRO QUAD DE™ - SURFACE

DIMENSIONAL DIAGRAMS

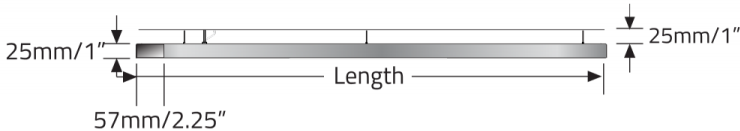

Note: The diffuser protrudes by 4.8mm/0.19"

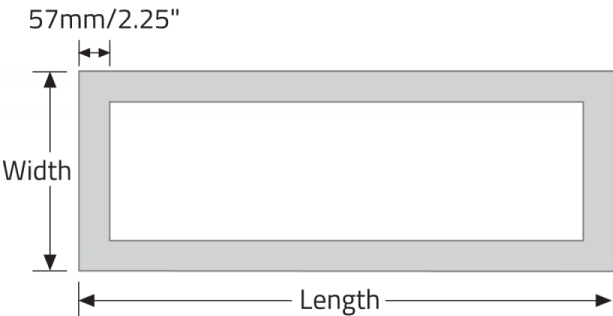

Note: The diffuser protrudes by 4.8mm/0.19"