


MICRO QUAD II™ - SURFACE



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINARIE LENGTH

983610 24", Direct, 1650 lms	983620 36", Direct, 2474 lms	983630 48", Direct, 3300 lms	983640 60", Direct, 4124 lms
983650 71", Direct, 4948 lms	983660 83", Direct, 5774 lms	983710 24", Direct/Indirect, 2018 lms	983720 36", Direct/Indirect, 3026 lms
983730 48", Direct/Indirect, 4034 lms	983740 60", Direct/Indirect, 5044 lms	983750 71", Direct/Indirect, 6052 lms	983760 83", Direct/Indirect, 7060 lms

Calculate total lumens and wattage by adding the Length lumens to the Width lumens. For example: direct only 36" length + 48" width = 2474 + 4034 = 6508 total lumens.

B. WIDTH

WD24 24", Direct, 1650 lms	WD36 36", Direct, 2474 lms	WD48 48", Direct, 3300 lms	WD60 60", Direct, 4124 lms
WD71 71", Direct, 4948 lms	WD83 83", Direct, 5774 lms	WDI24 24", Direct/Indirect, 3356 lms	WDI36 36", Direct/Indirect, 3026 lms
WDI48 48", Direct/Indirect, 4034 lms	WDI60 60", Direct/Indirect, 5044 lms	WDI71 71", Direct/Indirect, 6052 lms	WDI83 83", Direct/Indirect, 11746 lms

C. CCT/COLOR (DIRECT)

D27 2700K (min 80 CRI) ¹	D30 3000K (min 80 CRI)	D35 3500K (min 80 CRI)	D40 4000K (min 80 CRI)
DRD Red	DGN Green	DBL Blue	

CR90 (CRI 90+) available upon request, consult factory.

¹ Longer than normal lead times may apply, consult factory.

D. CCT/COLOR (INDIRECT)

N27 2700K (min 80 CRI) ¹	N30 3000K (min 80 CRI)	N35 3500K (min 80 CRI)	N40 4000K (min 80 CRI)
NRD Red	NGN Green	NBL Blue	

CR90 (CRI 90+) available upon request, consult factory.

¹ Longer than normal lead times may apply, consult factory.

E. DIMMING

D1 0-10V Dimming 1.0%	D4 DALI Dimming 0.1%	D5 DALI Dimming 1.0%	DA45 PoE
------------------------------	-----------------------------	-----------------------------	-----------------

D4 & D5 not available with 983750 or 983760.

DA45 must be used with EV only.

F. FINISH

WH White	BL Black Metallic Textured	MS Silver Metallic Textured	FA25 Gold Metallic - Textured
FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic	FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured
FA52 Champagne Metallic	FA53 Red Metallic - Textured		

G. LUMEN & WATTAGE REDUCTION (DIRECT ILLUMINATION ONLY)

PR1 Lumen & Wattage Reduction to approximately 50% of standard output	PR2 Lumen & Wattage Reduction to approximately 75% of standard output
--	--

PR1 is not available with 983610. Lumen reduction available for direct light only. Custom reduction percentages available upon request.



MICRO QUAD II™ - SURFACE

H. OPTIONAL LOW VOLTAGE


EV Low Voltage

To be used with DA45 only.




MICRO QUAD II™ - SURFACE

DIMENSIONAL DIAGRAMS

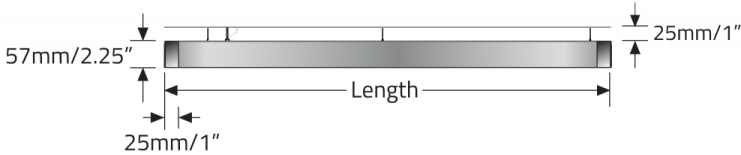

Note: The diffuser protrudes by 4.8mm/0.19"

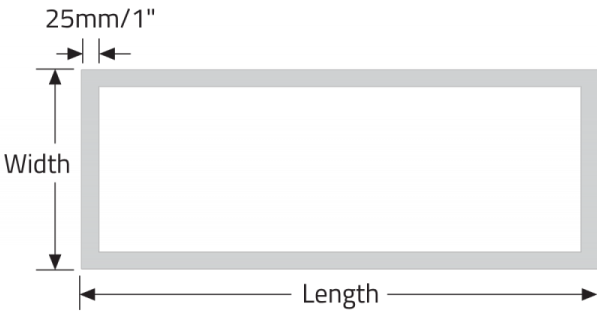

Note: The diffuser protrudes by 4.8mm/0.19"