


# MICRO QUAD II™ - SURFACE



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINARIE LENGTH

<b>983610</b> 24", Direct, 1650 lms	<b>983620</b> 36", Direct, 2474 lms	<b>983630</b> 48", Direct, 3300 lms	<b>983640</b> 60", Direct, 4124 lms
<b>983650</b> 71", Direct, 4948 lms	<b>983660</b> 83", Direct, 5774 lms	<b>983710</b> 24", Direct/Indirect, 2018 lms	<b>983720</b> 36", Direct/Indirect, 3026 lms
<b>983730</b> 48", Direct/Indirect, 4034 lms	<b>983740</b> 60", Direct/Indirect, 5044 lms	<b>983750</b> 71", Direct/Indirect, 6052 lms	<b>983760</b> 83", Direct/Indirect, 7060 lms

Calculate total lumens and wattage by adding the Length lumens to the Width lumens. For example: direct only 36" length + 48" width = 2474 + 4034 = 6508 total lumens.

## B. WIDTH

<b>WD24</b> 24", Direct, 1650 lms	<b>WD36</b> 36", Direct, 2474 lms	<b>WD48</b> 48", Direct, 3300 lms	<b>WD60</b> 60", Direct, 4124 lms
<b>WD71</b> 71", Direct, 4948 lms	<b>WD83</b> 83", Direct, 5774 lms	<b>WDI24</b> 24", Direct/Indirect, 3356 lms	<b>WDI36</b> 36", Direct/Indirect, 3026 lms
<b>WDI48</b> 48", Direct/Indirect, 4034 lms	<b>WDI60</b> 60", Direct/Indirect, 5044 lms	<b>WDI71</b> 71", Direct/Indirect, 6052 lms	<b>WDI83</b> 83", Direct/Indirect, 11746 lms

## C. CCT/COLOR (DIRECT)

<b>D27</b> 2700K (min 80 CRI) <sup>1</sup>	<b>D30</b> 3000K (min 80 CRI)	<b>D35</b> 3500K (min 80 CRI)	<b>D40</b> 4000K (min 80 CRI)
<b>DRD</b> Red	<b>DGN</b> Green	<b>DBL</b> Blue	

CR90 (CRI 90+) available upon request, consult factory.

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## D. CCT/COLOR (INDIRECT)

<b>N27</b> 2700K (min 80 CRI) <sup>1</sup>	<b>N30</b> 3000K (min 80 CRI)	<b>N35</b> 3500K (min 80 CRI)	<b>N40</b> 4000K (min 80 CRI)
<b>NRD</b> Red	<b>NGN</b> Green	<b>NBL</b> Blue	

CR90 (CRI 90+) available upon request, consult factory.

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## E. DIMMING

<b>D1</b> 0-10V Dimming 1.0%	<b>D4</b> DALI Dimming 0.1%	<b>D5</b> DALI Dimming 1.0%	<b>DA45</b> PoE
------------------------------	-----------------------------	-----------------------------	-----------------

D4 & D5 not available with 983750 or 983760.

DA45 must be used with EV only.

## F. FINISH

<b>WH</b> White	<b>BL</b> Black Metallic Textured	<b>MS</b> Silver Metallic Textured	<b>FA25</b> Gold Metallic - Textured
<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic	<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured
<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured		

## G. LUMEN & WATTAGE REDUCTION (DIRECT ILLUMINATION ONLY)

<b>PR1</b> Lumen & Wattage Reduction to approximately 50% of standard output	<b>PR2</b> Lumen & Wattage Reduction to approximately 75% of standard output
--	--

PR1 is not available with 983610. Lumen reduction available for direct light only. Custom reduction percentages available upon request.



# MICRO QUAD II™ - SURFACE

## H. OPTIONAL LOW VOLTAGE

**EV** Low Voltage


---

To be used with DA45 only.




# MICRO QUAD II™ - SURFACE

## DIMENSIONAL DIAGRAMS

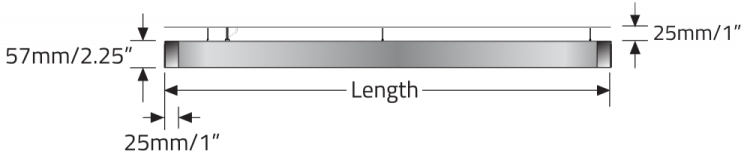

**Note:** The diffuser protrudes by 4.8mm/0.19"

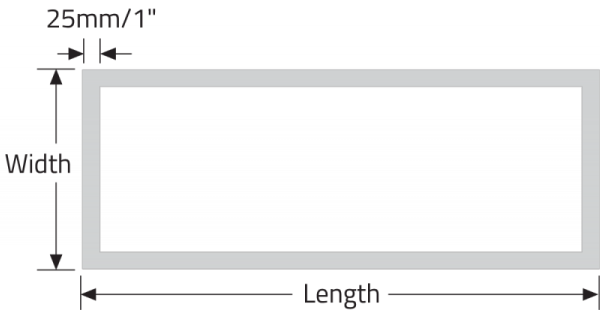

**Note:** The diffuser protrudes by 4.8mm/0.19"