


MICRO QUAD II™ - SURFACE



Project Name:

Fixture Type:

Fixture Code:

Quantities:

A. LUMINARIE LENGTH

| | | | |
|--|--|--|--|
| 983610 24", Direct, 1650 lms | 983620 36", Direct, 2474 lms | 983630 48", Direct, 3300 lms | 983640 60", Direct, 4124 lms |
| 983650 71", Direct, 4948 lms | 983660 83", Direct, 5774 lms | 983710 24", Direct/Indirect, 2018 lms | 983720 36", Direct/Indirect, 3026 lms |
| 983730 48", Direct/Indirect, 4034 lms | 983740 60", Direct/Indirect, 5044 lms | 983750 71", Direct/Indirect, 6052 lms | 983760 83", Direct/Indirect, 7060 lms |

Calculate total lumens and wattage by adding the Length lumens to the Width lumens. For example: direct only 36" length + 48" width = 2474 + 4034 = 6508 total lumens.

B. WIDTH

| | | | |
|---|---|---|--|
| WD24 24", Direct, 1650 lms | WD36 36", Direct, 2474 lms | WD48 48", Direct, 3300 lms | WD60 60", Direct, 4124 lms |
| WD71 71", Direct, 4948 lms | WD83 83", Direct, 5774 lms | WDI24 24", Direct/Indirect, 3356 lms | WDI36 36", Direct/Indirect, 3026 lms |
| WDI48 48", Direct/Indirect, 4034 lms | WDI60 60", Direct/Indirect, 5044 lms | WDI71 71", Direct/Indirect, 6052 lms | WDI83 83", Direct/Indirect, 11746 lms |

C. CCT/COLOR (DIRECT)

| | | | |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| D27 2700K (min 80 CRI) | D30 3000K (min 80 CRI) | D35 3500K (min 80 CRI) | D40 4000K (min 80 CRI) |
| DRD Red | DGN Green | DBL Blue | |

CR90 (CRI 90+) available upon request, consult factory.

D. CCT/COLOR (INDIRECT)

| | | | |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| N27 2700K (min 80 CRI) | N30 3000K (min 80 CRI) | N35 3500K (min 80 CRI) | N40 4000K (min 80 CRI) |
| NRD Red | NGN Green | NBL Blue | |

CR90 (CRI 90+) available upon request, consult factory.
* Longer than normal lead times may apply, consult factory.

E. DIMMING

| | | | |
|------------------------------|-----------------------------|-----------------------------|-----------------|
| D1 0-10V Dimming 1.0% | D4 DALI Dimming 0.1% | D5 DALI Dimming 1.0% | DA45 PoE |
|------------------------------|-----------------------------|-----------------------------|-----------------|

D4 & D5 not available with 983750 or 983760.
DA45 must be used with EV only.

F. FINISH

| | | | |
|---|-------------------------------------|--|--|
| WH White | BL Black Metallic Textured | MS Silver Metallic Textured | FA25 Gold Metallic - Textured |
| FA44 Midnight Blue Metallic - Textured | FA45 Copper Metallic | FA46 Charcoal Metallic - Textured | FA47 Bronze Metallic - Textured |
| FA52 Champagne Metallic | FA53 Red Metallic - Textured | | |

G. LUMEN & WATTAGE REDUCTION (DIRECT ILLUMINATION ONLY)

| | |
|--|--|
| PR1 Lumen & Wattage Reduction to approximately 50% of standard output | PR2 Lumen & Wattage Reduction to approximately 75% of standard output |
|--|--|

PR1 is not available with 983610. Lumen reduction available for direct light only. Custom reduction percentages available upon request.

MICRO QUAD II™ - SURFACE


H. OPTIONAL LOW VOLTAGE

EV Low Voltage

To be used with DA45 only.

MICRO QUAD II™ - SURFACE

DIMENSIONAL DIAGRAMS

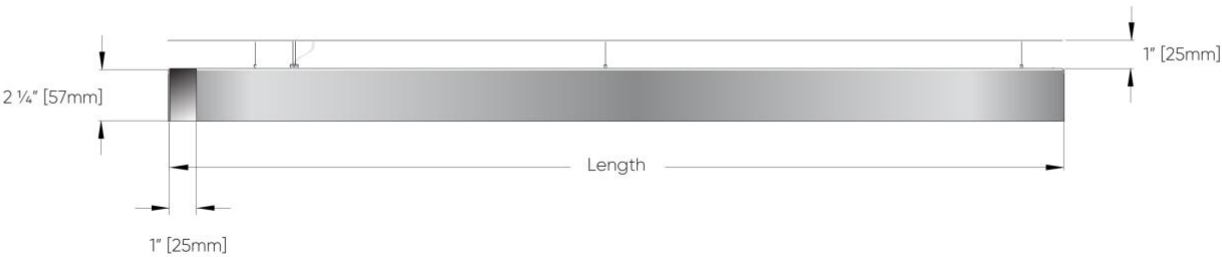

Note: The diffuser protrudes by 3/16" [5mm]



Note: The diffuser protrudes by 3/16" [5mm]