

# MICRO RING II 3D™ - SUSPENDED



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

**MREP1P01** Type A Direct, 24700lms

**MREP1P02** Type B Direct, 38400lms

**MREP2P01** Type A Direct/Indirect,  
34200 lms

**MREP2P02** Type B Direct/Indirect,  
51700 lms

## B. EFFICIENCY

**EFF1** Standard efficiency <sup>1</sup>

**EFF2** High efficiency <sup>2</sup>

<sup>1</sup> Standard efficiency refers to Standard efficacy.

<sup>2</sup> High efficiency refers to High efficacy. This option is 52% more efficient than Standard efficiency.

## C. LUMENS/FT (DIRECT)

**LPF017** 175 lm/ft <sup>1 2</sup>

**LPF026** 260 lm/ft <sup>1 2</sup>

**LPF035** 350 lm/ft <sup>1 2</sup>

**LPF052** 525 lm/ft <sup>1 2</sup>

**LPF080** 800 lm/ft <sup>2</sup>

<sup>1</sup> Standard efficiency is available from 175 lm/ft to 525 lm/ft.

<sup>2</sup> High efficiency is available from 175 lm/ft to 800 lm/ft for direct only and up to 525 lm/ft for direct/indirect.

## D. LUMENS/FT (INDIRECT)

**LPG000** Not required

**LPG017** 175 lm/ft <sup>1 2</sup>

**LPG026** 260 lm/ft <sup>1 2</sup>

**LPG035** 350 lm/ft <sup>1 2</sup>

**LPG052** 525 lm/ft <sup>2</sup>

<sup>1</sup> Standard efficiency is available from 175 lm/ft to 350 lm/ft.

<sup>2</sup> High efficiency is available from 175 lm/ft to 525 lm/ft.

## E. CRI

**CR80** CRI 80+

**CR90** CRI 90+

## F. CCT (DIRECT)

**CTA27** 2700K <sup>1</sup>

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## G. CCT (INDIRECT)

**CTB00** Not required

**CTB27** 2700K <sup>1</sup>

**CTB30** 3000K

**CTB35** 3500K

**CTB40** 4000K

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## H. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

**V4** Low Voltage <sup>3</sup>

<sup>1</sup> Not available in North America.

<sup>2</sup> Available with DA01 dimming only.

<sup>3</sup> Available with DA45 dimming only.



# MICRO RING II 3D™ - SUSPENDED

## I. DIMMING (REMOTE ONLY)

**DA01** 0-10V Dimming 1.0%

**DA20** DALI Dimming 0.1%<sup>1</sup>

**DA21** DALI Dimming 1.0%<sup>1</sup>

**DA45** PoE<sup>2</sup>

---

<sup>1</sup> DA20 & DA21 available with Types A & B, Direct only.

<sup>2</sup> Available with V4 only.

## J. FIXTURE FINISH

**FA01** White

**FA02** Black Metallic Textured

**FA20** Silver Metallic Textured

**FA25** Gold Metallic Textured

**FA27** Wood Grain - Light Cherry<sup>1</sup>

**FA28** Wood Grain - Dark Walnut<sup>1</sup>

**FA44** Midnight Blue Metallic Textured

**FA45** Copper Metallic

**FA46** Charcoal Metallic Textured

**FA47** Bronze Metallic Textured

**FA52** Champagne Metallic

**FA53** Red Metallic Textured

---

<sup>1</sup> Available for Type A's only. Longer than normal lead times may apply, consult factory.

## K. CANOPY FINISH

**CF01** White

**CF02** Black Metallic Textured

**CF20** Silver Metallic Textured

**CF25** Gold Metallic Textured

**CF44** Midnight Blue Metallic Textured

**CF45** Copper Metallic

**CF46** Charcoal Metallic Textured

**CF47** Bronze Metallic Textured

**CF52** Champagne Metallic

**CF53** Red Metallic Textured

## L. EMERGENCY

**E0** Emergency system not required


**E2** Remote emergency system




# MICRO RING II 3D™ - SUSPENDED

## DIMENSIONAL DIAGRAMS

TYPE A

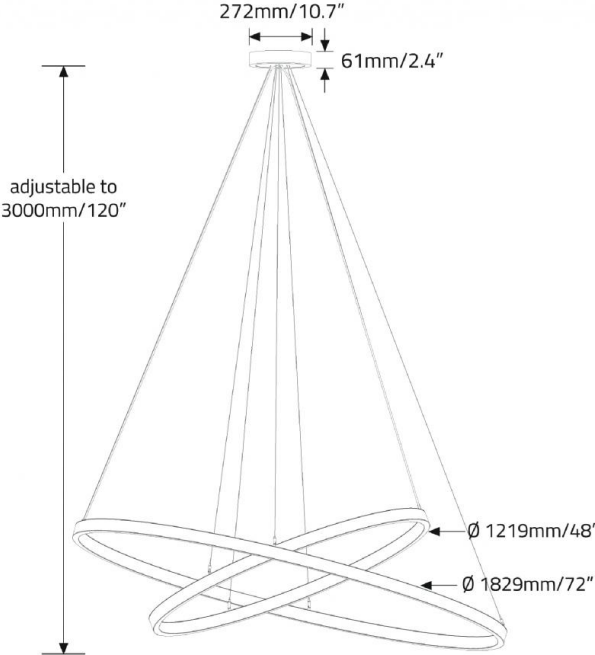

TYPE B

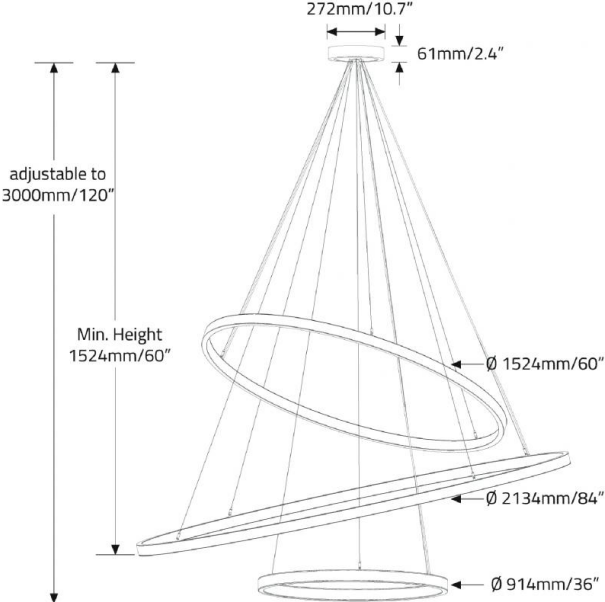

Ø 2134mm/84" - Maximum angle 15° horizontally