

# MICRO RING II™ - VERTICAL SUSPENDED



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

**MRTV2P02** 2ft Direct/Indirect, 6800  
lms

**MRTV2P03** 3ft Direct/Indirect, 10200  
lms

**MRTV2P04** 4ft Direct/Indirect, 13800  
lms

**MRTV2P05** 5ft Direct/Indirect, 17300  
lms

**MRTV2P06** 6ft Direct/Indirect, 20400  
lms

## B. EFFICIENCY

**EFF1** Standard efficiency <sup>1</sup>

**EFF2** High efficiency <sup>2</sup>

<sup>1</sup> Standard efficiency refers to Standard efficacy.

<sup>2</sup> High efficiency refers to High efficacy. This option is 52% more efficient than Standard efficiency.

## C. LUMENS/FT

**LPF017** 175 lm/ft <sup>1 2</sup>

**LPF026** 260 lm/ft <sup>1 2</sup>

**LPF035** 350 lm/ft <sup>1 2</sup>

**LPF052** 525 lm/ft <sup>2</sup>

<sup>1</sup> Standard efficiency is available from 175 lm/ft to 350 lm/ft.

<sup>2</sup> High efficiency is available from 175 lm/ft to 525 lm/ft.

## D. CRI

**CR80** CRI 80+

**CR90** CRI 90+

## E. CCT

**CTA27** 2700K

**CTA30** 3000K

**CTA35** 3500K

**CTA40** 4000K

## F. VOLTAGE

**V1** 120/277V

**V2** 240V <sup>1</sup>

**V3** 347V <sup>2</sup>

**V4** Low Voltage <sup>3</sup>

<sup>1</sup> Not available in North America.

<sup>2</sup> Available with DA01 dimming only.

<sup>3</sup> V4 available with DA45 dimming only.

## G. DIMMING

**DA01** 0-10V Dimming 1.0%

**DA20** DALI Dimming 0.1% <sup>1</sup>

**DA21** DALI Dimming 1.0% <sup>1</sup>

**DA45** PoE <sup>2</sup>

<sup>1</sup> Not available with MRTV2P05 or MRTV2P06.

<sup>2</sup> Available with V4 only.

## H. SUSPENSION

**SS1** Vertical, Remote driver

**SS3** Vertical, Driver Integral to Canopy <sup>1</sup>

**SS6** Power Over Suspension, Vertical  
Remote driver <sup>2</sup>

<sup>1</sup> Available up to 4ft diameter when using DALI dimming (DA20 & DA21).

<sup>2</sup> Available up to 5ft diameter when using DA01 and up to 4ft diameter when using DA20 or DA21.



# MICRO RING II™ - VERTICAL SUSPENDED

## I. FIXTURE FINISH

<b>FA01</b> White	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic - Textured	<b>FA25</b> Gold Metallic - Textured
<b>FA27</b> Wood grain - Light Cherry <sup>1</sup>	<b>FA28</b> Wood grain - Dark Walnut <sup>1</sup>	<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic
<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured	<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured

---

<sup>1</sup> Wood grain finishes are not available for the 2ft diameter.  
Longer than normal lead times may apply, consult factory.

## J. CANOPY FINISH

<b>CF01</b> White	<b>CF02</b> Black Metallic - Textured	<b>CF20</b> Silver Metallic - Textured	<b>CF25</b> Gold Metallic - Textured
<b>CF44</b> Midnight Blue Metallic - Textured	<b>CF45</b> Copper Metallic	<b>CF46</b> Charcoal Metallic - Textured	<b>CF47</b> Bronze Metallic - Textured
<b>CF52</b> Champagne Metallic	<b>CF53</b> Red Metallic - Textured		

## K. EMERGENCY


<b>E0</b> Not required	<b>E2</b> Emergency system - Remote
------------------------	-------------------------------------




# MICRO RING II™ - VERTICAL SUSPENDED

## DIMENSIONAL DIAGRAMS

SS1 VERTICAL - REMOTE DRIVER

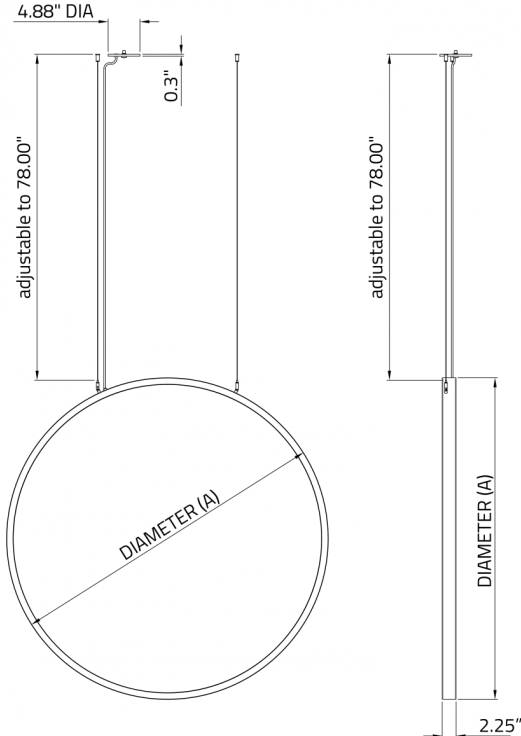

SS3 VERTICAL - INTEGRAL DRIVER

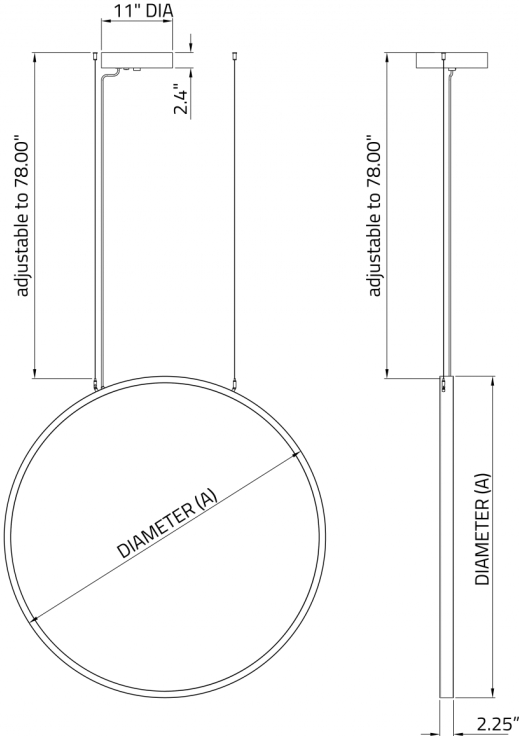

SS6 VERTICAL - REMOTE DRIVER

