

MICRO RING II™ - WALL OR CEILING SURFACE

Project Name:

Fixture Type:

Fixture Code:

Quantities:



MICRO RING II™ - WALL OR CEILING SURFACE



MICRO RING II™ - WALL OR CEILING SURFACE

MICRO RING II sets a new performance benchmark in decorative rings, boasting a best-in-class lumen efficacy of 105 LPW. This performance is not just about brightness but about the quality of light. Its high-efficiency, flexible diffuser snugly fits the frame, eliminating any light leakage while ensuring a uniform and seamless diffusion of light. The slim design of **MICRO RING II**, available in 5 diameters ranging from 2 feet to 6 feet, makes it ideal for crafting grand, multi-tiered circular installations. This versatile ring offers both direct and indirect lighting and is part of the larger MICRO RING family, which includes four additional light emission options for layered lighting effects.

Expanding your options to better meet a wide range of design requirements, we now offer a lower output **MICRO RING II**. This new addition is designed to serve your decorative needs where subtler, more atmospheric lighting is desired without compromising on the quality and uniformity of light diffusion that the **MICRO RING II** is celebrated for. Ideal for creating ambient moods in intimate settings or when a less pronounced lighting effect is required, this lower output option expands the versatility of the MICRO RING collection, ensuring that there is a ring solution for every design challenge.

GENERAL SPECIFICATION

Body and trim

Aluminium.

Diffuser

Protruding Lens 0.08" (2.1mm).

Remote Emergency

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

PoE

Integrates into your data network via Power over Ethernet (PoE) connectivity.

Reported L70 @25°C (77°F)

> 60,000 hrs.

Finish

Powder coated.

Sensors

Consult factory regarding sensor compatibility.

Drivers

Remote, HPF electronic drivers for 120-277V, 347V (EU-240V) dimming. Wire size 18 AWG - max distance (from fixture to drivers) 40' (12.2m), wire size 16 AWG - max distance 60' (18.3m), wire size 14 AWG - max distance 90' (27.4m). Drivers must be accessible after installation.

Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).


Approvals

Damp Rated.


MOUNTING & OPTICS



Ceiling Direct



Wall Direct



Direct



Declare



PoE

MICRO RING II™ - WALL OR CEILING SURFACE

HOW TO ORDER

A. LUMINAIRE

MRTC1C02 2ft, 5000 lms
MRTC1C06 6ft, 15200 lms

MRTC1C03 3ft, 7400 lms

MRTC1C04 4ft, 9500 lms

MRTC1C05 5ft, 12900 lms

B. EFFICIENCY

EFF1 Standard efficiency ¹

EFF2 High efficiency ²

¹ Standard efficiency refers to Standard efficacy.

² High efficiency refers to High efficacy. This option is 52% more efficient than Standard efficiency.

C. LUMENS

LPF017 175 lm/ft ^{1 2}
LPF080 800 lm/ft ²

LPF026 260 lm/ft ^{1 2}

LPF035 350 lm/ft ^{1 2}

LPF052 525 lm/ft ^{1 2}

¹ Standard efficiency is available from 175 lm/ft to 525 lms/ft.

² High efficiency is available from 175 lms/ft to 800 lm/ft.

D. CRI

CR80 CRI 80+

CR90 CRI 90+

E. CCT

CTA27 2700K ¹

CTA30 3000K

CTA35 3500K

CTA40 4000K

¹ Longer than normal lead times may apply, consult factory.

F. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

V4 Low Voltage ³

¹ Not available in North America.

² Available with DA01 only.

³ V4 available with DA45 dimming only.

G. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

DA45 PoE ²

¹ Not available with V3.

² Available with V4 only.

H. FINISH

FA01 White

FA02 Black Metallic - Textured

FA20 Silver Metallic

FA25 Gold Metallic - Textured

FA27 Wood grain - Light Cherry ¹

FA28 Wood grain - Dark Walnut ¹

FA44 Midnight Blue Metallic - Textured

FA45 Copper Metallic

FA46 Charcoal Metallic - Textured

FA47 Bronze Metallic - Textured

FA52 Champagne Metallic

FA53 Red Metallic - Textured

¹ Longer lead time may apply, consult factory.

I. EMERGENCY

E0 Not required

E2 Emergency system - Remote




MICRO RING II™ - WALL OR CEILING SURFACE

TECHNICAL DATA

LUMINAIRE

Code	MRTC1C02	MRTC1C03	MRTC1C04	MRTC1C05	MRTC1C06
Diameter (A)	2ft	3ft	4ft	5ft	6ft
Light Direction	Direct	Direct	Direct	Direct	Direct
Stan. Eff. Watts Max	52	77	100	135	160
Stan. Eff. Del. Lms Max	3300	4900	6300	8500	10000
Stan. Eff. LPW Max	69	69	69	69	69
High Eff. Watts Max	52	77	100	135	160
High Eff. Del. Lms Max	5000	7400	9500	12900	15200
High Eff. LPW Max	104	104	104	104	104

FINISH

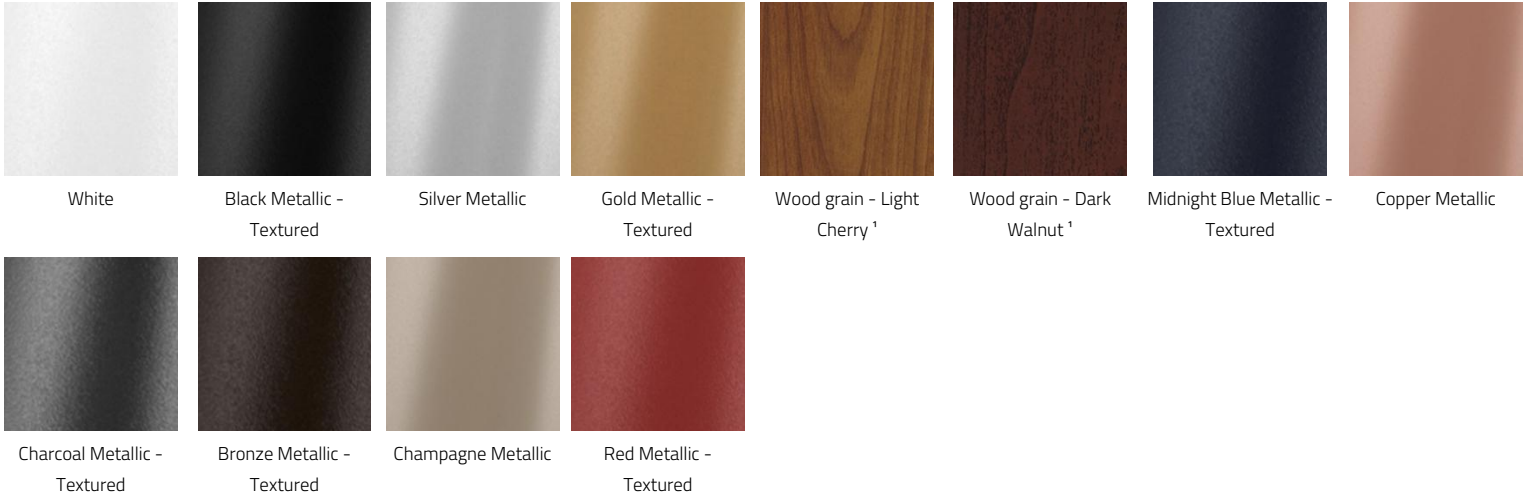

¹ Longer lead time may apply, consult factory.

APPROVALS



MICRO RING II™ - WALL OR CEILING SURFACE

DIMENSIONAL DIAGRAMS

