
Project Name: Fixture Type:

Fixture Code: Quantities:



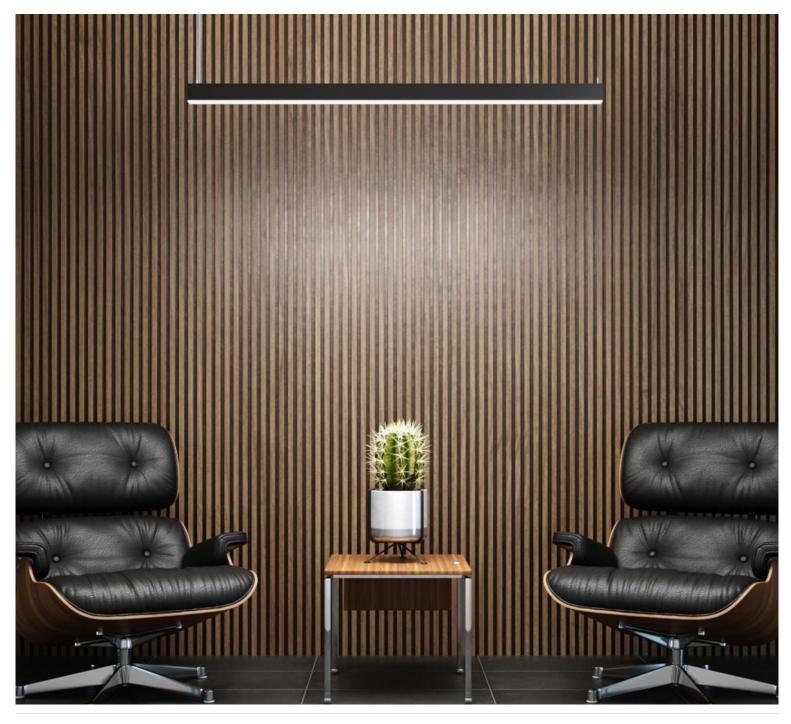

Slimline linear light only 1" in width with a high-efficiency wrap-around diffuser delivers maximum performance up to 123 LPW. An indirect light option is available with either a clear or opal diffuser. Available in 3 neutral finishes, White, Black, and Silver Metallic; as well as 2 wood grain finishes Light Cherry and Dark Walnut. Three color temperatures are available plus monochromatic red, green, and blue. Now PoE compatible.

GENERAL SPECIFICATION

Body

Aluminum.

Suspension

Stainless steel cables. Vertical suspension for remote drivers.

Remote mounting of drivers

Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.

Mechanical

Luminaires mount directly over J box (by others - North America only).

L70@25°C

> 60,000 hrs.

Lumens/ft

Direct lms/ft = 520, Direct/Indirect lms/ft = 1060,

Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

Finish

Powder coated.

Power cable

Silver braided.

Micro Straight II can integrate into your data network via Power over Ethernet (PoE) connectivity.

Lens

Frosted acrylic. Top diffuser is flat, bottom diffuser protrudes 4.8mm/0.19".

Delivered lumens

Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

Approvals

ETL C/US, CE, Damp Rated.

OPTICS & FEATURES













Declare

Direct

Direct-indirect

HOW TO ORDER

A. LUMINAIRE

AT6 72", Direct, 3309 lms AT3 36", Direct, 1510 lms AT4 48", Direct, 2068 lms AT5 60", Direct, 2647 lms

AT7 84", Direct, 3805 lms AT12 48", Direct/Indirect, 4205 lms AT8 96", Direct, 4343 lms AT11 36", Direct/Indirect, 3069 lms

AT16 96", Direct/Indirect, 8830 lms AT13 60", Direct/Indirect, 5382 lms AT14 72", Direct/Indirect, 6727 lms AT15 84", Direct/Indirect, 7736 lms

Direct Ims/ft = 520, Direct/Indirect Ims/ft = 1060.

B. CCT/COLOR (DIRECT)

J1 2700K (min 80 CRI) J2 3000K (min 80 CRI) J3 3500K (min 80 CRI) J4 4000K (min 80 CRI)

J7 Red J9 Blue J8 Green

C. CCT/COLOR (INDIRECT)

KO Indirect CCT/Color not required K1 2700K (min 80 CRI) **K2** 3000K (min 80 CRI) K3 3500K (min 80 CRI)

K4 4000K (min 80 CRI) K7 Red **K8** Green K9 Blue

D. INDIRECT LENS

UO Not required **U1** Clear U2 Opal

E. DIMMING

DA45 PoE **D1** 0-10V Dimming (1.0%) D4 DALI Dimming (0.1%) D5 DALI Dimming (1.0%)

Remote drivers only. D4 for use in North America only.

DA45 must be used with EV only.

F. FINISH

F1 White F2 Black Metallic Textured F20 Silver Metallic Textured F27 Wood grain - Light Cherry 1

FA25 Gold Metallic - Textured FA44 Midnight Blue Metallic - Textured F28 Wood grain - Dark Walnut 1 FA45 Copper Metallic

FA46 Charcoal Metallic - Textured FA47 Bronze Metallic - Textured FA52 Champagne Metallic FA53 Red Metallic - Textured

Note: The canopy will be white for fixtures with the wood grain finishes F27 & F28.

¹ Available upon request and longer than normal lead times may apply, consult factory.

G. LUMEN OUTPUT

LO 100% of standard output L1 Lumen & wattage reduction to L2 Lumen & wattage reduction to L3 Lumen & wattage reduction to approximately 75% of standard output approximately 50% of standard output approximately 25% of standard output

L3 is not available with AT3, AT4, AT5 & AT11. L2 is not available with AT3. Custom reduction percentages available upon request.

H. OPTIONAL LOW VOLTAGE

EV Low Voltage

To be used with DA45 only.

TECHNICAL DATA

LUMINAIRE

Direct Ims/ft = 520, Direct/Indirect Ims/ft = 1060.

Code	AT3	AT4	AT5	AT6	AT7	AT8
Straight	36"	48"	60"	72"	84"	96"
Version	Direct	Direct	Direct	Direct	Direct	Direct
Wattage	13W	17W	22W	28W	32W	37W
Delivered Ims	1510	2068	2647	3309	3805	4343
LPW	121	122	120	120	119	117
Code	AT11	AT12	AT13	AT14	AT15	AT16
Straight	36"	48"	60"	72"	84"	96"
Version	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect
	Direct maneet	Direct/indirect	Direct/indirect	Direct/indirect	Direct/iridirect	Direct/indirect
Wattage	25W	34W	44W	55W	63W	73W
Wattage Delivered Ims						

FINISH



Note: The canopy will be white for fixtures with the wood grain finishes F27 & F28.

APPROVALS











IP2(

¹ Available upon request and longer than normal lead times may apply, consult factory.

DIMENSIONAL DIAGRAMS

