

# MICRO STRAIGHT II™ - SUSPENDED



Project Name:

Fixture Type:

Fixture Code:

Quantities:

## A. LUMINAIRE

<b>AT3</b> 36", Direct, 1510 lms	<b>AT4</b> 48", Direct, 2068 lms	<b>AT5</b> 60", Direct, 2647 lms	<b>AT6</b> 72", Direct, 3309 lms
<b>AT7</b> 84", Direct, 3805 lms	<b>AT8</b> 96", Direct, 4343 lms	<b>AT11</b> 36", Direct/Indirect, 3069 lms	<b>AT12</b> 48", Direct/Indirect, 4205 lms
<b>AT13</b> 60", Direct/Indirect, 5382 lms	<b>AT14</b> 72", Direct/Indirect, 6727 lms	<b>AT15</b> 84", Direct/Indirect, 7736 lms	<b>AT16</b> 96", Direct/Indirect, 8830 lms

Direct lms/ft = 520, Direct/Indirect lms/ft = 1060.

## B. CCT/COLOR (DIRECT)

<b>J1</b> 2700K (min 80 CRI) <sup>1</sup>	<b>J2</b> 3000K (min 80 CRI)	<b>J3</b> 3500K (min 80 CRI)	<b>J4</b> 4000K (min 80 CRI)
<b>J7</b> Red	<b>J8</b> Green	<b>J9</b> Blue	

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## C. CCT/COLOR (INDIRECT)

<b>K0</b> Indirect CCT/Color not required	<b>K1</b> 2700K (min 80 CRI) <sup>1</sup>	<b>K2</b> 3000K (min 80 CRI)	<b>K3</b> 3500K (min 80 CRI)
<b>K4</b> 4000K (min 80 CRI)	<b>K7</b> Red	<b>K8</b> Green	<b>K9</b> Blue

<sup>1</sup> Longer than normal lead times may apply, consult factory.

## D. UPLIGHT DIFFUSER

<b>U0</b> Uplight diffuser not required	<b>U1</b> Clear diffuser	<b>U2</b> Opal diffuser
---	--------------------------	-------------------------

## E. DIMMING

<b>D1</b> 0-10V Dimming (1.0%)	<b>D4</b> DALI Dimming (0.1%)	<b>D5</b> DALI Dimming (1.0%)	<b>DA45</b> PoE
--------------------------------	-------------------------------	-------------------------------	-----------------

Remote drivers only. D4 for use in North America only.

DA45 must be used with EV only.

## F. FINISH

<b>F1</b> White	<b>F2</b> Black Metallic Textured	<b>F20</b> Silver Metallic Textured	<b>F27</b> Wood grain - Light Cherry <sup>1</sup>
<b>F28</b> Wood grain - Dark Walnut <sup>1</sup>	<b>FA25</b> Gold Metallic - Textured	<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic
<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured	<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured

**Note:** The canopy will be white for fixtures with the wood grain finishes F27 & F28.

<sup>1</sup> Available upon request and longer than normal lead times may apply, consult factory.

## G. LUMEN OUTPUT

<b>L0</b> 100% of standard output	<b>L1</b> Lumen & wattage reduction to approximately 75% of standard output	<b>L2</b> Lumen & wattage reduction to approximately 50% of standard output	<b>L3</b> Lumen & wattage reduction to approximately 25% of standard output
-----------------------------------	---	---	---

L3 is not available with AT3, AT4, AT5 & AT11. L2 is not available with AT3. Custom reduction percentages available upon request.



# MICRO STRAIGHT II™ - SUSPENDED

## H. OPTIONAL LOW VOLTAGE

**EV** Low Voltage



---

To be used with DA45 only.



# MICRO STRAIGHT II™ - SUSPENDED

## DIMENSIONAL DIAGRAMS

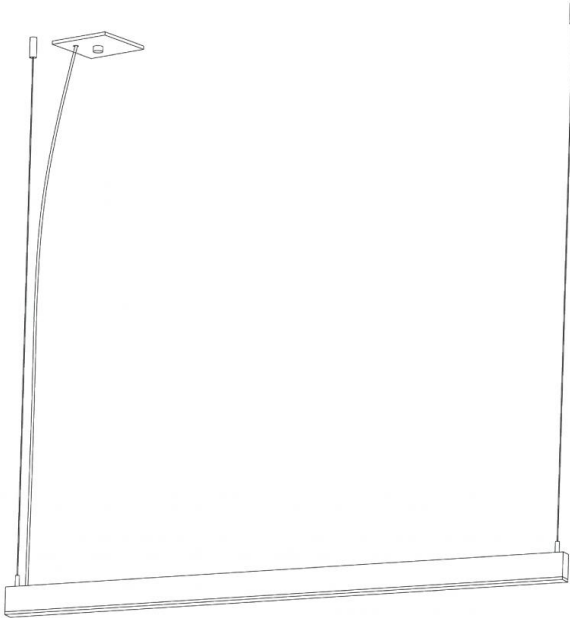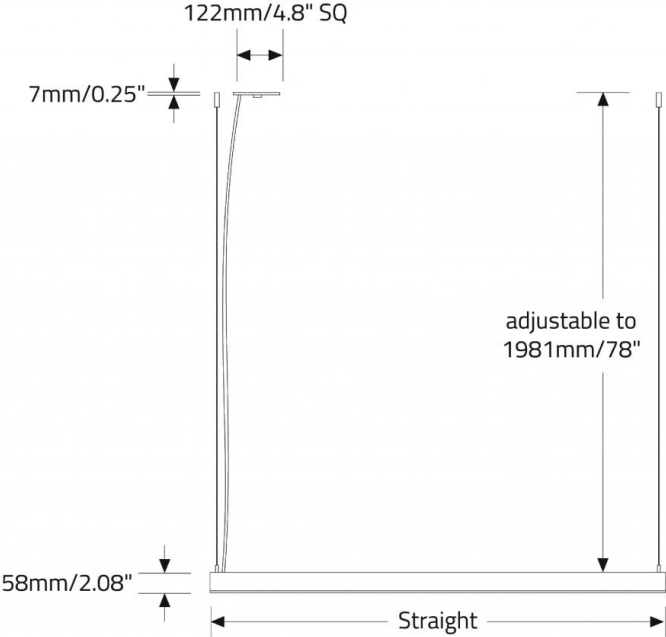

ISO VIEW