



MICRO TRIANGLE II™ - SUSPENDED

Project Name:	Fixture Type:
Fixture Code:	Quantities:

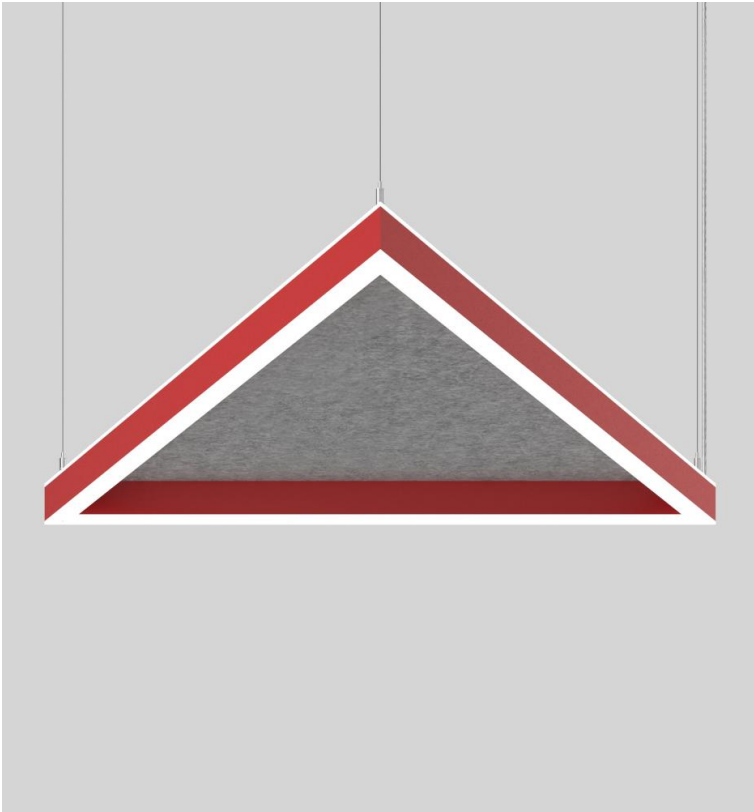

MICRO TRIANGLE II™ - SUSPENDED

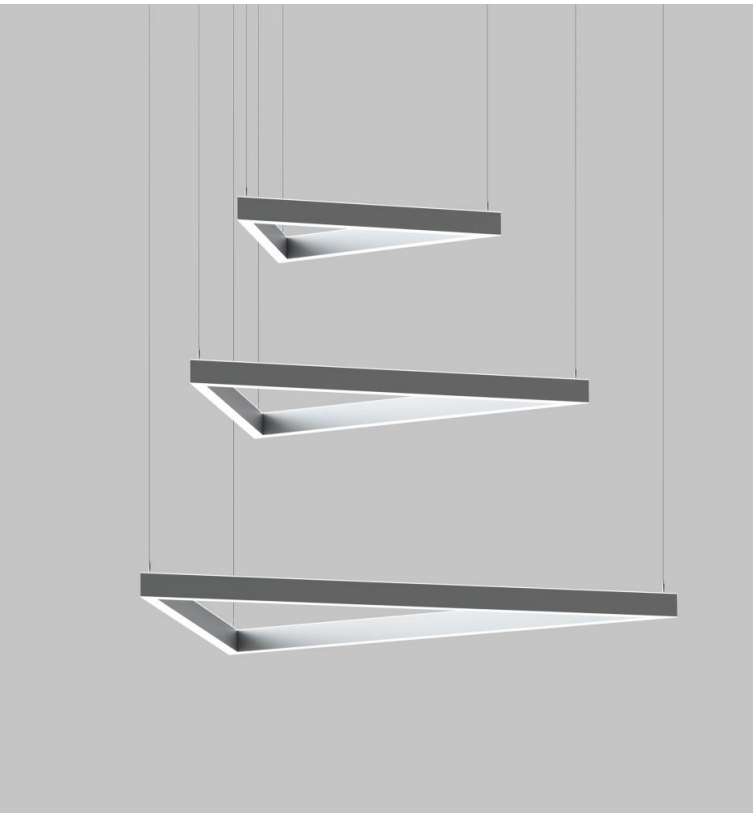

MICRO TRIANGLE II™ - SUSPENDED

The triangle shape is a powerful way to create an edgy and energetic aesthetic. With a super-slim 1" profile and 5 sizes ranging from 2' to 6', **MICRO TRIANGLE II** is ideal for offsetting symmetrical layouts. The light emission is direct only or direct/indirect and can be coordinated with MICRO TRIANGLE SE which emits light from the inner side of the frame. For sound comfort, **MICRO TRIANGLE II** is available with an acoustic panel designed to absorb echo and reverberation associated with open-concept spaces, exposed concrete, open ceilings, and large windows.

GENERAL SPECIFICATION

Body

Aluminum, Equilateral Triangle

Suspension

Steel cables.

Remote Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Drivers

Remote HPF electronic drivers for 120-277V (EU-240V). The driver is integral to the fixture canopy or remote mount depending on which options are selected.

Acoustic Panels NRC Rating

0.80

Acoustic Panels Material

100% recycled polyester fiber (PET).

PoE

Micro Triangle II can integrate into your data network via Power over Ethernet (PoE) connectivity.

Sensors

Consult factory regarding sensor compatibility.

Reported L70 @25°C (77°F)

> 60,000 hrs.

Seismic Bracing

Seismic bracing kits are available to meet compliance requirements. Consult the factory for details.

Finish

Powder coated.

Power cable

Silver braided.

Remote Mounting Of Drivers

Wire size 18 AWG - max distance (from fixture to drivers) 40' (12.2m), wire size 16 AWG - max distance 60' (18.3m), wire size 14 AWG - max distance 90' (27.4m). Drivers must be accessible after installation.

Mechanical

Luminaires mount directly over J box (by others - North America only).

Acoustic Panels Fire Rating

ASTM E84-2018 Class A.

Acoustic Panels Thickness

12mm (0.5")

Delivered Lumens

Delivered lumens & LPW based on 4000K (min 80 CRI).

Diffusers

Frosted acrylic.

Approvals

Damp Rated.

Acoustic Panel Maintenance


Durable and easy to maintain. Dust regularly and clean marks with mild detergent, rinse, and blot.

MICRO TRIANGLE II™ - SUSPENDED

OPTICS & FEATURES



Suspended Direct



Suspended Direct/Indirect



Acoustic



Direct



Direct/Indirect



Declare



PoE

MICRO TRIANGLE II™ - SUSPENDED

HOW TO ORDER

A. LUMINAIRE

MTTP1P02 2ft, Direct 2600 lms	MTTP1P03 3ft, Direct 3900 lms	MTTP1P04 4ft, Direct, 5100 lms	MTTP1P05 5ft, Direct, 6500 lms
MTTP1P06 6ft, Direct, 7800 lms	MTTP2P02 2ft, Direct/Indirect, 5200 lms	MTTP2P03 3ft, Direct/Indirect, 7900 lms	MTTP2P04 4ft, Direct/Indirect, 10400 lms
MTTP2P05 5ft, Direct/Indirect, 13100 lms	MTTP2P06 6ft, Direct/Indirect, 15700 lms		

B. LUMENS (DIRECT)

LPF021 215 lm/ft ¹	LPF032 320 lm/ft ²	LPF043 430 lm/ft ³	
--------------------------------------	--------------------------------------	--------------------------------------	--

¹ Based of 50% of total output
² Based on 75% of total output.
³ 100% of total output.

C. LUMENS (INDIRECT)

LPG000 Not required	LPG021 215 lm/ft ¹	LPG032 320 lm/ft ²	LPG043 430 lm/ft ³
----------------------------	--------------------------------------	--------------------------------------	--------------------------------------

¹ Based of 50% of total output.
² Based on 75% of total output.
³ 100% of total output.

D. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

E. CCT (DIRECT)

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

F. CCT (INDIRECT)

CTB00 Not required	CTB27 2700K ¹	CTB30 3000K	CTB35 3500K
CTB40 4000K			

¹ Longer than normal lead times may apply, consult factory.

G. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ Not available in North America.
² Available with DA01 dimming only.
³ Available with DA45 dimming only.

H. DIMMING (REMOTE)

DA01 0-10V Dimming 1.0%	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹	DA45 PoE ²
--------------------------------	--	--	------------------------------

¹ Not available with V3.
² Available with V4 only.

MICRO TRIANGLE II™ - SUSPENDED

I. SUSPENSION

SS1 Vertical, Remote driver	SS2 Hub, Remote driver	SS3 Vertical, Driver Integral to Canopy	SS4 Hub, Driver Integral to Canopy
SS6 POS, Vertical, Remote driver			

¹ Available up to 48" diameter max.
² MTTP2P05 available with DA01 dimming only. Not available with MTTP2P06.
³ Available in North America only. Max 60W, max 72" long.
MTTP1P05 and MTTP1P06 available with DA01 dimming only.
Not available with MTTP2P05 and MTTP2P06.

J. FIXTURE FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA25 Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹	FA28 Wood grain - Dark Walnut ¹	FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic
FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	FA52 Champagne Metallic	FA53 Red Metallic - Textured

Longer lead times may apply, consult factory.

K. CANOPY FINISH

CF01 White	CF02 Black Metallic - Textured	CF20 Silver Metallic - Textured	CF25 Gold Metallic - Textured
CF44 Midnight Blue Metallic - Textured	CF45 Copper Metallic	CF46 Charcoal Metallic - Textured	CF47 Bronze Metallic - Textured
CF52 Champagne Metallic	CF53 Red Metallic - Textured		

L. ACOUSTIC PANEL FINISH

AP00 Not required	AP02 Citrus	AP04 White	AP08 Red Coffee
AP11 Light Gray	AP13 Apple Green	AP22 Blue	AP26 Sesame Gray
AP27 Black	AP47 Navy Peony	AP60 Pure Red	AP73 Cloudburst
AP89 Douglas Fir	APW01 Oak		

Sizes above 48" include a visible seam.
For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages.
Other finishes available. Contact factory.

M. EMERGENCY

E0 Not required	E2 Emergency system - Remote
------------------------	-------------------------------------

N. CIRCUITS

CS1 Single Circuit	CS2 Dual circuit
---------------------------	-------------------------

MICRO TRIANGLE II™ - SUSPENDED









TECHNICAL DATA





LUMINAIRE

Code	MTTP1P02	MTTP1P03	MTTP1P04	MTTP1P05	MTTP1P06	MTTP2P02
Length	24"	36"	48"	60"	72"	24"
Light Direction	Direct	Direct	Direct	Direct	Direct	Direct/Indirect
Wattage	20W	30W	40W	50W	60W	40W
Delivered lms	2600	3900	5100	6500	7800	5200
LPW	129	129	129	129	129	131

Code	MTTP2P03	MTTP2P04	MTTP2P05	MTTP2P06
Length	36"	48"	60"	72"
Light Direction	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect
Wattage	60W	80W	100W	120W
Delivered lms	7900	10400	13100	15700
LPW	131	131	131	131

FIXTURE FINISH


							
White	Black Metallic - Textured	Silver Metallic - Textured	Gold Metallic - Textured	Wood grain - Light Cherry ¹	Wood grain - Dark Walnut ¹	Midnight Blue Metallic - Textured	Copper Metallic

			
Charcoal Metallic - Textured	Bronze Metallic - Textured	Champagne Metallic	Red Metallic - Textured

Longer lead times may apply, consult factory.

MICRO TRIANGLE II™ - SUSPENDED

CANOPY FINISH

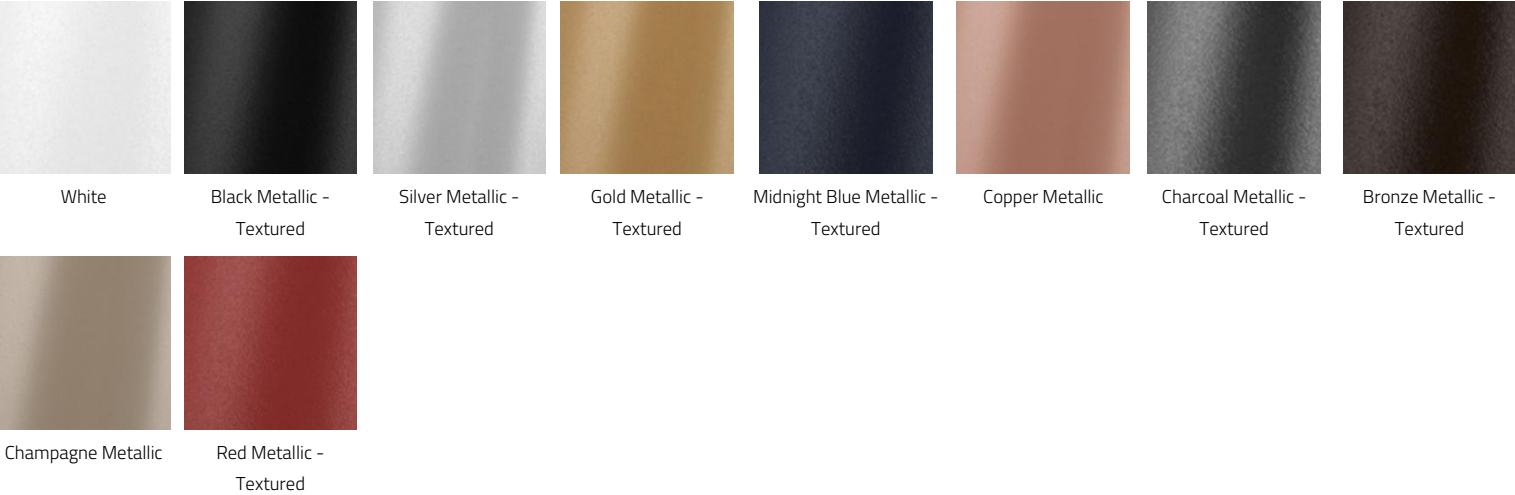

ACOUSTIC PANEL FINISH



Sizes above 48" include a visible seam.

For accompanying non-illuminating acoustic panels, see our Acoustic Circles, Quads, Triangles, and Ellipse spec pages.

Other finishes available. Contact factory.


APPROVALS




MICRO TRIANGLE II™ - SUSPENDED

DIMENSIONAL DIAGRAMS


SS1
Vertical - Remote Driver

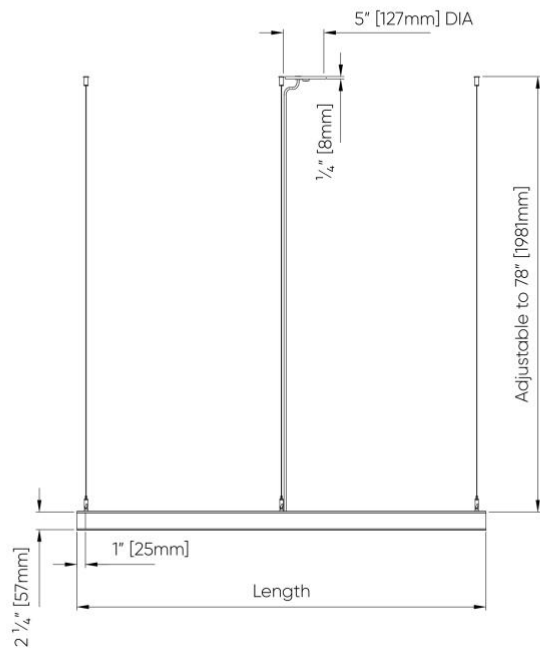


SS2
Hub - Remote Driver

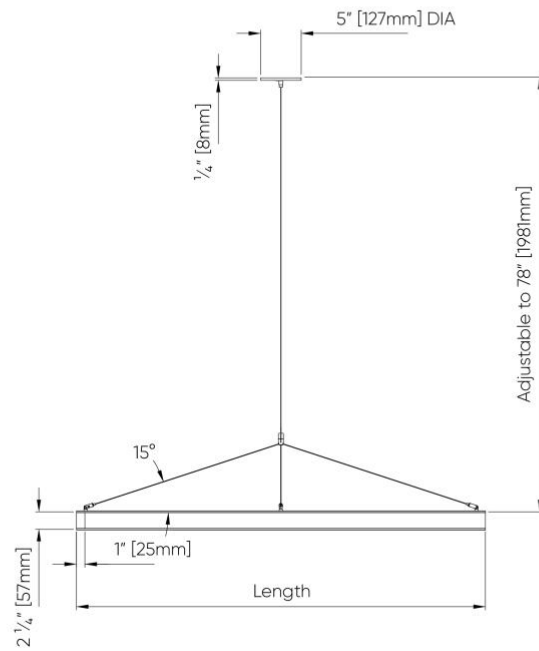

SS3
Vertical - Integral Driver

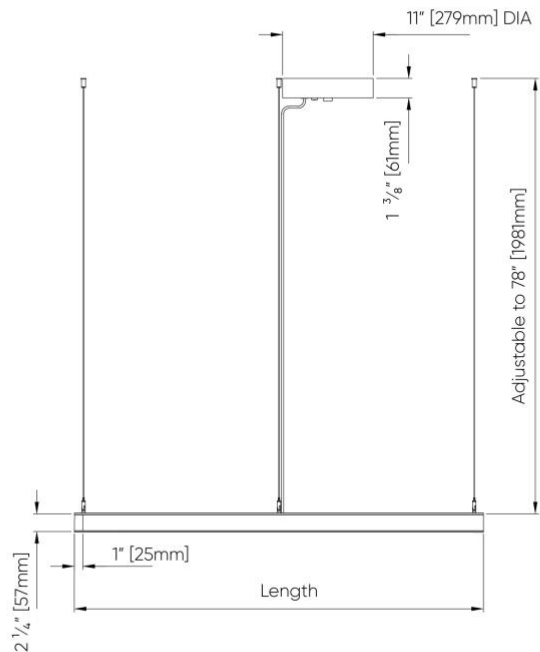


SS4
Hub - Integral Driver

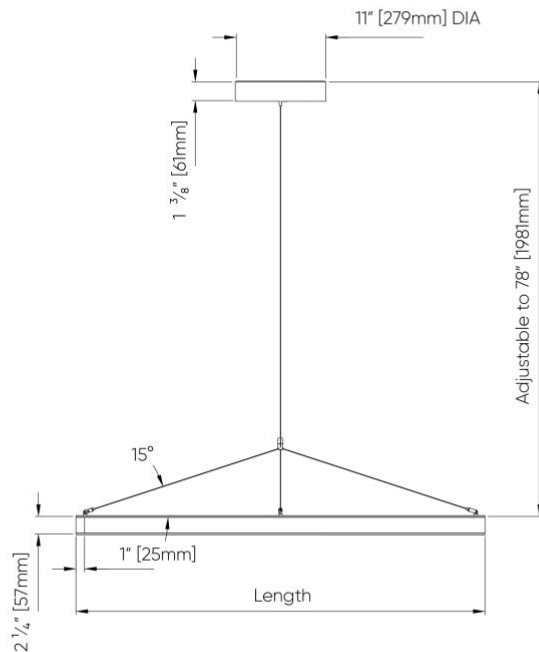

MICRO TRIANGLE II™ - SUSPENDED

SS6
Vertical - Remote Driver

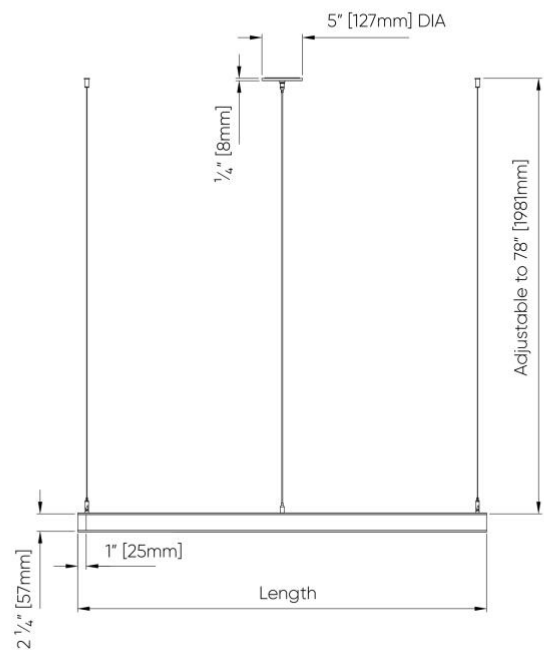

Power Over Suspension

