
Project Name: Fixture Type:

Fixture Code: Quantities:

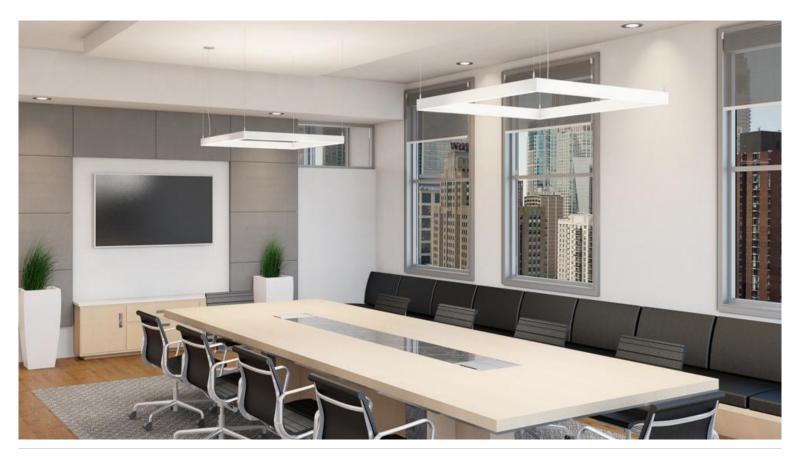

## **GENERAL SPECIFICATION**

Body

Aluminum.

Suspension

Stainless steel cables.

**Drivers** 

HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

Mechanical

Luminaires mount directly over J box (by others - North America only).

L70 @25°C

> 50,000 hrs.

#### **OPTICS & FEATURES**





Suspended Direct Suspended Direct/Indirect

#### Finish

Powder coated.

#### Power cable

Silver braided

#### **Remote Mounting Of Drivers**

Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.

#### Lens

Frosted Polycarbonate.

#### **Delivered Lumens**

Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.

#### **HOW TO ORDER**

#### A. LUMINAIRE

**983130** 983130

 983005 983005
 983010 983010
 983020 983020
 983030 983030

 983040 983040
 983105 983105
 983110 983110
 983120 983120

# B. CCT/COLOR (DIRECT)

**D30** 3000K (min 80 CRI) **D35** 3500K (min 80 CRI) **D40** 4000K (min 80 CRI) **DRD** Red

**DGN** Green **DBL** Blue

#### C. CCT/COLOR (INDIRECT)

**N30** 3000K (min 80 CRI) **N35** 3500K (min 80 CRI) **N40** 4000K (min 80 CRI) **NRD** Red

NGN Green NBL Blue

#### **D. SUSPENSION**

**S1** Vertical, Remote Driver **S3** Vertical, Integral Driver **S5** Integral Driver

983140 983140

## E. FINISH

**BL** Black **MS** Silver Metallic **WH** White **Z1** Wood Grain - Light Cherry

**Z2** Wood Grain - Dark Walnut

# **TECHNICAL DATA**

#### **LUMINAIRE**

Code 983	3005	983010	983020	983030	983040	983105
<b>Size (A)</b> 24"	"	35"	46"	62"	73"	24"
<b>Light Direction</b> Dire	ect I	Direct	Direct	Direct	Direct	Direct/Indirect
Power (LED) 26V	W	39W	51W	70W	83W	52W
Delivered Ims 313	31	4689	6225	8574	10102	6467
<b>LPW</b> 120	0	120	122	122	122	124
Code 983	3110	983120	983130	983140		
<b>Size (A)</b> 35"	" .	46"	62"	73"		
<b>Light Direction</b> Dire	ect/Indirect I	Direct/Indirect	Direct/Indirect	Direct/Indirect		
Power (LED) 77V	W	102W	141W	166W		
<b>Delivered Ims</b> 968	85	12858	17709	20866		
<b>LPW</b> 126	6	126	126	126		

# **APPROVALS**















## **DIMENSIONAL DIAGRAMS**

#### S1 Vertical - Remote Driver

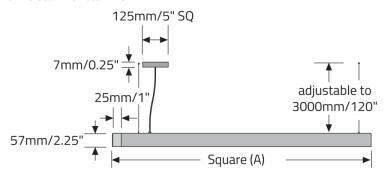


## S3 Vertical - Integral Driver

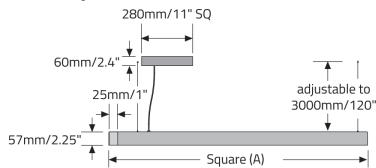

**Direct/Indirect:** Available upto 1168mm/46" sq only.

## S5 - Integral Driver

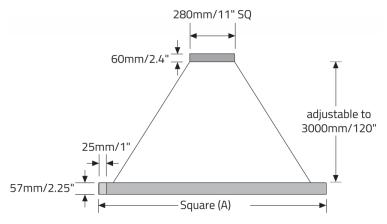

Direct/Indirect: Available upto 1168mm/46" sq only.