




# MIDI ARC V™

## FULL SPECIFICATION SHEET

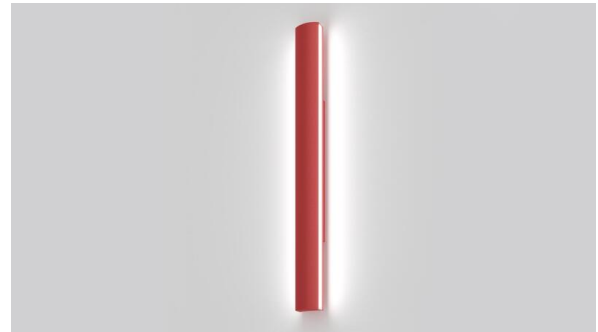

FIXTURE TYPE



FIXTURE CODE




QUANTITIES


### 1 DESCRIPTION

**MIDI ARC's** Curved edge softens architectural lines and raises the impact of distinctive spaces. The smooth edges of **MIDI ARC** add a sleek and enticing appearance. Available in 4 distinct sizes, the **MIDI ARC** series offers 12 finish options for a look that truly represents your vision and enhances the curvature of the profile. The curved edge design brings a softer architectural profile to the space. The series also comes with multiple lumen packages to choose from so that you can illuminate your space in the most optimal way.


### 2 OPTICS & FEATURES



Front View Wall  
Mount (Midi Arc  
V)



General Diffuse



Declare

### 3 APPROVALS



**4 GENERAL SPECIFICATION**

**BODY**

Aluminum.

**LENS**

Frosted acrylic

**REMOTE EMERGENCY**

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

**DRIVERS**

HPF electronic drivers for 120-277V (EU 240V).

**REPORTED L70 @25°C(77°F)**

> 60,000 hrs.

**SUSTAINABILITY**

Designed for on-site LED board, driver, and optic replacement. Contact the factory for maintenance documentation.

**FINISH**

Powder coated for standard finishes.

**SENSORS**

Consult factory regarding sensor compatibility.

**MECHANICAL**

Luminaires mount directly over 2" (50.8mm) x 3" (76.2mm) switch box (by others).

**DELIVERED LUMENS**

Delivered lumens & LPW based on 4000K CRI 80+.

**APPROVALS**

Damp Rated.

**5 DESIGN OPTIONS**


**FINISH**



White



White -  
Gloss




Black  
Metallic -  
Textured



Silver  
Metallic



Gold Metallic  
- Textured




Polished  
Aluminum -  
Mirror finish




Midnight  
Blue Metallic  
- Textured




Copper  
Metallic




Charcoal  
Metallic -  
Textured



Bronze  
Metallic -  
Textured



Champagne  
Metallic



Red Metallic  
- Textured

**6** HOW TO ORDER

**1. LUMINAIRE**

**MAVW1W01** 12", 1000 lms      **MAVW1W02** 24", 2000 lms      **MAVW1W03** 36", 3000 lms      **MAVW1W04** 47", 4000 lms  
**MAVW1W06** 70", 6000 lms

Delivered lumens shown at max output.

**2. LUMENS**

**LMA0100** 1000 lm      **LMA0150** 1500 lm      **LMA0200** 2000 lm      **LMA0250** 2500 lm  
**LMA0300** 3000 lm      **LMA0350** 3500 lm      **LMA0400** 4000 lm      **LMA0600** 6000 lm

Lumens shown at nominal value.

**3. CRI**

**CR80** CRI 80+      **CR90** CRI 90+

**4. CCT**

**CTA27** 2700K      **CTA30** 3000K      **CTA35** 3500K      **CTA40** 4000K

**5. VOLTAGE**

**V1** 120/277V      **V2** 240V <sup>1</sup>

<sup>1</sup> Not available in North America.

**6. DIMMING**

**DA01** 0-10V Dimming 1.0%

**7. FINISH**

**FA01** White      **FA56** White - Gloss      **FA02** Black Metallic - Textured      **FA20** Silver Metallic  
**FA25** Gold Metallic - Textured      **FA42** Polished Aluminum - Mirror finish      **FA44** Midnight Blue Metallic - Textured      **FA45** Copper Metallic  
**FA46** Charcoal Metallic - Textured      **FA47** Bronze Metallic - Textured      **FA52** Champagne Metallic      **FA53** Red Metallic - Textured

**8. EMERGENCY**

**E0** Not required      **E1** Emergency system - Integral <sup>1</sup>      **E2** Emergency system - Remote

<sup>1</sup> Available for MAVW1P04 & MAVW1P06 only in conjunction with V2. Not available in North America.

**7** TECHNICAL DATA



**LUMINAIRE**

Delivered lumens shown at max output.

<b>Code</b>	<b>MAVW1W01</b>	<b>MAVW1W02</b>	<b>MAVW1W03</b>	<b>MAVW1W04</b>	<b>MAVW1W06</b>
<b>Length (A)</b>	12"	24"	36"	47"	70"
<b>Wattage</b>	9W	17W	26W	34W	51W
<b>Delivered lms</b>	1000	2000	3000	4000	6000
<b>LPW</b>	117	117	117	117	117
<b>Length (B)</b>	7"	18"	18"	23"	23"

---

**8** DIMENSIONAL DIAGRAMS

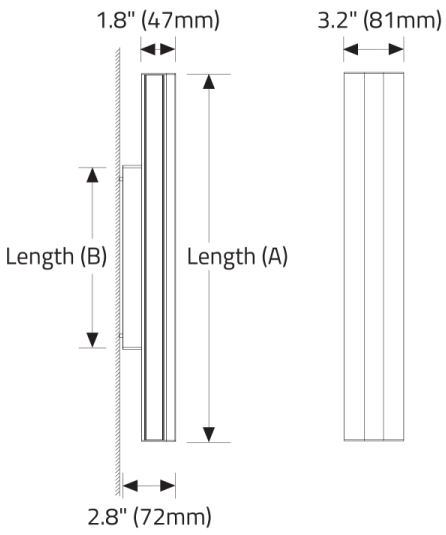

ISOMETRIC VIEW