

MIDI ARC V™ - WALL SURFACE

Project Name:

Fixture Type:

Fixture Code:

Quantities:



MIDI ARC V™ - WALL SURFACE



MIDI ARC V™ - WALL SURFACE

MIDI ARCs Curved edge softens architectural lines and raises the impact of distinctive spaces. The smooth edges of **MIDI ARC** add a sleek and enticing appearance.

GENERAL SPECIFICATION

Body

Aluminum.

Diffuser

Frosted acrylic

Remote emergency

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Drivers

HPF electronic drivers for 120-277V (EU 240V).

Reported L70 @25°C (77°F)

> 60,000 hrs.

Finish

Powder coated for standard finishes.

Sensors

Consult factory regarding sensor compatibility.

Mechanical

Luminaires mount directly over 2" (50.8mm) x 3" (76.2mm) switch box (by others).

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 80+.

Approvals

Damp Rated.

MOUNTING & OPTICS



Front View Wall Mount (Midi Arc V)



General Diffuse



Declare

MIDI ARC V™ - WALL SURFACE

HOW TO ORDER

A. LUMINAIRE

MAVW1W01 12", 1000 lms	MAVW1W02 24", 2000 lms	MAVW1W03 36", 3000 lms	MAVW1W04 47", 4000 lms
MAVW1W06 70", 6000 lms			

Delivered lumens shown at max output.

B. LUMENS

LMA0100 1000 lm	LMA0150 1500 lm	LMA0200 2000 lm	LMA0250 2500 lm
LMA0300 3000 lm	LMA0350 3500 lm	LMA0400 4000 lm	LMA0600 6000 lm

Lumens shown at nominal value.
Consult website for available lumens/length.

C. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

D. CCT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

E. VOLTAGE

V1 120/277V	V2 240V ¹
--------------------	-----------------------------

¹ Not available in North America.

F. DIMMING

DA01 0-10V Dimming 1.0%

G. FINISH

FA01 White	FA56 White - Gloss	FA02 Black Metallic - Textured	FA20 Silver Metallic
FA25 Gold Metallic - Textured	FA42 Polished Aluminum - Mirror finish	FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic
FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	FA52 Champagne Metallic	FA53 Red Metallic - Textured

H. EMERGENCY

E0 Not required	E1 Emergency system - Integral ¹	E2 Emergency system - Remote
------------------------	--	-------------------------------------

¹ Available for MAVW1P04 & MAVW1P06 only in conjunction with V2. Not available in North America.

MIDI ARC V™ - WALL SURFACE


TECHNICAL DATA

LUMINAIRE

Delivered lumens shown at max output.

Code	MAVW1W01	MAVW1W02	MAVW1W03	MAVW1W04	MAVW1W06
Length (A)	12"	24"	36"	47"	70"
Wattage	9W	17W	26W	34W	51W
Delivered lms	1000	2000	3000	4000	6000
LPW	117	117	117	117	117
Length (B)	7"	18"	18"	23"	23"

FINISH


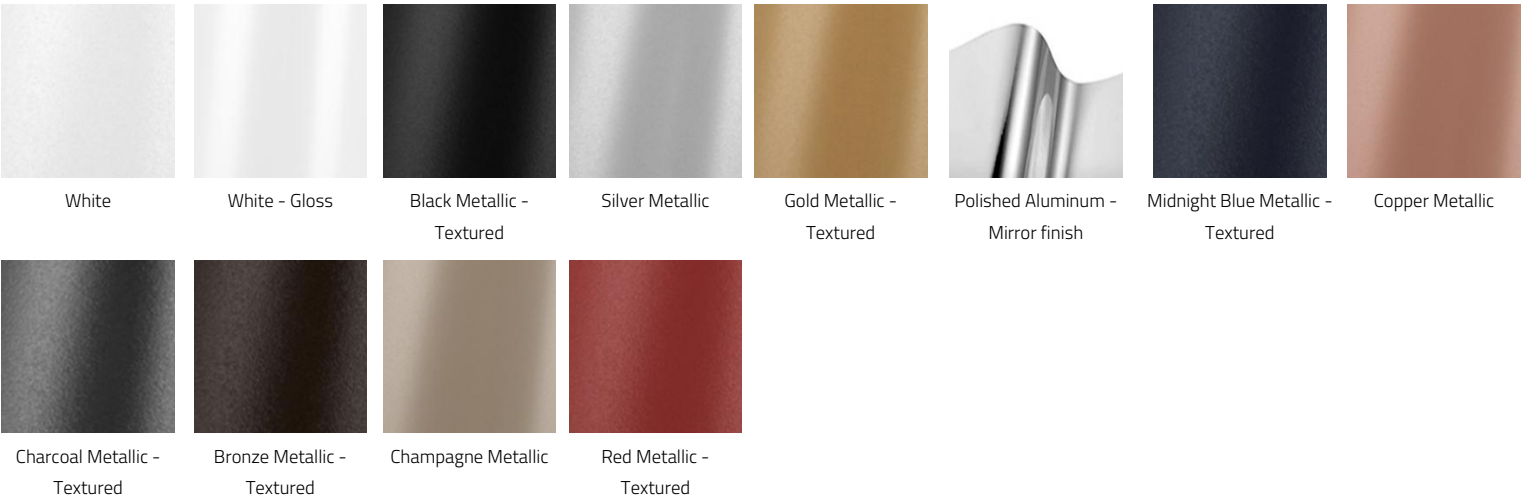


APPROVALS



MIDI ARC V™ - WALL SURFACE

DIMENSIONAL DIAGRAMS

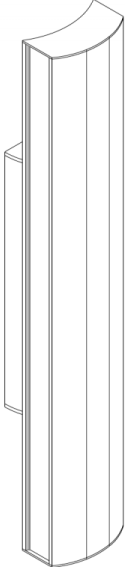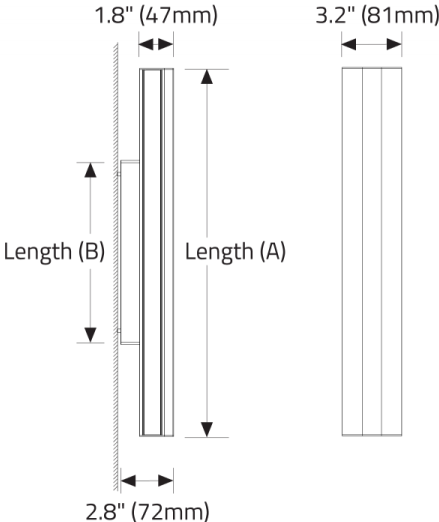

ISOMETRIC VIEW