






# MIDI ARC V™


## FULL SPECIFICATION SHEET

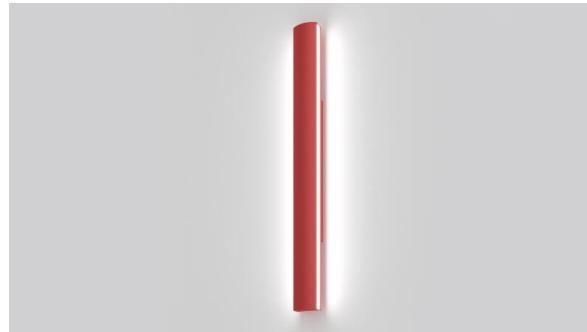

Fixture Type



Fixture Code




Quantities


### 1 DESCRIPTION

**MIDI ARC's** Curved edge softens architectural lines and raises the impact of distinctive spaces. The smooth edges of **MIDI ARC** add a sleek and enticing appearance. Available in 4 distinct sizes, the **MIDI ARC** series offers 12 finish options for a look that truly represents your vision and enhances the curvature of the profile. The curved edge design brings a softer architectural profile to the space. The series also comes with multiple lumen packages to choose from so that you can illuminate your space in the most optimal way.

### 2 OPTICS & FEATURES



Front View Wall  
Mount (Midi Arc  
V)



General Diffuse



Declare

### 3 APPROVALS



**4** GENERAL SPECIFICATION**BODY**

Aluminum.

**LENS**

Frosted acrylic

**REMOTE EMERGENCY**

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

**DRIVERS**

HPF electronic drivers for 120-277V (EU 240V).

**REPORTED L70 @25°C(77°F)**

> 60,000 hrs.

**FINISH**

Powder coated for standard finishes.

**SENSORS**

Consult factory regarding sensor compatibility.

**MECHANICAL**

Luminaires mount directly over 2" (50.8mm) x 3" (76.2mm) switch box (by others).

**DELIVERED LUMENS**

Delivered lumens & LPW based on 4000K CRI 80+.

**APPROVALS**

Damp Rated.

**5** DESIGN OPTIONS**FINISH**

**6 HOW TO ORDER****1. LUMINAIRE**

<b>MAVW1W01</b> 12", 1000 lms	<b>MAVW1W02</b> 24", 2000 lms	<b>MAVW1W03</b> 36", 3000 lms	<b>MAVW1W04</b> 47", 4000 lms
<b>MAVW1W06</b> 70", 6000 lms			

Delivered lumens shown at max output.

**2. LUMENS**

<b>LMA0100</b> 1000 lm	<b>LMA0150</b> 1500 lm	<b>LMA0200</b> 2000 lm	<b>LMA0250</b> 2500 lm
<b>LMA0300</b> 3000 lm	<b>LMA0350</b> 3500 lm	<b>LMA0400</b> 4000 lm	<b>LMA0600</b> 6000 lm

Lumens shown at nominal value.

**3. CRI**

<b>CR80</b> CRI 80+	<b>CR90</b> CRI 90+
---------------------	---------------------

**4. CCT**

<b>CTA27</b> 2700K	<b>CTA30</b> 3000K	<b>CTA35</b> 3500K	<b>CTA40</b> 4000K
--------------------	--------------------	--------------------	--------------------

**5. VOLTAGE**

<b>V1</b> 120/277V	<b>V2</b> 240V <sup>1</sup>
--------------------	-----------------------------

<sup>1</sup> Not available in North America.

**6. DIMMING**

<b>DA01</b> 0-10V Dimming 1.0%
--------------------------------

**7. FINISH**

<b>FA01</b> White	<b>FA56</b> White - Gloss	<b>FA02</b> Black Metallic - Textured	<b>FA20</b> Silver Metallic
<b>FA25</b> Gold Metallic - Textured	<b>FA42</b> Polished Aluminum - Mirror finish	<b>FA44</b> Midnight Blue Metallic - Textured	<b>FA45</b> Copper Metallic
<b>FA46</b> Charcoal Metallic - Textured	<b>FA47</b> Bronze Metallic - Textured	<b>FA52</b> Champagne Metallic	<b>FA53</b> Red Metallic - Textured

**8. EMERGENCY**

<b>E0</b> Not required	<b>E1</b> Emergency system - Integral <sup>1</sup>	<b>E2</b> Emergency system - Remote
------------------------	--	-------------------------------------



<sup>1</sup> Available for MAVW1P04 & MAVW1P06 only in conjunction with V2. Not available in North America.

**7 TECHNICAL DATA****LUMINAIRE**

Delivered lumens shown at max output.

<b>Code</b>	<b>MAVW1W01</b>	<b>MAVW1W02</b>	<b>MAVW1W03</b>	<b>MAVW1W04</b>	<b>MAVW1W06</b>
<b>Length (A)</b>	12"	24"	36"	47"	70"
<b>Wattage</b>	9W	17W	26W	34W	51W
<b>Delivered Lms</b>	1000	2000	3000	4000	6000
<b>LPW</b>	117	117	117	117	117
<b>Length (B)</b>	7"	18"	18"	23"	23"

8 DIMENSIONAL DIAGRAMS

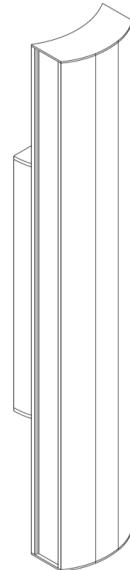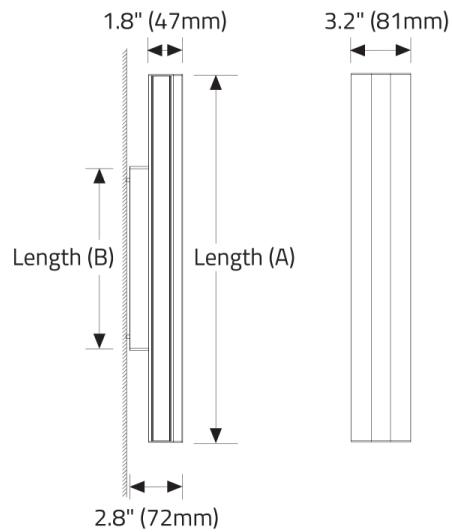

ISOMETRIC VIEW